Verified RealEstate™

Your trusted partner for buying, selling, and managing property, ensuring hassle-free service with 100% transparency.

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996

Official Property Record

Digitally Verified Record - Powered by Verified RealEstate™



409

CONSULTANTS	GEO MINES ENGINEERS PVT. LTD. GEOTECHNICAL ENGINEERING DIVISION, No. 96, 3RD FLOOR, VELLALAR STREET, MOGAPPAIR WEST, CHENNAI-37 Ph. No. 98413 16631, 9840157478 Email: geomines@gmail.com, gmepl77@gmail.com Website: www.geominesengineers.com
CLIENT	M/s. RAMANIYAM REALTORS LLP, CHENNAI
PROJECT	PROPOSED CONSTRUCTION OF RESIDENTIAL BUILDING (STILT+05) AT NEW DOOR NO: 30, OLD DOOR NO: 20, CANAL ROAD, RANGANATHAPURAM, THIRUVANMIYUR, CHENNAI-600041
TITLE	GEOTECHNICAL INVESTIGATION REPORT

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

For Geo Mines Engineers Pvt Ltd

Director

GEOMINES ENGINEERS (P) LTD. GMEPL Chennai

REV.	DATE	REPORT NUMBER	PREP. BY
0	03-10-2023	GMEPL/M/s. RAMANIYAM REALTORS LLP/330/2023-24	

Report recd
6/10/23

DISCLAIMER

We've been asked to look into the ground and identify and quantify everything that mother nature has put thereand predict how those materials will react to construction and long-term performance of a facility - and we may fall short of this lofty goal.

We have made reasonable and prudent conclusions but a cloud of uncertainty inherently looms over the project as per the pre and post facilities laid and their elemental behaviour on the mother soil.

Also, the variable nature of soil strata and it's varying characteristics may make the recommended foundation system disqualify and hence it's recommended that special care shall be taken by the owner during and after the construction is complete and during the run period of the building.

GEOMINES ENGINEERS (P) LTD. GMEPL Chennai

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

CONTENTS

	SEC. NO.		PAGE NO.
		REPORT COVER PAGE	I
		CONTENTS	I
CHAPTER-1		**INTRODUCTION**	
	1.0	Preamble	1
	1.1	Scope of Work	1
	1.2	Structure of the Report	1
CHAPTER-2		**INVESTIGATION METHODOLOGY & TEST RESULTS**	
	2.0	Field Testing	2
	2.1	Preamble	2
	2.2	Equipment Used and Method of Drilling	2
	2.2.1	Equipment Used	2
	2.2.2	Method of Drilling	2
	2.3	In-situ Strength Tests	2
	2.3.1	Standard Penetration Tests	2
	2.4	Collection of Samples	2
	2.4.1	Disturbed Soil Samples	2
	2.4.2	Ground Water	3
	2.5	Summary of Field Work	3
	2.6	Laboratory Testing	3
	2.6.1	Coarse Grained Soil Samples	3
	2.6.1.1	Grain Size Analysis Tests	3
	2.6.2	Fine Grained Soil Samples	3
	2.6.2.1	Index Property & Free Swell Tests	3
	2.6.3	Chemical Analysis Tests	3
	2.6.3.1	Water Samples	3
FIGURES	2.0	Site Plan representing the locations of Field investigation points	4
	2.1	Soil Profile at BH-01 Location	5
	2.2	Soil Profile at BH-02 Location	6
TABLES	2.1	Laboratory Test Results on the Soil Samples collected from BH-01 Location	7
	2.2	Laboratory Test Results on the Soil Samples collected from BH-02 Location	8
	2.2	Chemical Analysis Test Results on the Water Samples collected from borehole Locations	9
CHAPTER-3		**SUB-SURFACE STRATIFICATION**	
	3.0	Preamble	10
	3.1	Sub surface Stratification	10
	3.1.1	Soil Profile at BH-01 Location	10
	3.1.2	Soil Profile at BH-02 Location	11-12

CHAPTER-4		**FOUNDATION SYSTEM**	
	4.0	Preamble	13
	4.1	Bearing Strata Characteristics	13
	4.2	Foundation System	14
	4.2.1	Deep Foundation System-15.00m long Bored Cast-in-Situ Friction cum End Bearing Piles	14
CHAPTER-5		**RECOMMENDATIONS**	15-16
ANNEXURE		Design of Deep Foundation System (Refer. BH-01)	17-19
		Computations for Lateral Load Capacity of Pile	20-22

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

CHAPTER-1

INTRODUCTION

1.0 Preamble

M/s. Ramaniyam Realtors LLP, Chennai proposed to construct a **Residential Building (Stilt+05) at New Door No: 30, Old Door No: 20, Canal Road, Ranganathapuram, Thiruvanmiyur, Chennai-600041.**

For the purpose of designing the foundations, the responsibility of carrying out suitable soil investigation was entrusted to M/s. Geo Mines ENGINEERS Pvt. Ltd., Chennai.

This report contains the field and laboratory test results along with Design computations and recommendations for suitable foundation systems.

1.1 Scope of Work

- Sinking Two Standard Soil investigation bore holes of 150mm diameter up to a depth of 15.00m below existing ground level as directed by the engineer-in-charge.
- Conducting Standard Penetration Test (SPT) at regular depth intervals.
- Collection of Split Spoon Samples or Disturbed Soil Samples
- Collection of water samples from each bore hole.
- Conducting relevant laboratory test results.

For Ramaniyam Realtors LLP

Authorised Signatory

1.2 Structure of the Report

- Contents
- Introduction
- Investigation Methodology & Test Results
- Figures & Tables
- Sub-Surface Stratification
- Foundation Systems
- Recommendations
- Annexure (Design Computations)

For Ramaniyam Realtors LLP

Authorised Signatory

CHAPTER-2

INVESTIGATION METHODOLOGY & TEST RESULTS

2.0 Field Testing:

2.1 Preamble:

Two standard soil investigation boreholes were put. The equipment used and the methodology adopted to carry out the fieldwork is described below.

2.2 Equipment Used and Method of Drilling:

2.2.1 Equipment Used

The equipment used for performing the drilling operations was a Calyx Rotary Drill Rig with direct mud circulation technique. The drill mud used was made out of Sodium Bentonite.

2.2.2 Methodology of drilling

In the soil strata, the drilling operations were carried out using special drill bits and cutters coupled with direct mud circulation.

2.3 In-Situ Strength Tests:

2.3.1 Standard Penetration Test:

Standard penetration tests were conducted at the borehole locations, in accordance with IS: 2131. The tests were conducted at every change of strata up to the depth of termination of the borehole as directed by the engineer-in-charge.

2.4. Collection of Samples:

2.4.1 Disturbed Soil Samples

The SPT-samples collected were used as disturbed soil samples. These samples were used for visual and physical identification and for conducting laboratory classification tests as per I.S.1498-1970.

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

2.4.2 Ground Water

For conducting suitable chemical tests, the ground water samples were collected from the respective boreholes.

2.5 Summary of Field Work

The locations of the boreholes are shown in site plan given in Fig. 2.0. The soil profiles obtained at each location is shown in Figs. 2.1 & 2.2.

2.6 Laboratory Testing:

2.6.1 Coarse Grained Samples:

2.6.1.1 Grain size Analysis Tests:

On the coarse-grained soil samples, grain size distribution tests were conducted as per I.S.2720 (Part 4)-1985, to know the gradation characteristics and to classify them. These results are presented in Tables 2.1 & 2.2.

2.6.2 Fine Grained Samples:

2.6.2.1 Index Property – Free Swell Tests:

Atterberg Limits were carried out on fine grained soil samples to evaluate the limits of different consistency states. Generally Liquid limits, Plastic limits and Shrinkage Limits tests were conducted as per I.S.2720 (Part-5)-1985 and I.S.2720 (Part 6)-1972. On such type of soil strata encountered at the investigation locations, such tests were conducted and the test results are presented in Tables 2.1 & 2.2.

2.6.3 Chemical Analysis Tests:

2.6.3.1 Water Samples:

On representative water samples, chemical analysis tests were conducted to estimate pH, Chlorides and Sulphates. These results are presented in Table-2.3.

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

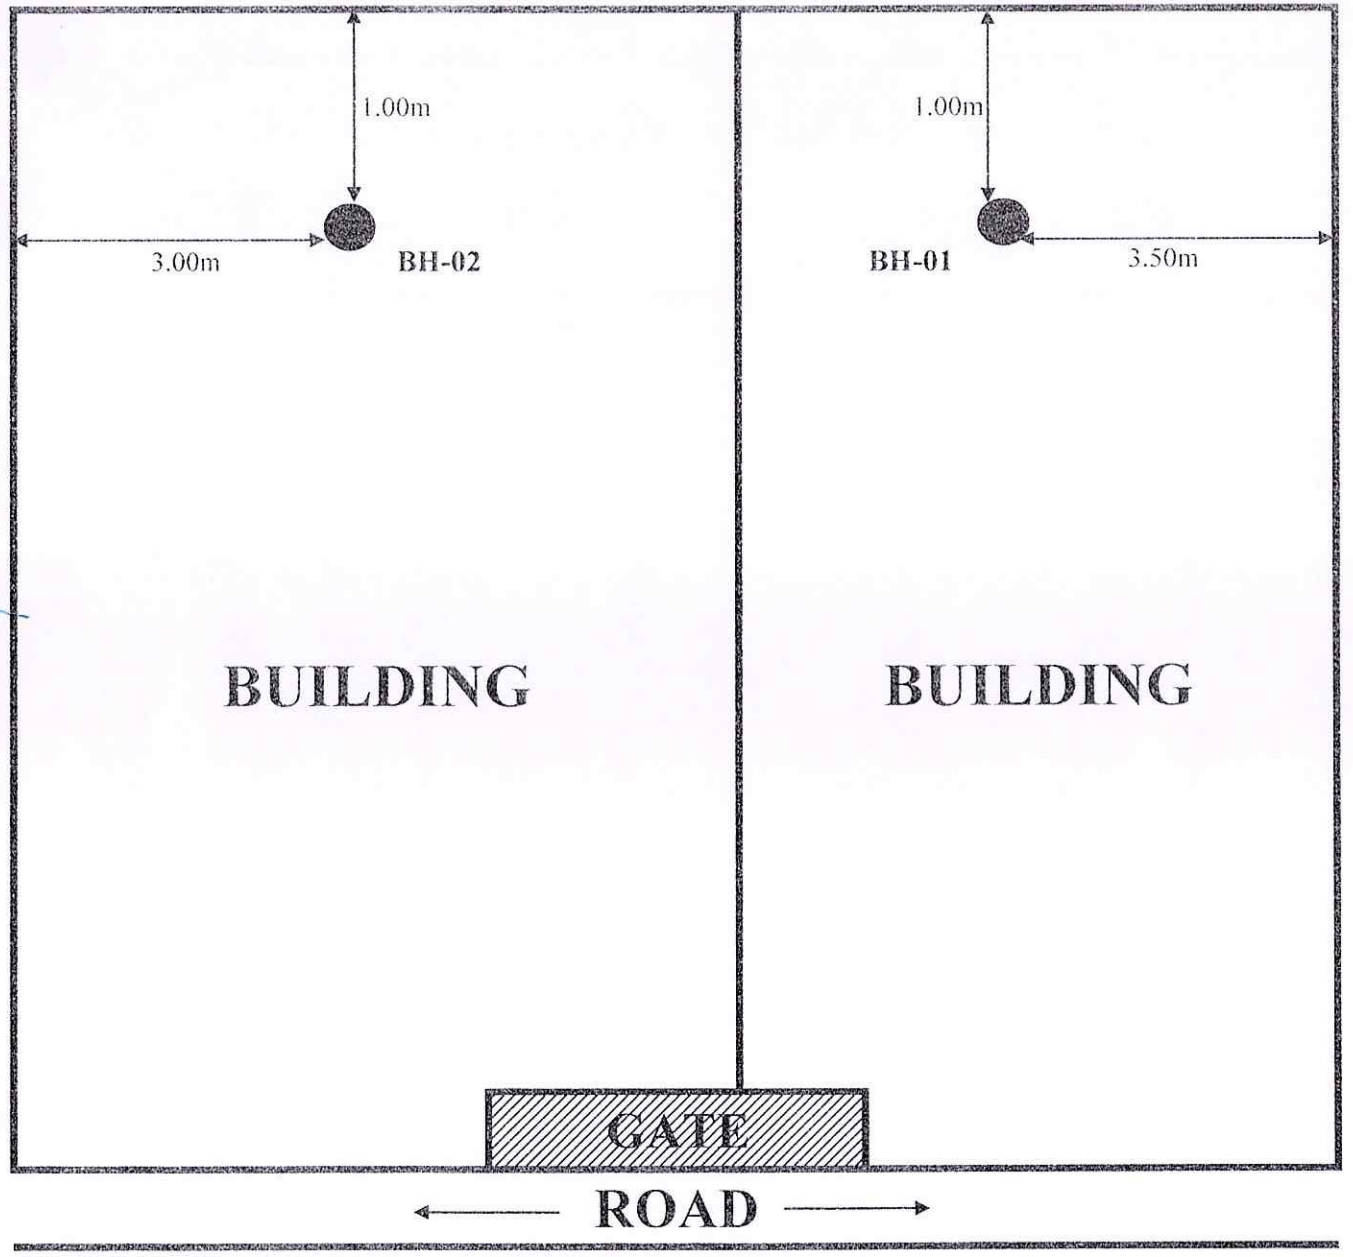


Fig. 2.0: Site Plan Representing the locations of Field Investigation Points

For Ramaniyam Realtors LLP
Authorised Signatory

For Ramaniyam Realtors LLP
Authorised Signatory

Project : Proposed Construction of Residential Building (Stilt+05) at New Door No: 30, Old Door No: 20, Canal Road, Ranganathapuram, Thiruvanmiyur, Chennai-600041

Location: BH-01

Started On : 26/09/2023; Ended On : 26/09/2023 G.W.T: 1.50m below existing ground level

R.L of Layer (m)	G.W.T. (m)	Soil Profile	Engineering Description of Soil	Depth of SPT below E.G.L (m)	SPT - Details 0-15 cm	15-30 cm	30-45 cm	N-Value	Graphical Representation of SPT (0 10 20 30 40 50 60 70 80 90)	Relative Density/Consistency	Type of Sample
G.W.T 2.00	↓		Blackish Soft Silty Clay	1.50	2	2	2	4		Soft	SS
4.00			Blackish Medium Stiff Silty Clay	3.00	2	3	2	5		M.Stiff	SS
5.50			Greyish Loose Silty Fine Sand	4.50	3	4	7	11		Loose	SS
				6.00	4	7	11	18		M.Dense	SS
			Greyish Medium Dense Silty Fine Sand	7.50	6	8	15	23		M.Dense	SS
				9.00	7	11	18	29		M.Dense	SS
10.00				10.00	6	12	21	33		Dense	SS
			Greyish Dense Silty Fine Sand	12.00	3	17	24	41		Dense	SS
14.50				14.00	8	22	26	48		Dense	SS
15.20			Weathered Rock	15.00	SPT Hammer Rebound					V.Dense	SS

Bore Hole Terminated at a depth of 15.20m below the existing ground level

Fig. 2.1 Soil Profile at BH-01 Location

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

Project : Proposed Construction of Residential Building (Stilt+05) at New Door No: 30, Old Door No: 20, Canal Road, Ranganathapuram, Thiruvanmiyur, Chennai-600041

Location: BH-02

Started On : 28/09/2023: Ended On : 28/09/2023 G.W.T: 1.50m below existing ground level

R.L of Layer (m)	G.W.T. (m)	Soil Profile	Engineering Description of Soil	SPT - Details: Depth of SPT below E.G.L (m)	0-15 cm	15-30 cm	30-45 cm	N-Value	Graphical Representation of SPT (0 10 20 30 40 50 60 70 80 90)	Relative Density/Consistency	Type of Sample
G.W.T	▼		Blackish Medium Stiff Silty Clay	1.50	2	3	3	6		M.Stiff	SS
				3.00	3	4	3	7		M.Stiff	SS
4.00											
			Greyish Loose Silty Fine Sand	4.50	5	6	9	15		Loose	SS
5.50											
			Greyish Medium Dense Silty Fine Sand	6.00	4	8	13	21		M.Dense	SS
				7.50	7	12	15	27		M.Dense	SS
9.00				9.00	9	17	19	36		Dense	SS
			Greyish Dense Silty Fine Sand	10.00	8	16	26	42		Dense	SS
				12.00	10	19	27	46		Dense	SS
13.00											
			Weathered Rock	14.00	SPT Hammer Rebound					V.Dense	SS
14.20											

Bore Hole Terminated at a depth of 14.20m below the existing ground level

Fig. 2.2 Soil Profile at BH-02 Location

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

Table 2.1: Laboratory Test Results on the Soil Samples Collected from BH-01

Depth of Sample below E.G.L. (m)	SPT of Sample	Type of Sample	Engineering Description of Soil	NMC(%)	Natural Density (g/cc)	Clay					Relative Density/ Consistency	Sieve Analysis						IS-Classification
						LL (%)	PL (%)	PI	I_c	FS		Gravel (%)	Coarse (%)	Medium (%)	Fine (%)	Silt (%)	Clay (%)	
0.00 to 2.00	14	SS	Silty Clay	31	1.7	53	29	24	0.92	9	Stiff	0	0	0	0	19	81	CH
2.00 to 4.00	5	SS	Silty Clay	43	1.5	59	26	33	0.48	-	M.Stiff	0	0	0	0	16	84	CH
4.00 to 5.50	11	SS	Silty Fine Sand	-	1.5	-	-	-	-	-	Loose	0	0	0	77	23	0	SM
5.50 to 10.00	23	SS	Silty Fine Sand	-	1.7	-	-	-	-	-	M.Dense	0	0	3	79	18	0	SM
10.00 to 14.50	40	SS	Silty Fine Sand	-	1.9	-	-	-	-	-	Dense	0	0	7	80	13	0	SM
14.50 to 15.20	>100	SS	Weathered Rock	-	2.0	-	-	-	-	-	V.Dense	37	15	22	17	9	0	SDR

Table 2.2: Laboratory Test Results on the Soil Samples Collected from BH-02

Depth of Sample below E.G.L. (m)	SPT of Sample	Type of Sample	Engineering Description of Soil	NMC(%)	Natural Density (g/cc)	Clay					Relative Density/ Consistency	Sieve Analysis						IS-Classification
						LL (%)	PL (%)	PI	I_c	FS		Gravel (%)	Coarse (%)	Medium (%)	Fine (%)	Silt (%)	Clay (%)	
0.00 to 4.00	6	SS	Silty Clay	41	1.5	56	28	28	0.54	11	M.Stiff	0	0	0	0	17	83	CH
4.00 to 5.50	15	SS	Silty Fine Sand	-	1.5	-	-	-	-	-	Loose	0	0	0	78	22	0	SM
5.50 to 9.00	24	SS	Silty Fine Sand	-	1.7	-	-	-	-	-	M.Dense	0	0	0	81	19	0	SM
9.00 to 13.00	41	SS	Silty Fine Sand	-	1.9	-	-	-	-	-	Dense	0	0	4	81	15	0	SM
13.00 to 14.20	>100	SS	Weathered rock	-	2.00	-	-	-	-	-	V.Dense	39	13	16	21	11	0	SDR

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

420

Table 2.3: Chemical Analysis Results conducted on Water Samples collected from BH-01 & BH-02				
Location	Depth of Sample below E.G.L. (m)	pH	Chlorides (ppm)	Sulphates (ppm)
BH-01	3.00	6.67	299.81	149.38
BH-01	3.00	6.66	303.48	149.99

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

CHAPTER-3

SUB-SURFACE STRATIFICATION

3.0 Preamble

The sub surface stratification at borehole locations, with respect to foundation/geotechnical engineering application are derived based on the visual identification, laboratory classification tests and field in-situ strength tests. Further, the strength parameters are estimated based on the in-situ strength test results as per the following correlation.

* **For Coarse Grained Samples, Ref. Fig.1, IS: 6403 to estimate Angle of Shearing Resistance.**
* **For Fine Grained Samples, Ref. Terzaghi & Peck, 1948, to estimate Unconfined Compressive Strength.**

3.1 Sub Surface Stratification:

3.1.1 Soil Profile at BH-01 Location

(At BH-01 Location, as presented in Site plan)

* **Layer-1 (from E.G.L to 2.00m depth)**

Type of Strata	Silty Clay
Colour	Blackish
Thickness of Layer	2.00m
SPT of the layer	04
Consistency	Soft
Un-drained Cohesion, Cu	26.66kPa

* **Layer-2 (from 2.00m to 4.00m depth)**

Type of Strata	Silty Clay
Colour	Blackish
Thickness of Layer	2.00m
SPT of the layer	05
Consistency	Medium Stiff
Un-drained Cohesion, Cu	33.33kPa

* **Layer-3 (from 4.00m to 5.50m depth)**

Type of Strata	Silty Fine Sand
Colour	Greyish
Thickness of Layer	1.50m
SPT of the layer	11
Relative Density	Loose
Angle of Shearing Resistance, ϕ	30.30^0

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

* **Layer-4 (from 5.50m to 10.00m depth)**

Type of Strata	Silty Fine Sand
Colour	Greyish
Thickness of Layer	4.50m
SPT of the layer	23
Relative Density	Medium Dense
Angle of Shearing Resistance, ϕ	33.90^0

* **Layer-5 (from 10.00m to 14.50m depth)**

Type of Strata	Silty Fine Sand
Colour	Greyish
Thickness of Layer	4.50m
SPT of the layer	40
Relative Density	Dense
Angle of Shearing Resistance, ϕ	38.75^0

* **Layer-6 (from 14.50m to 15.20m depth)**

Type of Strata	Weathered Rock
Colour	-
Thickness of Layer	0.70m
SPT of the layer	>100
Relative Density	Very Dense
Angle of Shearing Resistance, ϕ	42.50^0

Ground Water

Ground water table was encountered at a depth of 1.50m below the existing ground level during the last week of September 2023.

3.1.2 Soil Profile at BH-02 Location
(At BH-02 Location, as presented in Site plan)

* **Layer-1 (from E.G.L to 4.00m depth)**

Type of Strata	Silty Clay
Colour	Blackish
Thickness of Layer	4.00m
SPT of the layer	06
Consistency	Medium Stiff
Un-drained Cohesion, Cu	40.00kPa

For Ramaniyam Realtors LL

Authorised Signator

* **Layer-2 (from 4.00m to 5.50m depth)**

Type of Strata	Silty Fine Sand
Colour	Greyish
Thickness of Layer	1.50m
SPT of the layer	15
Relative Density	Loose
Angle of Shearing Resistance, ϕ	31.50^0

For Ramaniyam Realtors LLP

Authorised Signatory

* **Layer-3 (from 5.50m to 9.00m depth)**

Type of Strata	Silty Fine Sand
Colour	Greyish
Thickness of Layer	3.50m
SPT of the layer	24
Relative Density	Medium Dense
Angle of Shearing Resistance, ϕ	34.20^0

* **Layer-4 (from 9.00m to 13.00m depth)**

Type of Strata	Silty Fine Sand
Colour	Greyish
Thickness of Layer	4.00m
SPT of the layer	41
Relative Density	Dense
Angle of Shearing Resistance, ϕ	38.975^0

* **Layer-5 (from 13.00m to 14.20m depth)**

Type of Strata	Weathered Rock
Colour	-
Thickness of Layer	1.20m
SPT of the layer	>100
Relative Density	Very Dense
Angle of Shearing Resistance, ϕ	42.50^0

Ground Water

Ground water table was encountered at a depth of 1.50m below the existing ground level during the last week of September 2023.

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

CHAPTER-4

FOUNDATION SYSTEM

4.0 Preamble

The foundation system design is an interface between super structure and the sub soil bearing strata characteristics. A sound foundation system should be safe against bearing strata shear response under the super structure load intensity. Similarly, the stability of the foundation system is governed by the bearing strata deformation response under the super structure load intensity. In addition, as a combined system of super structure and foundation, the overall stability is also governed by the super structure arrangement.

Considering the above aspects of foundation design, the suitable type of foundation system with respect to the sub soil conditions encountered at the borehole locations is presented in the subsequent sections.

4.1 Bearing Strata Characteristics

From field investigations, it can be observed that the sub-soil strata encountered at shallow depths are weak from both shear strength characteristics and deformation considerations and hence cannot be considered as bearing strata for proposed impending loads from structure.

However, the refusal soil strata (SPT>60) encountered below a maximum depth of 14.50m from existing ground level (Ref. BH-01) can be considered as good end bearing strata for proposed impending loads from structure.

Considering the above, suitable foundation system is presented below.

4.2. Foundation System

4.2.1 Deep Foundation System-15.00m long Bored Cast-in-Situ Friction cum End Bearing Piles

Considering the weak shear strength characteristics of sub-soil strata encountered at shallow depths, deep foundation system consisting of 15.00m long bored cast-in-situ Friction cum End Bearing Piles can be adopted.

Piles shall be drilled through DMC (direct mud circulation) technique.

For four different diameters, the safe load carrying capacities of 15.00m long bored cast-in-situ Friction cum End Bearing Piles are computed and presented below which can be adopted for foundation design purposes.

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

S. No	Type of Installation of Pile	Length of Pile below Existing Ground Level (m)	Type of Bearing Strata	Diameter of Pile (mm)	Safe Load Carrying Capacity (MT)	Safe Pull Out Capacity (MT)
1	Bored Cast-in-Situ	15.00	Weathered Rock	400	60	38
2				450	70	42
3				500	80	46
4				550	90	50

The computations of safe load carrying capacity for 400mm diameter and 15.00m long bored cast-in-situ Friction cum End Bearing pile are annexed to this report.

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

CHAPTER-5

CONCLUSIONS & RECOMMENDATIONS

1. Deep Foundation system presented in Clause 4.2.1, Chapter-IV can be adopted for foundation design purposes.
2. Suitable pile load tests (as per I.S: 2911, part-IV) shall be performed to confirm the presented **theoretical** safe load carrying capacities and arrive at the **allowable** load carrying capacity of piles under considerations. **(Mandatory).**
3. *Care shall be taken so that the ultimate end bearing soil strata are none other than recommended "Weathered Rock" type. The same shall be reaffirmed by our Geotechnical Engineer during foundation laying works are under progress*
4. Pile cap can be located over 0.30m thick well compacted ground replaced CNS (Cohesive Non-Swelling) soil surface.
5. Piles shall be installed using DMC (direct mud circulation) technique only.
6. Piles shall be grouped according to the column design load requirements.
7. Safe load carrying capacities of piles shall be limited to their structural capacities.

General

8. **CNS can be well graded coarse-grained soil like quarry dust or clean river sand or sand: gravels mix (1:2) or fly-ash that shall be well compacted to achieve the in-situ dry density more than 95% of the laboratory proctor maximum dry density at its optimum moisture content.**
9. As the chlorides and sulphates present in the collected water samples are within the permissible limits, no special steel or cement is recommended to be used for **open** foundation (if recommended) construction purposes.
10. **Water samples shall be extracted at different intervals up to deeper levels from an open well or dug-well and tested to determine the chemical**

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Sign

parameters as per the desired usages and also to understand the suitability to be used for deep foundation construction purposes.

For Geo Mines Engineers Pvt Ltd

Director

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

DESIGN OF PILE FOUNDATION (Refer:BH-01)

Refer, IS:2911(Part I/Sec 2)-1979, Reaffirmed 1997

1.0 Type of Installation of Pile — **Bored Cast in Situ**

1.1 Geometrical Data

Assumed Diameter of pile(D):	**400.0** mm
Assumed R.L of E.G.L:	0.000 m
Length of pile below E.G.L.(l) :	**15.000** m
R.L. of Bot. of Pile	-15.00 m

1.2 Design of Pile for Vertical Compression

1.2.1 Computation of Skin Resistance:

1.2.1.1

Layer-I

Type of Strata:	Silty Clay	
Average SPT of the strata,N:	4	
Bulk Density of the strata,γ:	14	kN/m^3
Undrained Cohesion, Cu:	26.67	kPa
R.L of top of Strata:	0.00	m
R.L of bottom of Strata:	-2.00	m
Average Thickness of Strata,I_c:	2.00	m
Effective overburden pressure over the top of strata,σ_{top}:	0.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	8.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	4.00	kN/m^2
Adhesion Factor, α:	1.00	
Negative Skin Resistance of the pile,q_s:	**-67.02**	**kN**
(q_s:α*Cu*pi()*d*Ic)		

1.2.1.2

Layer-II

Type of Strata:	Silty Clay	
Average SPT of the strata,N:	5	
Bulk Density of the strata,γ:	15	kN/m^3
Undrained Cohesion, Cu:	33.33333	kPa
R.L of top of Strata:	-2.00	m
R.L of bottom of Strata:	-4.00	m
Average Thickness of Strata,I_c:	2.00	m
Effective overburden pressure over the top of strata,σ_{top}:	8.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	18.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	13.00	kN/m^2
Adhesion Factor, α:	0.70	
Skin Resistance of the pile,q_s:	58.64	kN
(q_s:α*Cu*pi()*d*Ic)		

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

1.2.1.3 **Layer-III**

Type of Strata:	Silty Fine Sand	
Average SPT of the strata,N:	11	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	30.3	Deg.
R.L of top of Strata:	-4.00	m
R.L of bottom of Strata:	-5.50	m
Average Thickness of Strata,I_c:	1.50	m
Effective overburden pressure over the top of strata,σ_{top}:	18.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	25.50	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	21.75	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	23.96	kN

(q_s:σ*k*tanϕ*pi()*d*Ic)

1.2.1.4 **Layer-IV**

Type of Strata:	Silty Fine Sand	
Average SPT of the strata,N:	23	
Bulk Density of the strata,γ:	17	kN/m^3
Angle of Shearing Resistance,ϕ:	33.9	Deg.
R.L of top of Strata:	-5.50	m
R.L of bottom of Strata:	-10.00	m
Average Thickness of Strata,I_c:	4.50	m
Effective overburden pressure over the top of strata,σ_{top}:	25.50	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	57.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	41.25	kN/m^2
Coeff. Of Earth Pressure, k:	1.50	
Skin Resistance of the pile,q_s:	235.12	kN

(q_s:σ*k*tanϕ*pi()*d*Ic)

1.2.1.5 **Layer-V**

Type of Strata:	Silty Fine Sand	
Average SPT of the strata,N:	40	
Bulk Density of the strata,γ:	19	kN/m^3
Angle of Shearing Resistance,ϕ:	38.75	Deg.
R.L of top of Strata:	-10.00	m
R.L of bottom of Strata:	-14.50	m
Average Thickness of Strata,I_c:	4.50	m
Effective overburden pressure over the top of strata,σ_{top}:	57.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	97.50	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	77.25	kN/m^2
Coeff. Of Earth Pressure, k:	2.00	

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

Skin Resistance of the pile,q_s:	701.20	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		
Ultimate Skin Resistance,q_s:	**951.90**	**kN**

1.2.2 Computation of End Bearing Resistance:

Type of Bearing Strata	Weathered Rock	
Cross-Sectional Area of pile,Ap:	0.126	m^2
R.L of bottom of pile:	-15.00	
Minimum SPT-value of the Bearing Strata	60	
Angle of Shear Resistance, ϕ:	42.50	Deg.
Effective Overburden Pressure, q:	27.00	kPa
Bearing Capacity Factor(Nq)	240.00	
Ultimate End Bearing Resistance (Qp)	**814.3**	**kN**
(Qp=Ap*q*Nq)		

1.3.0	**Ultimate Load Carrying Capacity ($Qu=Qs+Q_p$)**	**1766.2**	**kN**
	Safe Load Carrying Capacity (Qsafe =Qu/2.5)	**706.5**	**kN**
	However, limit Q_{safe} to the structural capacity of pile:	**600.0**	**kN**

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

Depth of fixity of Pile

Length of Pile

L_1 = 0 cm

[since the pile cast at ground level with fixed head]

Characteristic strength of Concrete

f_{ck} = 30 N/mm^2

Diameter of Pile

D = 40 cm

Modulas of Elasticity of Concrete (E)

$5000 \times \sqrt{f_{ck}} = 5000 \times \sqrt{30}$ N/mm^2

[As per IS 456 :2000 pg. no : 16]

= 273861.28 Kg/cm^2

Moment of Inertia of Pile (I)

$\frac{\pi \times D^4}{64} = \frac{3.14 \times 40^4}{64}$ cm^4

= 125600.0 cm^4

K_2 (constant) = 48.800 Kg/cm^2

[As per IS : 2911 (Part 1 / Sec 1) - appendix-B]

R (constant) = $\sqrt[4]{\frac{(E \times I)}{K_2}}$

[As per IS : 2911 (Part 1 / Sec 1) - appendix-B, Cl.5.5.2]

= 162.94 cm

Hence L_1 / R

= $\frac{L_1}{R}$

[As per IS : 2911 (Part 1 / Sec 1) - appendix-B, Cl.5.5.2]

= 0.0E+00

For Ramaniyam Realtors LLP

Authorised Signatory

For Ramaniyam Realtors LLP

Authorised Signatory

432

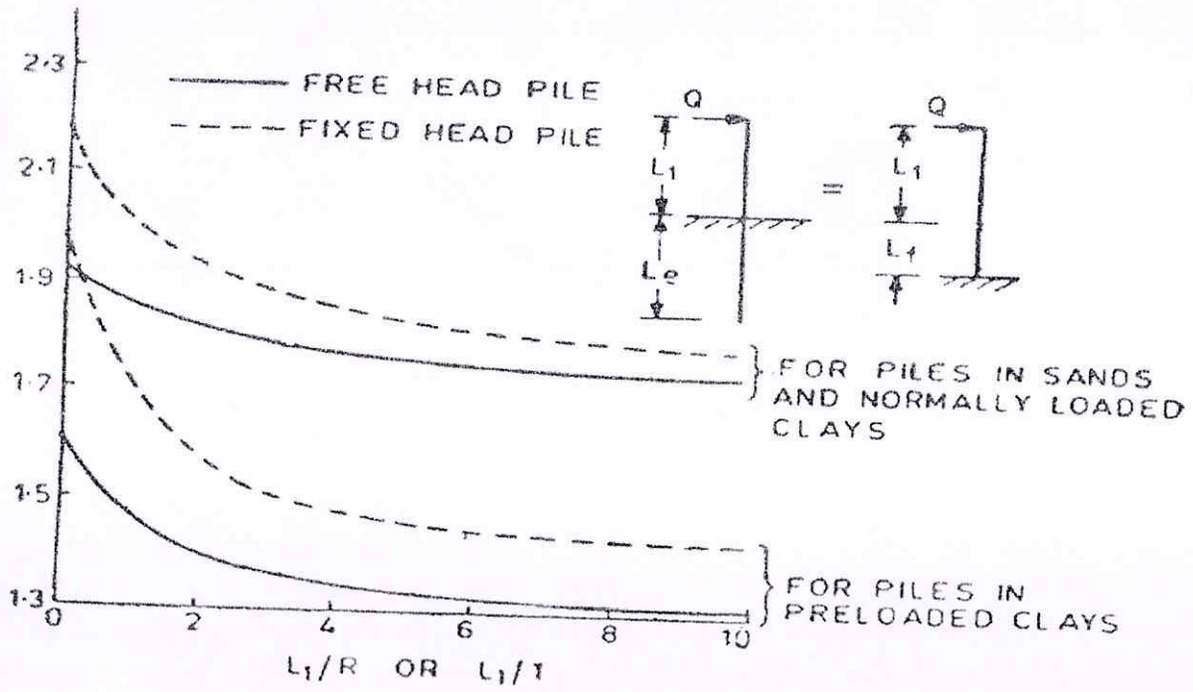


FIG. 2 DETERMINATION OF DEPTH FIXITY

For fixed head pile

$\frac{L_1}{R} = 2.2$ [As per IS : 2911 (Part 1 / Sec 1) - appendix-B, Cl.5.5.2 fig 2]

Length of fixity

L_f = 358.47 cm [As per IS : 2911 (Part 1 / Sec 1) -
= 3.58 m appendix-B, Cl.5.5.2]

Embedded Length

Le > 4 x R [As per IS : 2911 (Part 1 / Sec 1) -
> 6.5 m appendix-B, Cl.5.5.2]

For Ramaniyam Realtors LLP
Authorised Signatory

For Ramaniyam Realtors LLP
Authorised Signatory

433

Calculation of Lateral capacity of pile

(From IS:2911, Part 1 / Sec. 1, Cl.5.5.2 - Appendix A)

$$\text{Lateral capacity , } Q = \frac{12\,E\,I\,Y}{(L_1 + L_f)^3} \quad \text{for Fixed Head Pile}$$

Where ,

Y = Lateral deflection of pile = 10 mm (As per IS2911, part1 / sec.1)

Modulas of Elasticity of Concrete (E) = 273861.28 Kg/cm2

Moment of Inertia of Pile (I) = 125600.0 cm4

L1 + Lf = 0 + 557.39
= 358.5 cm
= 3.58 m

Safe Lateral Load Carrying Capacity

$$Q = \frac{12 \times 273861.28 \times 125600.0 \times 0.10}{358.5 \times 358.5 \times 3.58 \times 2.5}$$

= 3.6 MT

= 36 kN

S.No	Diameter of Pile (mm)	Depth of Fixity of Pile below Ground Level (m)	Safe Lateral Load Carrying Capacity (MT)
1	400	3.58	3.60
2	450	4.03	4.00
3	500	4.48	4.50
4	550	4.93	4.90

For Ramaniyam Realtors LLP
Authorised Signatory

For Ramaniyam Realtors LLP
Authorised Signatory

434



our services doesn't just end there

Buying & Selling Services

Property Buying Assistance, Property Selling Support, Market Price Analysis, Owner Outreach and Negotiation.

Legal & Documentation Services

Certified EC, Patta, legal opinions, property verification, due diligence, litigation solutions, and legal heir certificates.

Property Development & Approvals

Building plan approvals, construction, layout and sub-division approvals, zone conversion, and occupancy certification.

NRI & Investment Services

Escrow Services, Rentals, Litigation Solutions, Property Valuation and Property Management

Compliance & Special Services

Demolition, Vaasthu checks, regularization of unauthorized buildings, and office space solutions.



empowering your real estate decisions with smart tools

Property Valuation & Cost Estimation

Guideline Value, Apartment Composite Value, Stamp Duty & Registration Fees Calculator, Building Value Calculator, Capital Gains Calculator, Area Unit Converter, Length Unit Converter

Ownership, Compliance & Legal Verification

Encumbrance Certificate (EC) Search, Find Your SRO, Temple Property Check, WAQF Property Check, View Patta/Chitta, View FMB, Patta Analyzer, EC Analyzer

Zoning & Land Use Analysis

Land Use Zone Finder, CRZ Zone Check, Aquifer Zone Check, CBA Check, EWS Check, Road Width Check, Proposed Road Widening Check, FSI Calculator

Property Documentation & Workflow Tools

Forms & Templates, Document Generator, Document Translation, Dictionary

Vastu & Property Management Tools

Home Vastu Shastra, Plot Vastu Shastra, Property Management

Verified RealEstate™

We're honored to be part of your real estate journey

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996
www.verified.realestate