Verified RealEstate™

RE REGULATORY RECORD

RERA Document

The document as the regulator published it, reproduced in full behind this page.

Published for reference. The authority's own register is the operative record.

Verified RealEstate™
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India

hello@verified.realestate
+91 9996 12 9996
verified.realestate

FILE NO: LAYOUT-1 /0105/ 2023


உள்ளாட்சி மன்றப் படி

This Office D.DIS.No. 2551/2024/B3 Dt: 08.08.2024
Approved by Panchayat Union and forwarded to
Village Panchayat for Final Approval

Commissioner
Poonamallee Panchayat Union

அனுமதி வழங்கப்பட்டது
நாள் : 19/8/2024 முதல் 18/8/2032
ந.க.எண் : 004/2024
வேலாஞ்சேரி ஊராட்சி மன்றம்

தலைவர்
வேலாஞ்சேரி ஊராட்சி
பூவிருந்தவல்லி ஊராட்சி ஒன்றியம்

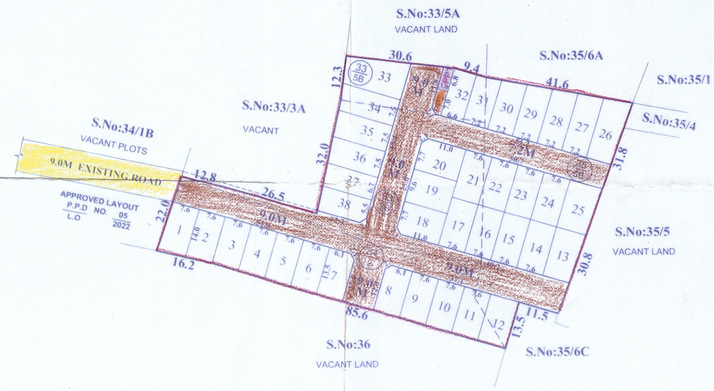

SITE EXTENT	(AS PER DOCUMENT)	:	5949 SQ.M
ROAD AREA		:	1907 SQ.M
PUBLIC PURPOSE PROVIDED (1%)		:	40 SQ.M
PP-1 HANDED OVER TO THE LOCAL BODY (0.5%) : 20.0 SQ.M PP-2 HANDED OVER TO THE TANGEDCO (0.5%) : 20.0 SQ.M			
NO. OF PLOTS		:	38 Nos

NOTE:
1. SPLAY - 1.5M x 1.5M
2. MEASUREMENTS ARE INDICATED EXCLUDING SPLAY DIMENSIONS
3. ROAD AREA
   PUBLIC PURPOSE-1
   PUBLIC PURPOSE-2 (RESERVED FOR TANGEDCO)
   — WERE HANDED OVER TO THE LOCAL BODY VIDE GIFT DEED DOC.NO:4792/2024, DATED:12.07.2024 @ SRO, POONAMALLEE.

CONDITIONS

(I)THE APPLICANT SHOULD FOLLOW THE CONDITIONS MENTIONED BY THE CE, PWD/WRD, CHENNAI REGION, CHEPAUK, CHENNAI-5 IN LETTER NO.DB/T5(3)/F- NOC7541 VAYALANALLUR A VILLAGE 0906 / 2024 / DATED.28.02.2024, WHICH ARE TO BE COMPLIED BY THE APPLICANT BEFORE ISSUING OF THE LAYOUT APPROVAL BY THE COMPETENT AUTHORITY (LOCAL BODY)

1. The applicants' land should be filled with earth filling with proper compaction to the minimum level of (+)24.120m (i.e.,) 1.02m above the crest level of the Weir in Vayalanallur Tank at (+)23.100m to protect the site from inundation during floods. The process of earth filling and compaction should be done in layers of not more than 0.30metre depth to achieve required degree of compaction for the depth from 0.96m to 1.06m depending upon the existing field levels. Also, the applicants should provide emergency pumping operation for the seepage water, if it is proposed to have basement floor and as well as dewatering arrangements during flood periods. The all-round pavement level within the site should not be less than (+)24.120m and the regular habitation should not be below MFL.
2. The applicants should clearly demarcate boundary of their land before commencement of any developmental activities in the presence of Revenue, Local body and WRD authorities concerned without fail and should not encroach the Government land in SF.No.298/7 & 8 and the same should be maintained as it is in the Revenue records.
3. The permission granted to the applicants, should not be altered / modified / changed to any others. Based on the records submitted by the applicants, the permission is granted. If any documents seem to be fake / manipulated/fabricated, in future the above permission will be cancelled without any correspondence. Hence, the applicants are solely responsible of genuinety of the documents submitted.
4. The WRD officers should be allowed to inspect the site at any time, during execution and thereafter, if necessary. Advance intimation should be given to the WRD officers concerned before commencement of work.
5. The applicants should abide by the rules and regulation of the WRD from time to time. The applicants should also abide court of law of both State & Central Government from time to time.
6. WRD is giving opinion only in connection with the inundation aspect and does not deliver any rights to the applicants to encroach the WRD/ Government Lands / river. The NOC for this site from the WRD is purely issued on the basis of inundation point of view.
7. The applicant should not object at any time for the maintenance works/ improvement works of the eri which are proposed to be carried out by WRD. The applicant should give an undertaking in writing to the effect that the above proposal will not obstruct in case any maintenance / improvement / development works as per Revenue records [FMB], which are proposed to be carried out by WRD in future periodically.
8. The applicants should not construct any cross masonry across/along the eri without prior permission of WRD. If any damages occurred to the Government eri, the same should be restored to its Original condition at their own cost.

Technical Suggestion:

a) The applicants should prepare the layout proposal by considering the suitable internal storm water drainage network drain as micro drains of suitable size within the site as per site condition, since there is patta channel running within the site. The same should be connected to the local drain / channel at his own cost, rainwater harvesting, roads with road side drain and sewerage treatment plant and its disposal and garbages / debris and other solid waste management as per norms in existence within the applicant's land according to existing rules in force and should get proper approval from competent authority without fail.

The sewage or any unhygienic drainage (Treated or Untreated) should not be let into drain/channel/ course at any cost and the debris and other materials should not be dumped into the drain / surplus course obstructing free flow of water. The applicants should make drainage network, at their own cost and the same is to be connected to natural storm water drainage / channel. There should not be any hindrance to the free flow of internal drain to downstream.

b) The necessary setback distance should be provided with in the site as per site condition as per the norms in existence and as per the rules in force of CMDA (as per the circular issued by the office of the Commissioner of Town & Country Planning, Chennai - 2 vide Roc. No. 4367/2019-BA2/Dated: 13.03.2019) during development and there should not be any construction activities in future also, the CMDA should issue completion certificate only after obtaining compliance certificate NOC from WRD

c) The applicants should get clearance certificate for this site from the Revenue department to make sure that the site is not an encroached property from the water body as well as confirming this proposed site boundaries.

d) The sewage water from the applicant land should not let into the drain and for the disposal of the sewage water, suitable arrangements should be made for the same by the applicants, and as well as the construction materials/debris/garbages should not be dumped into the channel/river/tank at any cost.

At any cost, sewage / sullage should not be let into channel/river, and the garbages, debris and construction materials should not be dumped into the channel/river restricting the free flow of water.

The owner of the document received from the applicants in respect to the ownership is purely of applicant's responsibility and it is only for reference purpose to this department. The legal validity of this document should be verified by the Development / Revenue authorities. The specific remarks on inundation are purely issued on technical grounds in respect to the physical location of land.

Failing to comply with any of the above conditions, WRD reserves rights to withdraw the Technical opinion on inundation point of view to the above proposed site and in event, the applicants shall not be eligible for any compensation whatsoever and as well as legal entity.

(II) TNCDBR-2019 RULE NO: 47 (8) IN G.O.(Ms) No.18, MAWS DEPARTMENT DATED 04.02.2019 & AMENDMENTS APPROVED IN G.O.Ms.No.16, MAWS (MAI) DEPARTMENT DATED 31.01.2020 AND PUBLISHED IN TNGG ISSUE No 41 DATED 31.01.2020

ONE PERCENT OF LAYOUT AREA EXCLUDING ROAD, ADDITIONALLY, SHALL BE RESERVED FOR "PUBLIC PURPOSE". WITHIN THE ABOVE CEILING 0.5% OF AREA SHALL BE TRANSFERRED TO THE LOCAL BODY AND 0.5% OF AREA SHALL BE TRANSFERRED TO THE TANGEDCO OR TO THE LOCAL BODY FREE OF COST THROUGH A REGISTERED GIFT DEED BEFORE THE ACTUAL SANCTION OF THE LAYOUT.

(III) TNCDBR-2019, RULE NO: 47 (11)

THE COST OF LAYING IMPROVEMENTS TO THE SYSTEMS IN RESPECT OF ROAD, WATER SUPPLY, SEWERAGE, DRAINAGE OR ELECTRIC POWER SUPPLY THAT MAY BE REQUIRED AS ASSESSED BY THE CONCERNED AUTHORITY, NAMELY, THE LOCAL BODY AND TAMIL NADU ELECTRICITY BOARD, SHALL BE BORNE BY THE APPLICANT.

(IV) LOCAL BODY SHOULD ENSURE COMPLIANCE OF ALL THE CONDITIONS STIPULATED BY PWD IN THEIR LETTER NO.DB / T5(3) /F- NOC7541 VAYALANALLUR - A VILLAGE0906 / 2024 / 28.02.2024 OBTAIN A LETTER FROM PWD CONFIRMING THE COMPLIANCE OF THE CONDITIONS BEFORE THE SANCTION AND RELEASE OF THE LAYOUT.

(V)THE APPLICANT IS RESPONSIBLE FOR THE SHAPE,SIZE & DIMENSIONS OF THE SITE UNDER REFERENCE.

◎ NECESSARY SPACE FOR BUILDING LINE TO BE LEFT AS PER THE RULE IN FORCE WHILE TAKING UP DEVELOPMENT IN EVERY PLOT.

NOTE:
THE RESPECTIVE OWNERS IN THE SITE UNDER REFERENCE SHALL NOT CAUSE ANY DISTURBANCE TO THE BRICK KILN IN THE NEAR BY LOCATION.

LEGEND:
- SITE BOUNDARY
- ROADS GIFTED TO LOCAL BODY
- EXISTING ROAD
- PUBLIC PURPOSE -1 GIFTED TO LOCAL BODY
- PUBLIC PURPOSE-2 GIFTED TO LOCAL BODY (FOR TANGEDCO)

For URBAN TREE PROPERTIES LLP

Partner / Authorised Signatory

OWNER SIGNATURE

CONDITIONS :
THE LAYOUT APPROVED IS VALID SUBJECT TO OBTAINING SANCTION FROM THE LOCAL BODY CONCERNED

This Planning Permission issued under New Rule TNCDBR, 2019 is subject to final outcome of the W.P.(MD) No.8048 of 2019 and WMP (MD) Nos. 6912 & 6913 of 2019.

I. ARIVAZHAKAN RAJ, D.C.E., B.Tech.,
Registered Engineer Grade-III
DTCP Registration No. TVLR/RE/Gr-III/2019/08/017
CMDA Registration No. RE/Gr-III/19/04/107
Off: SAI GREEN ASSOCIATES
238/5, Rohini Flats, J.N. Road,
Anna Nagar (W) Extn., Chennai-600 101.
Ph: 044 - 35746037, Mobile : 7299989915
LICENSED SURVEYOR

Planning Permit No. 15874 Dated: 23/07/2024
P.P.D L.O No: 157 2024
APPROVED
VIDE LETTER No.: Layout-1/0105/2023
DATED :
For Member Secretary
Chennai Metropolitan Development Authority
Chennai-600 008.

POONAMALLEE PANCHAYAT UNION

LAYOUT OF HOUSE SITES IN S.Nos.33/3B, 5B, 34/2 AND 35/6B OF VAYALANALLUR - A VILLAGE.

SCALE : 1:800 (ALL MEASUREMENTS ARE IN METRE.)

THE LANDLENS SUITE

Eight ways to know a piece of land before you pay for it.

This report covers one part of the picture. These cover the rest, drawn from the same government records, for any property in Tamil Nadu.

LandLens One
Ask anything about a property and get an answer grounded in live government records, with the sources shown.
/landlens/one

Verify My Land
Every record check run on one property and returned as a single report.
/landlens/verify-my-land

Legal Opinion
An advocate's written opinion on the title, built on the records we pull for it.
/landlens

One Map
Every layer on one map: the parcel, its boundary, zoning, water bodies and what sits around it.
/landlens/one/map

PriceMap
What land actually changed hands for around this plot, taken from the registered deeds.
/landlens/pricemap

Build Scope
What you are allowed to build here: floor space, height, coverage and setbacks.
/landlens/build-scope

Property Tracker
Watch a property and hear about it when something new is registered against it.
/landlens/property-tracker

Deal Room
Run the transaction in one place: documents, stamping, signatures and the parties.
/landlens/deal-room

FREE TOOLS · NO ACCOUNT NEEDED

Twenty-four checks you can run yourself, at no cost.

Records and verification

The registers themselves, read for you.

- Encumbrance Certificate
- Patta and Chitta
- Field Measurement Sketch
- EC Analyzer
- Bank charge check
- Court case search
- Seller background check
- Approval check by survey

Value and duty

What it is worth and what it costs to register.

- Guideline value by street
- Guideline value by survey
- Stamp duty and registration fees
- Capital gains
- Floor space index
- Area unit converter

Zoning and land use

What the plan says can happen on this land.

- Land use zone finder
- CMDA land use check
- Coastal regulation zone
- Master plan check
- Water bodies finder
- Airport height clearance

Registers and directories

Who holds it, and which office keeps the record.

- Find your registering office
- Temple property check
- Waqf property check
- RERA register

Every free tool
/tools

Services we run for you
/services

The LandLens suite
/landlens/one

Verified RealEstate™

Every claim in this document traces back to a government record.

- Legal opinions, due diligence and title verification
- Building plan, layout and sub-division approvals
- Completion and occupancy certificates, regularisation
- Escrow, negotiation and NRI property management
- Land survey, soil testing, architecture and construction

Verified RealEstate
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India
hello@verified.realestate
+91 9996 12 9996

Prepared from the registers named on the page each finding sits on. Where a register could not be read, this document says so in its place rather than leaving the gap to be read as a clean result.