Verified RealEstate™

Your trusted partner for buying, selling, and managing property, ensuring hassle-free service with 100% transparency.

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996

Official Property Record

Digitally Verified Record - Powered by Verified RealEstate™



REPORT

ON

SOIL INVESTIGATION FOR CONSTRUCTION OF RESIDENTIAL APARTMENT BUILDING AT LIC COLONY, KK NAGAR, TRICHY

Client

M/s. Jeyam Builders,
Pandian Salai (Near Orchard School),
LIC Colony, KK Nagar,
Trichy – 620 021.

By

Time

TIME INSTITUTE FOR MATERIALS TESTING
NO. 25, SANJEEVI NAGAR,
TRICHY - CHENNAI BYEPASS ROAD,
TIRUCHIRAPPALLI,
TAMIL NADU - 620 002.
PH: 0431 2401326

OCTOBER 2023

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIE
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

SUMMARY

Project	:	Construction of Residential Apartment Building at LIC Colony, KK Nagar, Trichy
Project Reference	:	Time /43/ Soil Test / October 2023
Owner	:	M/s. Jeyam Builders, Pandian Salai (Near Orchard School), LIC Colony, KK Nagar, Trichy – 620 021.
Type of Structure	:	R.C.C. Framed construction
Location	:	LIC Colony, KK Nagar, Trichy
Scope	:	Geotechnical investigation for the entire area of construction
Test conducted	:	Four explanatory bore hole up to 6m depth was made and conducted standard penetration tests at every 1.5m depth. The undisturbed soil samples were collected at every 1.5m depth for laboratory test.

FINDINGS

Soil at shallow depth	:	Red soil with gravels mixed exist up to 1.5m depth
Hard stratum	:	Soft rock exists between 2m to 6m depth in bore hole 2
Ground water table	:	Ground water table exists at 3m depth from ground level during soil investigation

For JEYAM BUILDERS

Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

CONTENTS

1. INTRODUCTION ON SOIL TEST

1.1 – Introduction - 1
1.2 – Investigation Programme, Procedure and Data - 2
1.3 – Review of Field and Laboratory Results - 3
1.4 – Recommended Safe bearing capacity values - 5
1.5 – Conclusions - 6

2. SOIL PROFILES

2.1 – Plan of Bore Hole 1 to 4 - 7
2.2 – Bore log details for Bore Hole 1 to 4 - 8
2.5 – Summary of Engineering Geo Properties for Bore hole 1 to 4 - 12
2.6 – Summary of Laboratory test results for Bore Hole 1 to 4 - 16
2.7 – Shear Parameters for different layers of Bore Hole 1 to 4 - 17

3. SIEVE ANALYSIS REPORT

3.1 – Sieve Analysis report of sample from Borehole No 1 to 4 - 18

4. CALCULATION OF SAFE BEARING CAPACITY OF THE SOIL

4.1 – Safe bearing capacity calculation based on settlement and Shear - 21
4.2 – Safe Bearing capacity of soil based on SPT values - 27
4.3 – Safe Bearing capacity of soil based on Shear Failure Criteria Through Direct Shear test - 28
4.4 – Comparison of safe bearing capacity of soil Through shear and settlement - 30

5. RESULT

5.1 – Recommended safe bearing capacity values at different depths - 31

6. SOIL & ROCK SAMPLE PHOTOS

7. SITE PHOTOS

ANNEXURE

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

SOIL INVESTIGATION

American Global Standards
AIAO-BAR
ACCREDITED
ISO - 17025:2017

B.N. Krishnaswami, M.E., (Struct Engg.,) Ph.D.,
Former Faculty, NIT, Trichy

Time Institute for Materials Testing
टाइम इन्स्टिट्यूट चीज़े शोध केलिए

Soil & Structural Consultant, Construction Materials Testing Lab

Quality is Excellence

October 25, 2023

To

M/s. Jeyam Builders,
Pandian Salai (Near Orchard School),
LIC Colony, KK Nagar,
Trichy – 620 021.

REPORT ON SOIL INVESTIGATION

(Ref: TIME/43/ SOIL TEST/ OCTOBER 2023)

Sub: Soil Investigation for construction of Residential Apartment Building at LIC Colony, KK Nagar, Trichy – reg.,

Ref: Based on letter dated: 20.10.2023

1.1 Introduction:

It is proposed to construct a **Residential Apartment Building at LIC Colony, KK Nagar, Trichy.** A detailed soil investigation was suggested for estimating the safe bearing capacity of the soil, so that suitable type of foundation can be decided for the proposed structure. Time Institute for Materials Testing (TIME) has been requested to undertake the soil investigation at the proposed site. The study was carried out by TIME between **21.10.2023 & 22.10.2023.** This report presents complete investigation data and discusses the results to recommend the bearing capacity values at different depths for the proposed structure.

Section 2 describes the soil profile and bore log details of four exploratory bore holes. Section 3 of this report gives the Grain size distribution curves and its analysis. Section 4 of this report presents the calculated safe Bearing capacity values of soil at various depths. Section 5 of this report reviews the test results and the recommended safe bearing capacity values for design of foundation. Section 6 of this report presents the Soil & Rock sample photos. Section 7 of this report presents site photo.

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

25, Sanjeevi Nagar, Vinni Gardens, Trichy - Chennai Bye Pass Road, Trichy - 620 002. Tel: + 91 431 2401326,
Mob : + 91 94433 27936 Email : tmaterialstesting@yahoo.co.in, tmaterialstesting1@gmail.com Web: www.timeinstitute.net

1.2 Investigation Programme, Procedure and Data:

Investigation was carried out in four location at the site through exploratory bore holes. Soil samples were collected from bore hole at different depths for conducting laboratory test. Standard Penetration test was conducted at regular intervals and 'N' values were recorded. Undisturbed soil samples were collected and were preserved and transported to the laboratory for detailed identification tests. Based on the field and laboratory tests on the samples collected, the results are furnished in this report.

An exploratory bore hole was advanced from the existing ground level using truck mounted rotary drilling techniques supplemented by Betonies mud circulation. This drilling procedure with mud circulation is found most suitable for making exploratory bore hole. The mud circulation was employed through the drill rods and letting it out though the side jets provided in the cutting tool thus preventing any disturbance at the bore hole bottom. Mud circulation was used to stabilize the sides and the bottom of the bore hole, and then to bring the soil cuts to the surface. It is important to note that the mud jet is not used to cut the soils as in the case of wash boring technique. Use of drilling mud will also help in preventing the disturbance to the soil at the bore hole bottom during drilling operations. Diameter of the bore hole is about 150mm.

Bore hole was always kept full with the drilling mud so that a positive head is maintained in the bore hole thus preventing any disturbance to the soil within the test zone.

The field tests included Standard penetration test, Disturbed and undisturbed soil sampling, identification of different soil layers, Ground water table observation, complete logging of the bore hole, etc.

Laboratory investigation consisted of classification tests like grain size distribution analysis, determination of specific gravity etc. Unconfined Compression test and Direct shear was conducted on preserved soil samples. All the field and laboratory tests were conducted according to the procedures stipulated in relevant IS codes.

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

1.3 Review of Field and Laboratory Results:

Sub soil Profile

The original ground level in the presently investigated area was plain terrain.

Bore Hole 1:

The soil below the existing ground level is red soil. This layer is extended up to 0.8m depth. Red soil with gravels mixed exists from 0.8m to 1.5m depth. Gravels exist from 1.5m to 5m depth. Below which disintegrated rock particles exists from 5m to 6m depth from the existing ground level. The soil stratification and its variation under present investigation are available in bore log details. The 'N' value is progressively increasing towards depth, due to the soil stratification.

Bore Hole 2:

The soil below the existing ground level is red soil. This layer is extended up to 0.4m depth. Red soil with gravels mixed exists from 0.4m to 1m depth. Gravels with disintegrated rock particles mixed exist from 1m to 2m depth. Below which soft rock exists from 2m to 6m depth from the existing ground level. The soil stratification and its variation under present investigation are available in bore log details. The 'N' value is progressively increasing towards depth, due to the soil stratification.

Bore Hole 3:

The soil below the existing ground level is red soil. This layer is extended up to 0.8m depth. Red soil with gravels mixed exists from 0.8m to 3.5m depth. Gravels with disintegrated rock particles mixed exist from 3.5m to 5m depth. Below which weathered rock exists from 5m to 6m depth from the existing ground level. The soil stratification and its variation under present investigation are available in bore log details. The 'N' value is progressively increasing towards depth, due to the soil stratification.

Bore Hole 4:

The soil below the existing ground level is filled up soil. This layer is extended up to 0.3m depth. Red soil exists from 0.3m to 1m depth. Red soil with gravels mixed exists from 1m to 1.5m depth. Gravels exist from 1.5m to 3m depth. Gravels with disintegrated rock particles mixed exist from 3m to 3.8m depth. Below which weathered rock exists from 3.8m to 6m depth from the existing ground level. The soil stratification and its variation under present investigation are available in bore log details. The 'N' value is progressively increasing towards depth, due to the soil stratification.

For JEYAM BUILDERS

Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

Ground Water Table

Ground water table exists at 3m depth from the ground level during the soil investigation.

Shear Strength

Standard Penetration test blow counts 'N' is measured at different levels in the bore hole. Mainly these 'N' values are used to assess the shear strength of different soil layers.

Cohesive layers: The classification of 'N' values in moderate to high plasticity medium clay deposits developed by Terzaghi is used for estimating the unconfined compression strength and untrained shear strength of clay and sandy clay layers. The consistency between the N values and the liquidity index values is reviewed while assigning undrained shear strength for soft to medium clay layers.

Non - Cohesive Layers: The sand layers towards depth are of residual type and suitable modifications are made to take care of the presence of plastic fines in the residual soil. Conventional method of estimating the angle of shearing resistance ϕ corresponding to the relative density and the grain size distribution as per the classification suggested by Peck and suitably modified by the R.K. Hough to account for the influence of grain size distribution is adopted here.

Laboratory Tests:

The Collected soil samples were tested as per relevant procedure in IS codes. The following parameters are evaluated.

1) **Natural Moisture Content**: This test is conducted in all disturbed samples to find the water content in soil samples as per **IS 2720 (Part 2): 1973**
2) **Specific Gravity:** This test is conducted in all disturbed soil samples to find specific gravity of soil as per **IS 2720 (Part 3): 1980**
3) **Density:** This test is conducted in all disturbed soil samples to find Bulk density and Dry density of soil as per **IS 2720 (Part 8): 1983**
4) **Sieve Analysis: This test is conducted to identify and classify the samples** as per **IS 2720 (Part 4) : 1985**
5) **Direct Shear Test:** This test conducted in coarse grained soil to find the angle of shearing resistance of the soil as per **IS 2720 (Part 13):1986**

For JEYAM BUILDERS

Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

1.4 Recommended Safe bearing capacity values at different depths

Bore Hole	Depth (m)	Safe Bearing Capacity (t/m^2)
BH – 1	1.50	11.04
	3.00	22.94
	4.50	39.93
	6.00	41.63
BH – 2	1.50	31.43
	3.00	42.48
	4.50	43.33
	6.00	44.18
BH – 3	1.50	11.04
	3.00	20.39
	4.50	39.93
	6.00	40.78
BH – 4	1.50	33.98
	3.00	39.08
	4.50	41.63
	6.00	42.48

For JEYAM BUILDERS

Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

1.5 Conclusions:

The scope of foundation is purely the decision of the structural engineer. However, the following suggestion are furnished for your reference.

1. There are two types of foundation as Open foundation and Deeper foundation.
2. Under Open foundation, there are four types like Isolated, Combined, Raft and Mat Foundation.
3. Under Deeper foundation, it is only Pile foundation.
4. Under which condition we can prefer Open foundation or Pile foundation?
5. In general, to have Open foundation for any type of loading via Light load /Heavy load, symmetrically spaced columns or unsymmetrically spaced columns, it is preferable to have SBC as 20t/m^2 and above at 3m depth and it should continue to increase as proceed down, further it should not increase and decrease after 3m depth to satisfy the settlement criteria.
6. Based on the existing soil condition in this location the above condition to provide open foundation is fully satisfied.
7. **Hence it is Suggested to provide Open foundation at 3m depth by considering SBC values as 30t/m^2.**
8. The minimum width of footing should be maintained as 1.2m x 1.2m to avoid Punching Shear failure and the footing should rest on natural undisturbed soil strata.
9. The Excavated material can be reused for Backfilling since the Bulk density and Permeability values are well within the Permissible limits.

For Time Institute for Materials Testing

for S.S.K

25th October 2023


Dr. B.N. Krishnaswami.

For JEYAM BUILDERS

Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

SITE LOCATION PLAN

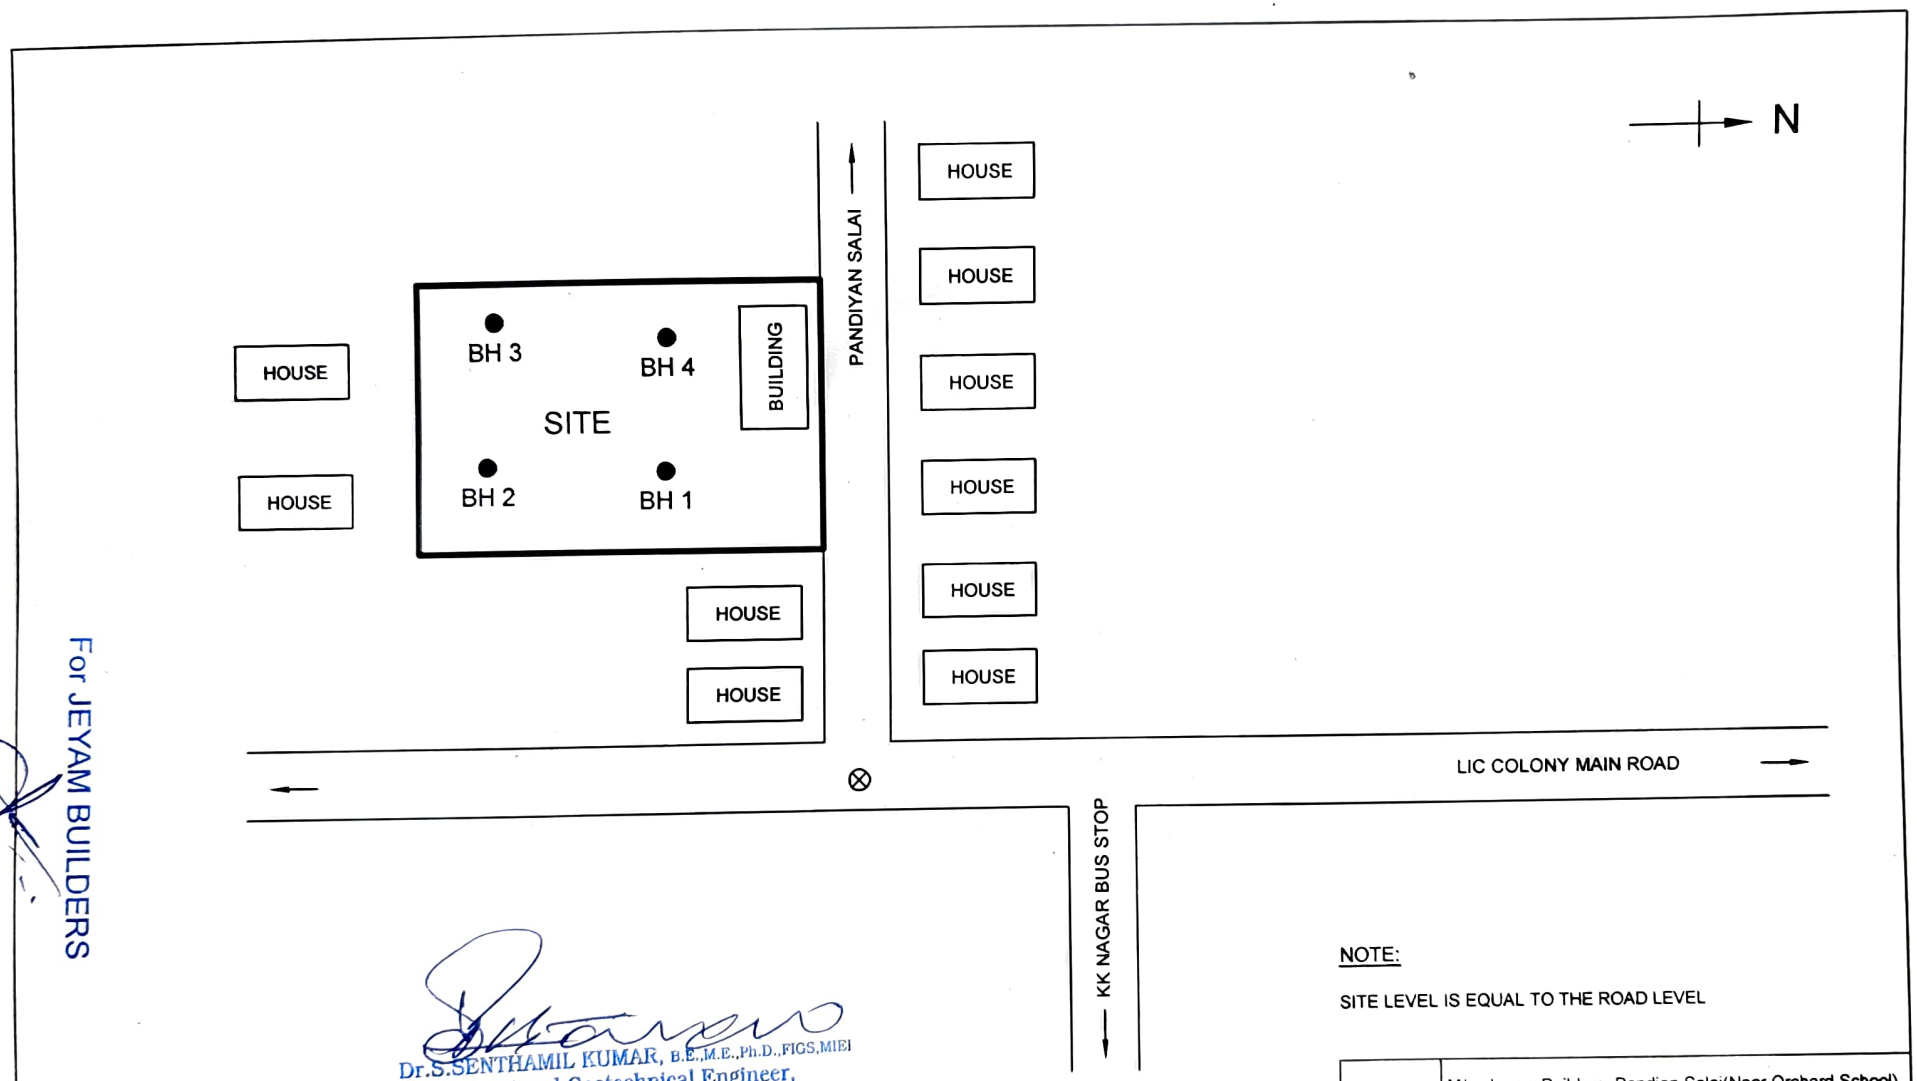

For JEYAM BUILDERS

Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

LEGEND:

● BORE LOG LOCATION

⊗ SITE LOCATION

SITE PLAN

NOTE:

SITE LEVEL IS EQUAL TO THE ROAD LEVEL


CLIENT	M/s. Jeyam Builders, Pandian Salai(Near Orchard School), LIC Colony, KK Nagar, Trichy – 620 021.		
SOIL CONSULTANT	TIME Institute for Materials Testing No 25, Sanjeevi Nagar, Trichy - Chennai Byepass road , Trichy - 620002. PHONE : 0431 - 2401326(OFF)		
DATE OF SURVEY	21.10.2023 & 22.10.2023	TITLE PLAN OF BORE HOLE AND SITE DETAILS AT LIC COLONY, KK NAGAR, TRICHY	
SCALE	NTS	DRG.NO DRAWING - 01	REV

BORE LOG DETAILS

2.2 BORE LOG DETAILS FOR BORE HOLE 1

Project : Report on soil investigation for Construction of Residential Apartment Building
Location : LIC Colony, KK Nagar, Trichy
Started on : 21.10.2023 **Ended on** : 21.10.2023
Depth of G.W.T : 3m
Type of Boring : Calyx drilling
Site Level : Equal to the road level

Lithology of Bore Hole			SPT Data					Graphical representation of penetration Resistance ('N' Value)
Depth below G.L. (m)	Profile	Soil Description	Depth of SPT (m)	0-15cm	15-30cm	30-45cm	N Value	0 20 40 60
0 - 0.8m		Red soil						
0.8m - 1.5m		Red soil with gravels mixed	1.5	4	6	10	16	
1.5m - 5m		Gravels	3.0	7	15	15	30	
			4.5	Rebound			50	
5m - 6m		Disntegrated rock Particles	6.0	Rebound			52	

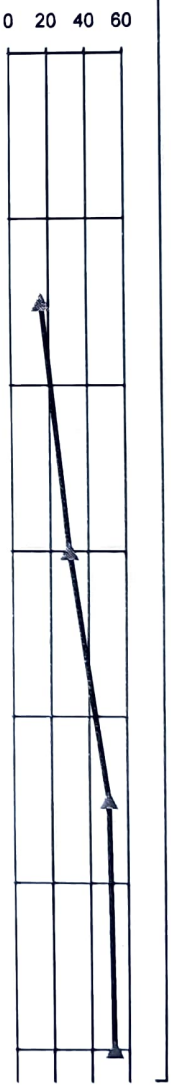

Bore terminated at 6m depth from the existing ground level

For JEYAM BUILDERS

Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

2.3 BORE LOG DETAILS FOR BORE HOLE 2

Project : Report on soil investigation for Construction of Residential Apartment Building
Location : LIC Colony, KK Nagar, Trichy
Started on : 21.10.2023 **Ended on** : 21.10.2023
Depth of G.W.T : 3m
Type of Boring : Calyx drilling
Site Level : Equal to the road level

Lithology of Bore Hole			SPT Data					Graphical representation of penetration Resistance ('N' Value)
Depth below G.L. (m)	Profile	Soil Description	Depth of SPT (m)	0-15cm	15-30cm	30-45cm	N Value	0 20 40 60
0 - 0.4m		Red soil						
0.4m - 1m		Red soil with gravels mixed						
1m - 2m		Gravels with disintegrated rock particles mixed	1.5	14	18	22	40	
2m - 6m		Soft rock	3.0	Rebound			53	
			4.5	Rebound			54	
			6.0	Rebound			55	

Bore terminated at 6m depth from the existing ground level


For JEYAM BUILDERS
Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

2.4 BORE LOG DETAILS FOR BORE HOLE 3

Project : Report on soil investigation for Construction of Residential Apartment Building
Location : LIC Colony, KK Nagar, Trichy
Started on : 22.10.2023 **Ended on** : 22.10.2023
Depth of G.W.T : 3m
Type of Boring : Calyx drilling
Site Level : Equal to the road level

Lithology of Bore Hole			SPT Data					Graphical representation of penetration Resistance ('N' Value)
Depth below G.L. (m)	Profile	Soil Description	Depth of SPT (m)	0-15cm	15-30cm	30-45cm	N Value	0 20 40 60
0 - 0.8m		Red soil						
0.8m - 3.5m		Red soil with gravels mixed	1.5	7	8	8	16	
			3.0	9	13	14	27	
3.5m - 5m		Gravels with disintegrated rock particles mixed	4.5	Rebound			50	
5m - 6m		Weathered rock	6.0	Rebound			51	

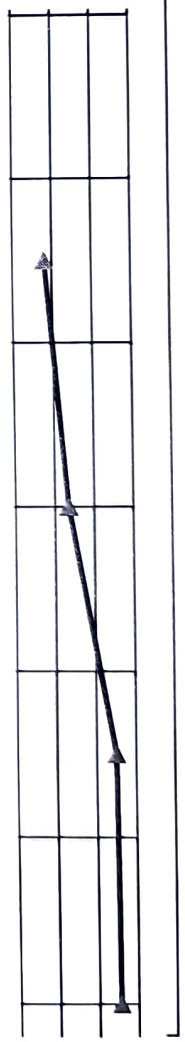

Bore terminated at 6m depth from the existing ground level

For JEYAM BUILDERS


Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

2.5 BORE LOG DETAILS FOR BORE HOLE 4

Project : Report on soil investigation for Construction of Residential Apartment Building
Location : LIC Colony, KK Nagar, Trichy
Started on : 22.10.2023 **Ended on** : 22.10.2023
Depth of G.W.T : 3m
Type of Boring : Calyx drilling
Site Level : Equal to the road level

Lithology of Bore Hole			SPT Data					Graphical representation of penetration Resistance ('N' Value)
Depth below G.L. (m)	Profile	Soil Description	Depth of SPT (m)	0-15cm	15-30cm	30-45cm	N Value	0 20 40 60
0 - 0.3m		Filled up soil						
0.3m - 1m		Red soil						
1m - 1.5m		Red soil with gravels mixed	1.5	8	19	24	43	
1.5m - 3m		Gravels	3.0	21	23	26	49	
3m - 3.8m		Gravels with disintegrated rock particles mixed						
3.8m - 6m		Weathered rock	4.5	Rebound			52	
			6.0	Rebound			53	

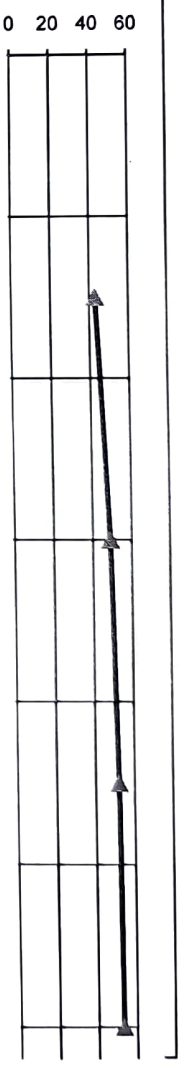

Bore terminated at 6m depth from the existing ground level

For JEYAM BUILDERS

Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

2.6 Summary of Engineering Geo Properties

Natural Moisture Content:

The natural water content also called the natural moisture content is the ratio of the weight of water to the weight of the solids in a given mass of soil. This ratio is usually expressed as percentage.

$$W = [(W2-W3)/(W3-W1)] \times 100$$

Where,

W_1 = Weight of container gm

W_2 = Weight of container +wet soil gm

W_3 = Weight of container +dry soil

Bulk Density:

The total, or wet, density of soil, $_t$, is the ratio of the total mass of soil to its total volume and can be defined as follows:

$$\gamma_{bulk} = M / V$$

Where

M_t = Total Mass of soil

V_t = Total Volume

Dry Density:

The soil dry density, $_b$, is the ratio of the mass of the solid phase of the soil (i.e., dried soil) to its total volume (solid and pore volumes together) and is defined as follows:

$$\gamma_{dry} = M_b / V_b$$

Where

M_b = Total Mass of dried soil

V_b = Total Volume

For JEYAM BUILDERS

Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

Specific gravity:

Specific gravity is the ratio of the weight of a given volumeof a material at a standard temperature to the weight of an equal volume of distilled water at the same stated temperature.

The specific gravity G of the soil = $(W_2 - W_1) / [(W_4 - W_1)-(W_3-W_2)]$

Where

W_1 = Weight of density bottle
W_2 = Weight of density bottle + dry soil
W_3 = Weight of bottle + dry soil + water at temperature
W_4 = Weight of density bottle + Water

Void Ratio:

Soil void ratio (e) is the ratio of the volume of voids to the volume of solids:

$$e = (Vv) / (Vs)$$

Where
Vv is the volume of the voids (empty or filled with fluid),
Vs is the volume of solids.

Porosity:

Soil porosity (η) , which is defined as the ratio of the volume of voids to the total volume of the soil. The porosity and the void ratio are inter-related as follows:

$$\eta = (1 - (\gamma_d/G_s))*100$$

$$e = \eta/(1-\eta) \;\&\; \eta = e / (1+e)$$

Where
γ_d = Dry Density
G_s = Specific gravity

For JEYAM BUILDERS

Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

Summary of Engineering Geo Properties for Bore Holes 1 & 2

Bore hole No.	Depth (m)	Soil Description	Natural Moisture Content (%)	Bulk Density (gm/cc)	Dry Density (gm/cc)	Specific gravity	Porosity (%)	Void Ratio
Bore Hole 1	1.5	Red soil with gravels mixed	13.28	1.95	1.72	2.65	35	0.54
	3.0	Gravels	9.70	1.98	1.80	2.66	32	0.47
	4.5		8.90	2.00	1.84	2.66	31	0.45
	6.0	Disintegrated rock particles	7.12	2.04	1.90	2.66	28	0.40
Bore Hole 2	1.5	Gravels with disintegrated rock particles mixed	8.39	2.03	1.87	2.66	30	0.42
	3.0	Soft rock	4.39	2.07	1.98	2.68	26	0.35
	4.5		4.10	2.08	2.00	2.68	25	0.34
	6.0		3.95	2.09	2.01	2.68	25	0.33

For JEYAM BUILDERS
Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,MGS,MISTE
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

Summary of Engineering Geo Properties for Bore Holes 3 & 4

Bore hole No.	Depth (m)	Soil Description	Natural Moisture Content (%)	Bulk Density (gm/cc)	Dry Density (gm/cc)	Specific gravity	Porosity (%)	Void Ratio
Bore Hole 3	1.5	Red soil with gravels mixed	13.51	1.94	1.71	2.65	36	0.55
	3.0		12.95	1.96	1.74	2.65	35	0.53
	4.5	Gravels with disintegrated rock particles mixed	8.23	2.03	1.88	2.66	29	0.42
	6.0	Weathered rock	5.60	2.06	1.95	2.68	27	0.37
Bore Hole 4	1.5	Red soil with gravels mixed	12.25	1.97	1.76	2.65	34	0.51
	3.0	Gravels	9.10	1.99	1.82	2.66	31	0.46
	4.5	Weathered rock	5.45	2.04	1.93	2.68	28	0.39
	6.0		5.20	2.05	1.95	2.68	27	0.38

For JEYAM BUILDERS

Managing Partner

Dr. SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

2.6 Summary of Laboratory Test Results for Bore Holes 1, 3 & 4

Bore hole No.	Depth (m)	Soil Description	Gravel (%)	Coarse sand (%)	Medium Sand (%)	Fine sand (%)	Silt (%)	Clay (%)
Bore Hole 1	1.5	Red soil with gravels mixed	19.8	16.3	33.5	21.8	7.2	1.4
	3.0	Gravels	61.3	26.1	10.5	2.1	0.0	0.0
	4.5		63.1	27.2	8.0	1.7	0.0	0.0
Bore Hole 3	1.5	Red soil with gravels mixed	16.9	16.4	31.1	25.8	6.8	3.0
	3.0		18.2	17.5	32.9	23.6	6.1	1.7
Bore Hole 4	1.5	Red soil with gravels mixed	17.6	18.4	30.3	25.1	6.2	2.4
	3.0	Gravels	62.6	27.5	7.6	2.3	0.0	0.0

For JEYAM BUILDERS
Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,MIG,MISTE
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

2.7 Shear Strength Parameters for Different layers of Bore Holes 1 to 4

Bore Hole No.	Depth below G.L. (m)	Soil Description	N	Shear Strength 'Ø' (in degrees)
Bore Hole 1	1.5	Red soil with gravels mixed	16	30.39
	3.0	Gravels	30	32.31
	4.5		50	36.14
	6.0	Disintegrated rock particles	52	36.57
Bore Hole 2	1.5	Gravels with disintegrated rock particles mixed	40	35.92
	3.0	Soft rock	53	37.20
	4.5		54	37.41
	6.0		55	37.61
Bore Hole 3	1.5	Red soil with gravels mixed	16	30.64
	3.0		27	31.84
	4.5	Gravels with disintegrated rock particles mixed	50	36.35
	6.0	Weathered rock	51	36.57
Bore Hole 4	1.5	Red soil with gravels mixed	43	36.14
	3.0	Gravels	49	36.35
	4.5	Weathered rock	52	36.99
	6.0		53	37.20

For JEYAM BUILDERS

Managing Partner


Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

GRAIN SIZE ANALYSIS

3.1 TEST REPORT ON SIEVE ANALYSIS OF SAMPLE

Bore Hole – 1 @ 1.5m to 4.5m

SIEVE SIZE	PERCENTAGE OF PASSING		
	1.5m Depth	3m Depth	4.5m Depth
10 mm	100	100	100
4.75 mm	80.2	38.7	36.9
2.36 mm	74	24.9	23
1.18 mm	63.9	12.6	9.7
600 micron	47.9	6.4	5
300 micron	30.4	2.1	1.7
150 micron	18.1	0	0
75 micron	8.6	0	0

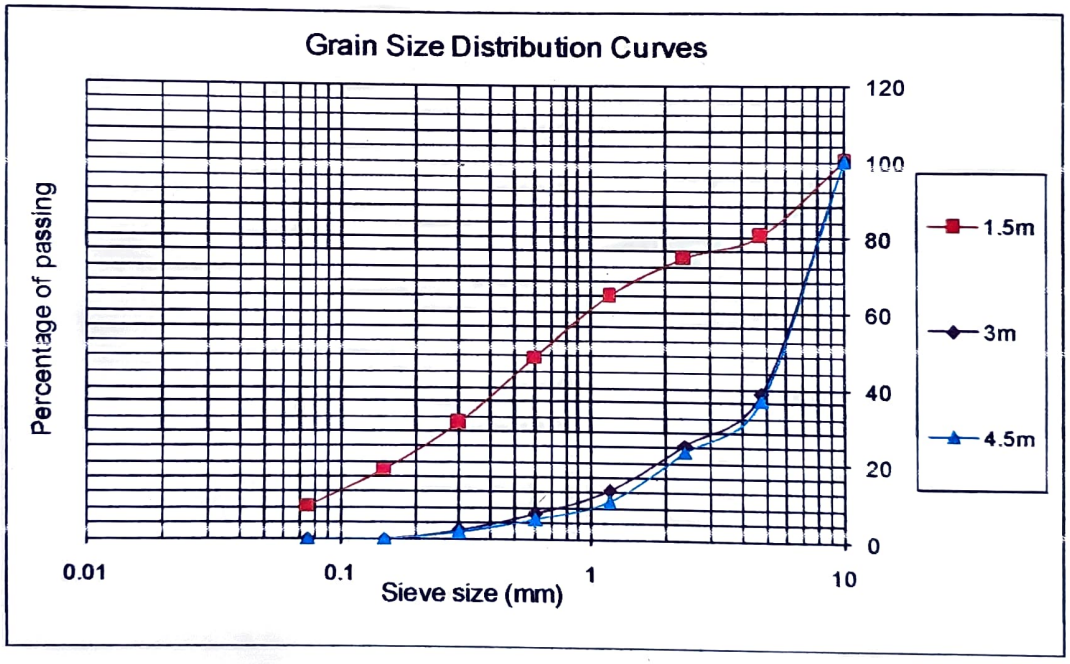

Description	1.5m Depth	3m Depth	4.5m Depth
Fineness modulus	2.769	5.153	5.237

Observation:

The inference from the graph shows that the sand with gravels mixed exist at 1.5m depth and gravels exists up to 4.5m depth.

For JEYAM BUILDERS


Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

3.2 TEST REPORT ON SIEVE ANALYSIS OF SAMPLE

Bore Hole – 3 @ 1.5m & 3m

SIEVE SIZE	PERCENTAGE OF PASSING	
	1.5m Depth	3m Depth
10 mm	100	100
4.75 mm	83.1	81.8
2.36 mm	75.6	73.7
1.18 mm	66.7	64.3
600 micron	54.1	51.1
300 micron	35.6	31.4
150 micron	21	17.9
75 micron	9.8	7.8

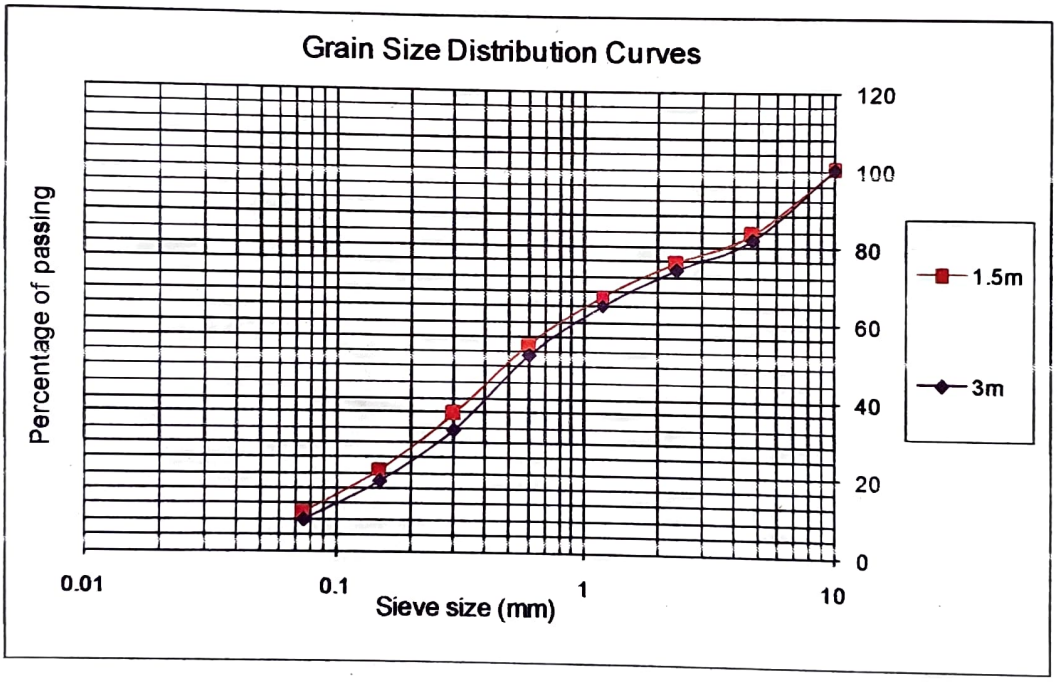

Description	1.5m Depth	3m Depth
Fineness modulus	2.541	2.720

Observation:

The inference from the graph shows that the sand with gravels mixed exist up to 3m depth.

For JEYAM BUILDERS


Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

3.3 TEST REPORT ON SIEVE ANALYSIS OF SAMPLE

Bore Hole – 4 @ 1.5m & 3m

SIEVE SIZE	PERCENTAGE OF PASSING	
	1.5m Depth	3m Depth
10 mm	100	100
4.75 mm	82.4	37.4
2.36 mm	73.8	23.1
1.18 mm	64	9.9
600 micron	50.7	5.4
300 micron	33.7	2.3
150 micron	19.1	0
75 micron	8.6	0

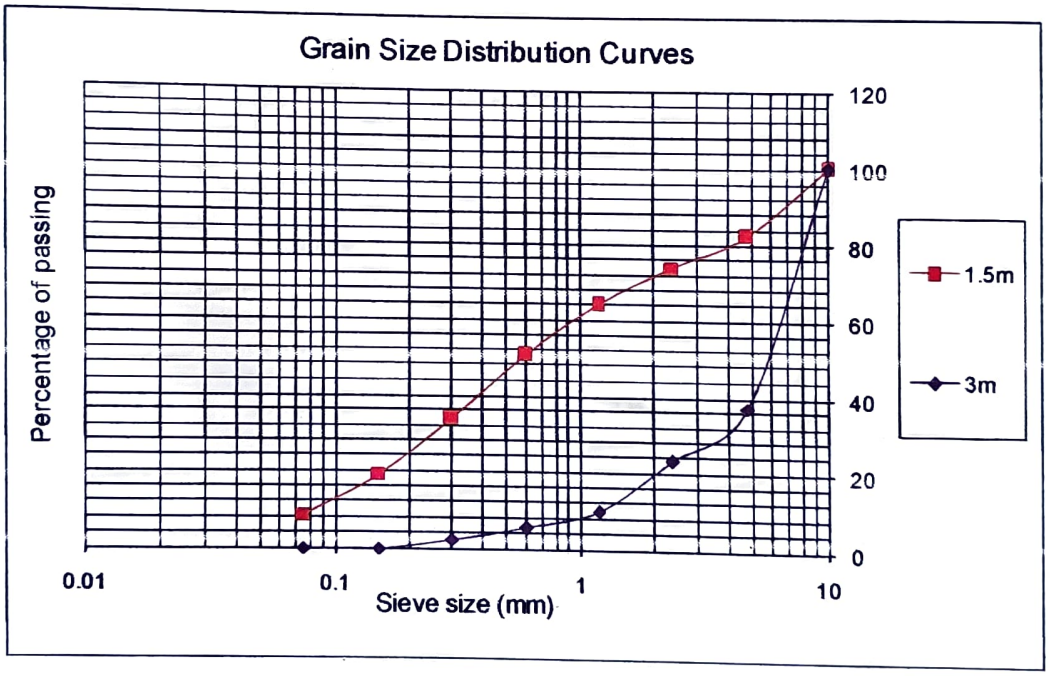

Description	1.5m Depth	3m Depth
Fineness modulus	2.677	5.219

Observation:

The inference from the graph shows that the sand with gravels mixed exist at 1.5m depth and gravels exists at 3m depth.

For JEYAM BUILDERS

Managing Partner

Dr.S.SANTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

CALCULATION
OF
SAFE BEARING CAPACITY

4. CALCULATION OF SAFE BEARING CAPACITY

4.1 Safe bearing capacity calculation based on settlement and Shear

Safe Bearing Capacity calculations based on settlement consideration (SPT value):

Safe Bearing Capacity calculations for shallow foundation will vary based on the width of foundation.

For example, in the case of Individual footing such as isolated, combined etc., we are supposed to use the formula as mentioned below. (Using Teng's Modified formula)

$$q_{na} = 51.4 \times (N-3) \times \left(\frac{B+0.3}{2B}\right)^2 \times R_w \times C_d$$

Where,

q_{na}	=	Net safe bearing capacity of soil (kN/m^2) (for 2.5cm permissible settlement as per Terzhagi and Peck)
N	=	Corrected SPT values
B	=	Width of foundation (m) (let us assume 2m)
R_w	=	Correction factor for water table level
C_d	=	Correction factor for depth of embedment

For Bore Hole 1 @ 3m depth SPT 'N' Value = 30

$\Rightarrow$ **$q_{na} = 51.4 \times (30-3) \times ((2+0.3)/(2 \times 2))^2 \times 0.5 \times 1 = 229.42$ kN/m^2**

$\therefore$ **$q_{na} = 22.94$ t/m^2**

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

Safe Bearing Capacity calculations based on shear consideration (Direct Shear):

As Per IS 6403:1981

At 3m depth (Bore Hole 1)

Proving Ring capacity 200kg = 966.2 division

Area of the shear box = 6cm x 6cm = 36cm^2

Normal Stress (kg/cm^2)	No. of Division	Stress
0.5	23	0.132
1.0	78	0.448
1.5	133	0.765

Stress = Load / Area

= (200/966.2) * 23* (1/36) = 0.132

Ø = $\tan^{-1}$ (0.765-0.132) = 32.31°

Net safe bearing capacity of the soil (for general shear failure as per IS 6403:1981)

$$q_{ult} = C N_c S_c d_c i_c + q (N_q - 1) S_q d_q i_q + 0.5 B \gamma N_\gamma S_\gamma d_\gamma i_\gamma W'$$

Where

C	=	Cohesion in t/m^2
N_c, Nq, N_γ	=	Bearing Capacity Factors (From Table 1 of IS 6403 – 1981)
S_c, S_q, S_γ	=	Shape Factors (From Table 2 of IS 6403 – 1981)
d_c, d_q, d_γ	=	Depth Factors
i_c, i_q, i_γ	=	Inclination Factors
q	=	Effective surcharge at the base level of foundation in t/m^2
B	=	Width of footing, diameter of circular footing in m
γ	=	Bulk unit weight of soil in t/m^3
W'	=	Correction factor for location of water table

At 3m depth (Bore hole 1), the Soil profile is Gravels

If	C	=	0 (Since no Cohesion)
	Φ	=	32.31° (based on laboratory test)
Therefore	N_c	=	37.532;
	N_q	=	25.292;
	N_γ	=	34.256

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

Applying these parameters in the above equation

$$q_{ult} = C N_c S_c d_c i_c + q (N_q - 1) S_q d_q i_q + 0.5 B \gamma N_\gamma S_\gamma d_\gamma i_\gamma W'$$

Where $C = 0$ (Since no Cohesion)

Therefore, $$q_{ult} = q (N_q - 1) S_q d_q i_q + 0.5 B \gamma N_\gamma S_\gamma d_\gamma i_\gamma W'$$

Bearing Capacity calculation through shear density of soil 'γ'

There are two relationships of weight of soil to Volume of soil as

i) Total density or Bulk density

ii) Dry density

Therefore, Total Bulk density, $\gamma_t = \frac{\text{Total Weight of soil}}{\text{Total Volume of soil}} = \frac{W}{V}$

Dry Density $\gamma_d = W_s/V$; Whereas W_s = Total weight of solids

In a particular case the **total density** will be known as **saturated density**, when the soil is saturated. Another density of soil will be known as submerged or buoyant density, γ_b when the soil is submerged in water.

$$\gamma_b = \gamma_t - \gamma_w$$

Where γ_w = Density of water = 1 g/cc or 1 t/m^3

Mostly soils submerged in water are saturated.

Hence $$\gamma_{buoyant} = \gamma_{sat} - \gamma_w$$

Based on the above equations,

$\gamma = \gamma_{sat} = 1.8$ t/m^3

$d = 3$m

Here, $\gamma_b = \gamma_{sat} - 1 = 1.8 - 1 = 0.8$ t/m^3

Therefore, $q = \gamma_b \times d = 0.8 \times 3 = 2.4$ t/m^2

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

$S_q = S_\gamma$ = Shape factor which is equal to 1

$d_q = d_\gamma$ = $1 + 0.1 \frac{df}{B} \sqrt{N\emptyset}$

= 1 (Minimum value of 1 can be taken)

i_q = inclination factor $(1 - \alpha/90)^2$

Where α = inclination of the load to the vertical in degree which is equal to zero

i_q = 1

B = Width of footing (2m)

W' = 0.5

Applying in the above equation

q_{ult} = q (Nq- 1) S_q d_q i_q + 0.5 B γ N_γ S_γ d_γ i_γ W'

= 2.4 x (25.292 - 1) x 1 x 1 x 1 + 0.5 x 2 x 1.8 x 34.256 x 1 x 1 x 1 x 0.5

= 89.131 t/m^2

Applying factor of safety as 3

Then allowable bearing capacity

q_{na} = 89.131 / 3

= 29.71 t/m^2

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FICS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

Settlement Calculations as per IS – 8009 (Part – 1) 1976

1.	Recommended depth of foundation	=	3m from EGL
2.	Soil Strata at 3m depth from EGL	=	Gravels
3.	The allowable bearing capacity value based on shear calculation (as Per IS 6403 – 1981) at 3m depth from EGL	=	297.1 kN/m^2 ≈ 300 kN/m^2
4.	Young's Modulus, Es for Gravels (As per "Foundation analysis and Design" by Bowles, Pg. No. 125)	=	150 Mpa = 150 x 10^3 kN/m^2
5.	Poisson's ratio μ (As per "Foundation analysis and Design" by Bowles, Pg. No. 123)	=	0.3
6.	Width of Foundation	=	2m

Settlement $S_i = I * Q_s * B (1- \mu^2) / E_s$

Q_s = Pressure, Si = Immediate Settlement, I = Influence Factor,
B = Width of Foundation, μ = Poisson's ratio, E_s = Elastic Modulus

S_i = $(0.95 \times 300 \times 2 (1- 0.3^2) / (150 \times 10^3)$
= 0.00346m
= 3.46 mm

Settlement = 3.46 mm < 50mm. Hence safe

The maximum settlement for sand and gravel as per IS 1904 -1986 will be 50mm.
(Details Enclosed)

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

TABLE 1 PERMISSIBLE DIFFERENTIAL SETTLEMENTS AND TILT (ANGULAR DISTORTION) FOR SHALLOW FOUNDATION IN SOILS

(*Clause* 16.3.4)

Sl No.	Type of Structure	Isolated Foundations						Raft Foundations					
		Sand and Hard Clay			Plastic Clay			Sand and Hard Clay			Plastic Clay		
		Maximum settlement	Differential settlement	Angular distortion	Maximum settlement	Differential settlement	Angular distortion	Maximum settlement	Differential settlement	Angular distortion	Maximum settlement	Differential settlement	Angular distortion
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)
i)	For steel structure	50	0·003 3L	1/300	50	0·003 3L	1/300	75	0·003 3L	1/300	100	0·003 3L	1/300
ii)	For reinforced concrete structures	50	0·001 5L	1/666	75	0·001 5L	1/666	75	0·002 1L	1/500	100	0·002L	1/500
iii)	For multistoreyed buildings												
	a) RC or steel framed buildings with panel walls	60	0·002L	1/500	75	0·002L	1/500	75	0·002 5L	1/400	125	0·003 3L	1/300
	b) For load bearing walls												
	1) L/H — 2+	60	0·000 2L	1/5 000	60	0·000 2L	1/5 000	Not likely to be encountered					
	2) L/H — 7+	60	0·000 4L	1/2 500	60	0·000 4L	1/2 500						
iv)	For water towers and silos	50	0·001 5L	1/666	75	0·001 5L	1/666	100	0·002 5L	1/400	125	0·002 5L	1/400

NOTE — The values given in the table may be taken only as a guide and the permissible total settlement/different settlement and tilt (angular distortion) in each case should be decided as per requirements of the designer.

L denotes the length of deflected part of wall/raft or centre-to-centre distance between columns.

H denotes the height of wall from foundation footing.

+For intermediate ratios of L/H, the values can be interpolated.

For JEYAM BUILDERS
Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

SAFE BEARING CAPACITY RESULTS

4. Calculation of Safe bearing capacity of the soil:

4.2 Safe Bearing capacity of soil based on SPT values for Bore Holes 1 to 4

Bore Hole No.	Depth (m)	SPT value	Safe Bearing capacity of soil	
			KN/m^2	t/m^2
BH – 1	1.50	16	110.46	11.04
	3.00	30	229.42	22.94
	4.50	50	399.36	39.93
	6.00	52	416.35	41.63
BH – 2	1.50	40	314.39	31.43
	3.00	53	424.85	42.48
	4.50	54	433.35	43.33
	6.00	55	441.84	44.18
BH – 3	1.50	16	110.46	11.04
	3.00	27	203.92	20.39
	4.50	50	399.36	39.93
	6.00	51	407.85	40.78
BH – 4	1.50	43	339.88	33.98
	3.00	49	390.86	39.08
	4.50	52	416.35	41.63
	6.00	53	424.85	42.48

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
[TJR/RGE/2019/086], Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

4.3 Safe Bearing capacity of soil based on Shear Failure Criteria:

Direct Shear test for Bore Hole 1 & 2

Bore Hole No.	Depth (m)	Normal Stress (kg/cm^2)	Division	Ø (in degrees)	Safe Bearing Capacity of Soil (t/m^2)
BH – 1	1.50	0.5 1.0 1.5	23 74 125	30.39°	14.75
	3.00	0.5 1.0 1.5	23 78 133	32.31°	29.71
	4.50	0.5 1.0 1.5	24 87 151	36.14°	65.80
	6.00	0.5 1.0 1.5	24 88 153	36.57°	87.34
BH – 2	1.50	0.5 1.0 1.5	23 86 149	35.92°	33.01
	3.00	0.5 1.0 1.5	24 90 156	37.20°	59.21
	4.50	0.5 1.0 1.5	24 90 157	37.41°	79.88
	6.00	0.5 1.0 1.5	24 91 158	37.61°	101.56

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

Direct Shear test for Bore Hole 3 & 4

Bore Hole No.	Depth (m)	Normal Stress (kg/cm^2)	Division	Ø (in degrees)	Safe Bearing Capacity of Soil (t/m^2)
BH – 3	1.50	0.5 1.0 1.5	23 74 126	30.64°	15.42
	3.00	0.5 1.0 1.5	23 77 131	31.84°	27.86
	4.50	0.5 1.0 1.5	24 88 152	36.35°	68.18
	6.00	0.5 1.0 1.5	24 89 153	36.57°	87.34
BH – 4	1.50	0.5 1.0 1.5	23 86 150	36.14°	34.34
	3.00	0.5 1.0 1.5	23 86 151	36.35°	51.92
	4.50	0.5 1.0 1.5	23 88 154	36.99°	75.24
	6.00	0.5 1.0 1.5	23 89 155	37.20°	83.68

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FICS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

4.4 Comparison of Safe bearing capacity of soil through Shear and Settlement consideration:

Bore Hole no.	Depth (m)	Safe Bearing Capacity (t/m^2)	
		Shear consideration (Direct Shear)	Settlement consideration
BH – 1	1.50	14.75	11.04
	3.00	29.71	22.94
	4.50	65.80	39.93
	6.00	87.34	41.63
BH – 2	1.50	33.01	31.43
	3.00	59.21	42.48
	4.50	79.88	43.33
	6.00	101.56	44.18
BH – 3	1.50	15.42	11.04
	3.00	27.86	20.39
	4.50	68.18	39.93
	6.00	87.34	40.78
BH – 4	1.50	34.34	33.98
	3.00	51.92	39.08
	4.50	75.24	41.63
	6.00	83.68	42.48

For JEYAM BUILDERS

Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

5. Result:

5.1 Recommended Safe bearing capacity values at different depths

Considering the lesser value of the above, the Safe Bearing Capacity, values at different depths are recommended below:

Bore Hole	Depth (m)	Safe Bearing Capacity (t/m^2)
BH – 1	1.50	11.04
	3.00	22.94
	4.50	39.93
	6.00	41.63
BH – 2	1.50	31.43
	3.00	42.48
	4.50	43.33
	6.00	44.18
BH – 3	1.50	11.04
	3.00	20.39
	4.50	39.93
	6.00	40.78
BH – 4	1.50	33.98
	3.00	39.08
	4.50	41.63
	6.00	42.48

The above test data and findings are relevant and applicable only for the soil conditions existing at the test site. Any change in the soil strata observed during excavation may be reported to the laboratory, which will redefine the safe bearing capacity of the soil.

For Time Institute for Materials Testing

Geo. Technical Engineer

For JEYAM BUILDERS

Managing Partner

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

SOIL SAMPLE PHOTOS

0



6m

Bore Hole No: 1

Depth : 0 to 6m

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FICS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

0



6m

Bore Hole No: 2


Depth : 0 to 6m

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

0

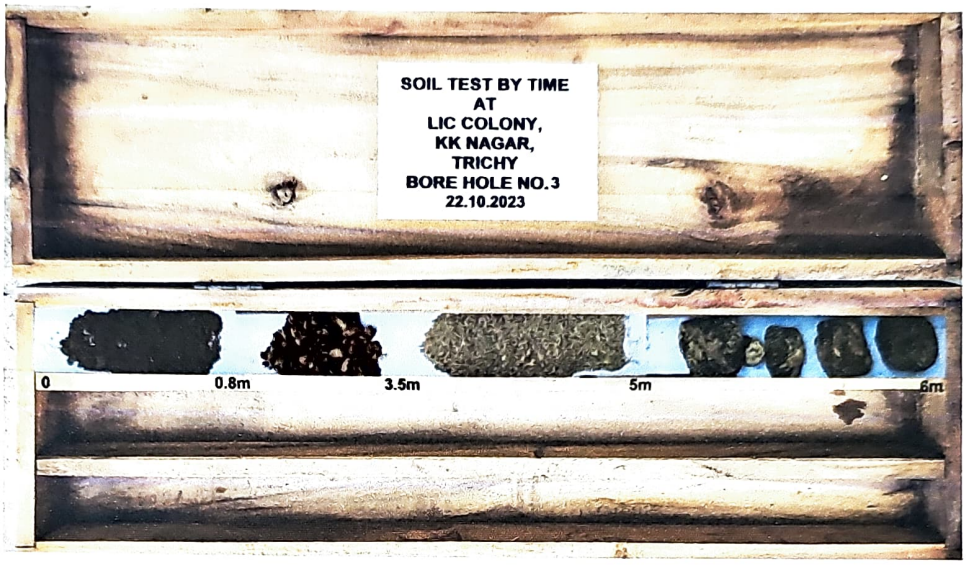

6m

Bore Hole No: 3

Depth : 0 to 6m

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FICS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

0



6m

Bore Hole No: 4

Depth : 0 to 6m

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

SITE PHOTO



LIC Colony, KK Nagar, Trichy

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

ANNEXURE

Time Institute for Materials Testing
Soil Division,
#25, Sanjeevi Nagar,
Trichy- Chennai Byepass road, Trichy - 620 002.
Phone: 0431 2401326
Fax: 0431 2401596
Email: tmaterialstesting@yahoo.co.in

Annexure - A

NATURAL MOISTURE CONTENT
(As per IS 2720 (Part - 2) - 1973)

Project Name : **Soil investigation for construction of Residential Apartment Building at LIC Colony, KK Nagar, Trichy**

Bore Hole No. : **1**

Depth : **3m**

Trial	Wt of container (W) gm	Wt of container +wet soil (W_1) gm	Wt of container + Dry soil (W_2) gm	Wt of Water ($W_3 = W_1-W_2$) gm	Wt of Dry Soil ($W_4 = W_2-W$) gm	Water Content (%) = (W_3-W_4)*100
1	23.70	56.50	53.60	2.9	29.9	9.70
2	23.60	58.90	55.80	3.1	32.2	9.63
3	20.90	51.20	48.50	2.7	27.6	9.78

Natural Moisture Content = 9.70

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FICS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

Time Institute for Materials Testing
Soil Division,
#25, Sanjeevi Nagar,
Trichy- Chennai Byepass road, Trichy - 620 002.
Phone: 0431 2401326
Fax: 0431 2401596
Email: tmaterialstesting@yahoo.co.in

Annexure - B

SPECIFIC GRAVITY TEST
(As per IS 2720 (Part - 3) - 1980)

Project Name : **Soil investigation for construction of Residential Apartment Building at LIC Colony, KK Nagar, Trichy**

Bore Hole No. : **1**

Depth : **3m**

Trial	Bottle Wt (W1) gm	Bottle + Sample (W2) gm	Bottle + Sample + Water (W3) gm	Bottle + Water (W4) gm	Specific Gravity
1	32.6	93.1	118.6	80.8	2.665
2	32.6	92.4	118.1	80.8	2.658
3	32.6	90.6	117.0	80.8	2.661

Specific gravity of Fine Aggregate = 2.66

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FICS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

Time Institute for Materials Testing
Soil Division,
#25, Sanjeevi Nagar,
Trichy- Chennai Byepass road, Trichy - 620 002.
Phone: 0431 2401326
Fax: 0431 2401596
Email: tmaterialstesting@yahoo.co.in

Annexure - C

DENSITY CALCULATION

Project Name : **Soil investigation for construction of Residential Apartment Building at LIC Colony, KK Nagar, Trichy**

Bore Hole No. : **1**

Depth : **3m**

Sl. No.	Description	Reading
1	Weight of Empty Box (gm)	630.00
2	Weight of Box + Soil (gm)	808.00
3	Weight of Soil (gm)	178.00
4	Volume of Box (cm^3)	90.00
5	**Bulk Density (gm/cm^3)**	**1.98**
6	Weight of Container (gm)	23.70
7	Weight of Container + Wet Soil (gm)	56.50
8	Weight of Container + Dry Soil (gm)	53.60
9	Moisture Content (%)	9.70
10	**Dry Density (gm/cm^3)**	**1.80**

Result

Bulk Density of Soil = 1.98

Dry Density of Soil = 1.80

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

Time Institute for Materials Testing
Soil Division,
#25, Sanjeevi Nagar,
Trichy- Chennai Byepass road, Trichy - 620 002.
Phone: 0431 2401326
Fax: 0431 2401596
Email: tmaterialstesting@yahoo.co.in

Annexure - D

POROSITY & VOID RATIO

Project Name : **Soil investigation for construction of Residential Apartment Building at LIC Colony, KK Nagar, Trichy**

Bore Hole No. : **1**

Depth : **3m**

Sl. No.	Description	Reading
1	Dry Density γ_d (gm/cm^3)	1.80
2	Specific gravity (G_s)	2.66
	Porosity (%)	(1 – (γd/Gs))*100
		(1-(1.80/2.66)) x 100 = 32.33
3	**Porosity (%)**	**32**
	Void Ratio, (e)	η/(1-η)
		0.3233/(1-0.3233)
4	**Void Ratio**	**0.47**

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

Time Institute for Materials Testing
Soil Division,
#25, Sanjeevi Nagar,
Trichy - Chennai Byepass Road, Trichy - 620 002.
Phone: 0431 2401326
Fax: 0431 2401596
Email: tmaterialstesting@yahoo.co.in

Annexure - E

FINENESS MODULUS TEST


(As per IS 2720 (Part - 4) - 1985)

Project Name : **Soil investigation for construction of Residential Apartment Building at LIC Colony, KK Nagar, Trichy**

Bore Hole No. : **1**

Depth : **1.5m**

Sieve size	Weight retained	Cumulative Weight retained (gm)	Percentage cumulative weight retained (gm)	Percentage of passing
10	0	0.0	0.0	100.0
4.75	19.8	19.8	19.8	80.2
2.36	6.2	26.0	26.0	74.0
1.18	10.1	36.1	36.1	63.9
0.6	16	52.1	52.1	47.9
0.3	17.5	69.6	69.6	30.4
0.15	12.3	81.9	81.9	18.1
0.075	9.5	91.4	91.4	8.6
Pan	8.6	100.0	100.0	0.0

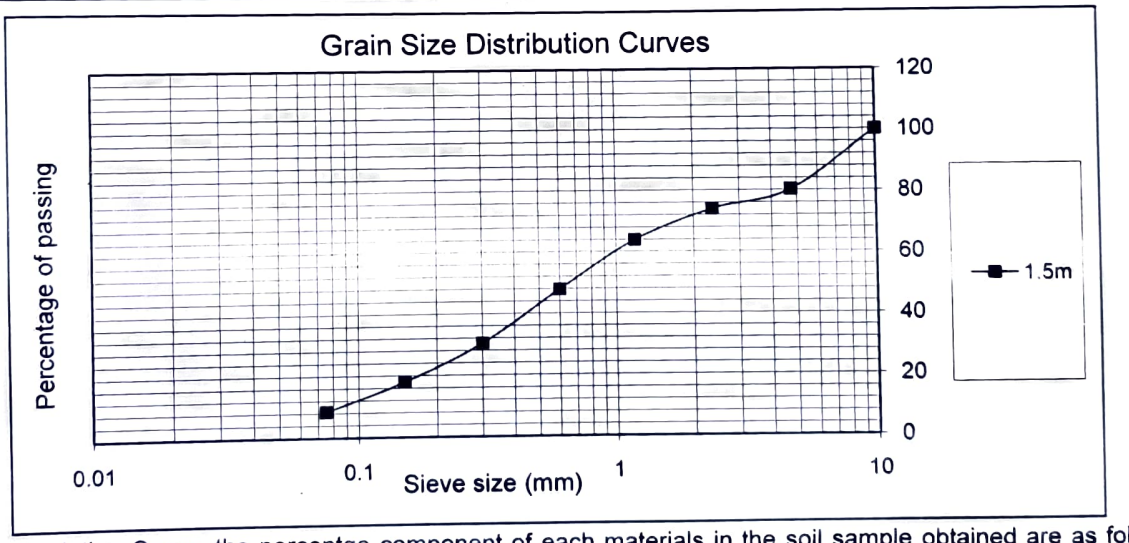

Based on Gradation Curve, the percentge component of each materials in the soil sample obtained are as follows (As per IS 1498 - 1970).

Gravel (%)	19.8
Coarse Sand (%)	16.3
Medium Sand (%)	33.5
Fine sand (%)	21.8
Silt & Clay (%)	8.6

Dr.S.SENTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MIEI
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090

For JEYAM BUILDERS

Managing Partner

Time Institute for Materials Testing
Soil Division,
#25, Sanjeevi Nagar,
Trichy- Chennai Byepass road, Trichy - 620 002.
Phone: 0431 2401326
Fax: 0431 2401596
Email: tmaterialstesting@yahoo.co.in

Annexure - F

Direct Shear Test (IS 2720 - Part 13 -1986)

Bore Hole	1
Depth (m)	3m
Date of Test	25.10.2023

L.C. Of Dial Gauge	0.002
Proving ring Constant	0.206996
Area of the specimen (cm^2)	36

Trial 1

Normal Stress: 0.5 kg/cm^2

Horizontal Gauge Reading	Proving Ring Reading	Shear Deformation	Shear Stress (kg/cm^2)
0	0	0.00	0.000
50	9	0.50	0.052
100	11	1.00	0.063
150	13	1.50	0.075
200	15	2.00	0.086
250	17	2.50	0.098
300	19	3.00	0.109
350	21	3.50	0.121
400	23	4.00	0.132

Trial 2


Normal Stress: 1 kg/cm^2

Horizontal Gauge Reading	Proving Ring Reading	Shear Deformation	Shear Stress (kg/cm^2)
0	0	0.00	0.000
50	34	0.50	0.195
100	37	1.00	0.213
150	41	1.50	0.236
200	45	2.00	0.259
250	50	2.50	0.287
300	53	3.00	0.305
350	57	3.50	0.328
400	61	4.00	0.351
450	65	4.50	0.374
500	70	5.00	0.402
550	78	5.50	0.448


Trial 3

Normal Stress: 1.5 kg/cm^2

Horizontal Gauge Reading	Proving Ring Reading	Shear Deformation	Shear Stress (kg/cm^2)
0	0	0.00	0.000
50	85	0.50	0.489
100	88	1.00	0.506
150	91	1.50	0.523
200	94	2.00	0.540
250	97	2.50	0.558
300	101	3.00	0.581
350	106	3.50	0.609
400	110	4.00	0.632
450	113	4.50	0.650
500	117	5.00	0.673
550	121	5.50	0.696
600	124	6.00	0.713
650	129	6.50	0.742
700	133	7.00	0.765

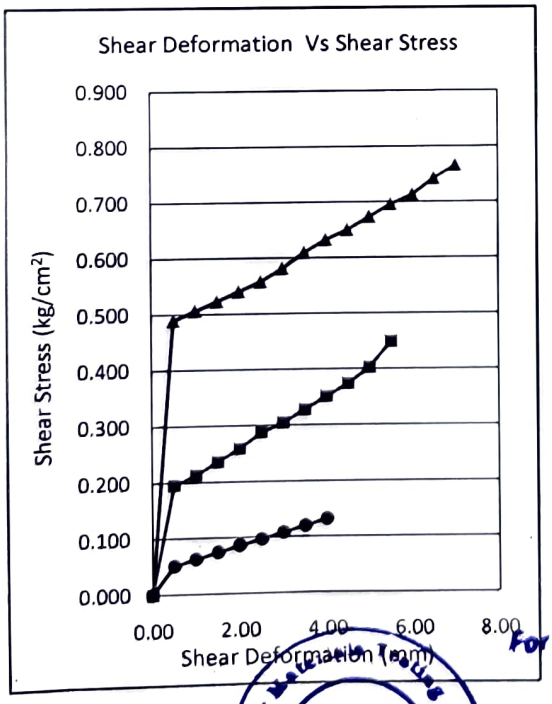

Normal Stress (Kg/cm^2)	Proving Ring Reading at failure	Shear Stress (kg/cm^2)
0.50	23	0.132
1.00	78	0.448
1.50	133	0.765

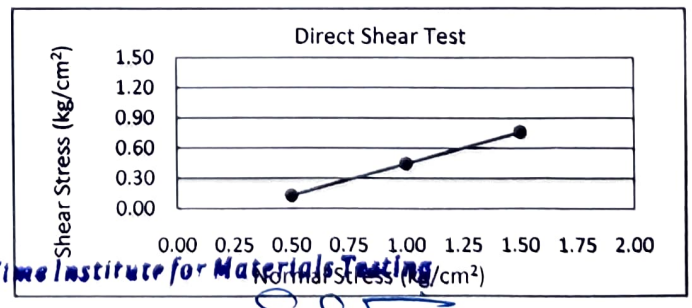

Ø = $\tan^{-1}$ (0.765 - 0.132)

Angle of Shearing Resistance (Ø) = 32.31 °

For Time Institute for Materials Testing

Geo Technical Engineer

For JEYAM BUILDERS

Managing Partner

Dr.S.SANTHAMIL KUMAR, B.E.,M.E.,Ph.D.,FIGS,MISTE
Registered Geotechnical Engineer,
(TJR/RGE/2019/086), Chartered Engineer,
703, Plot No. 29, OM Rajoo Nagar,
Near New Bus Stand, THANJAVUR - 613 005.
Mobile : 9443976090



our services doesn't just end there

Buying & Selling Services

Property Buying Assistance, Property Selling Support, Market Price Analysis, Owner Outreach and Negotiation.

Legal & Documentation Services

Certified EC, Patta, legal opinions, property verification, due diligence, litigation solutions, and legal heir certificates.

Property Development & Approvals

Building plan approvals, construction, layout and sub-division approvals, zone conversion, and occupancy certification.

NRI & Investment Services

Escrow Services, Rentals, Litigation Solutions, Property Valuation and Property Management

Compliance & Special Services

Demolition, Vaasthu checks, regularization of unauthorized buildings, and office space solutions.



empowering your real estate decisions with smart tools

Property Valuation & Cost Estimation

Guideline Value, Apartment Composite Value, Stamp Duty & Registration Fees Calculator, Building Value Calculator, Capital Gains Calculator, Area Unit Converter, Length Unit Converter

Ownership, Compliance & Legal Verification

Encumbrance Certificate (EC) Search, Find Your SRO, Temple Property Check, WAQF Property Check, View Patta/Chitta, View FMB, Patta Analyzer, EC Analyzer

Zoning & Land Use Analysis

Land Use Zone Finder, CRZ Zone Check, Aquifer Zone Check, CBA Check, EWS Check, Road Width Check, Proposed Road Widening Check, FSI Calculator

Property Documentation & Workflow Tools

Forms & Templates, Document Generator, Document Translation, Dictionary

Vastu & Property Management Tools

Home Vastu Shastra, Plot Vastu Shastra, Property Management

Verified RealEstate™

We're honored to be part of your real estate journey

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996
www.verified.realestate