Verified RealEstate™

RE REGULATORY RECORD

RERA Document

The document as the regulator published it, reproduced in full behind this page.

Published for reference. The authority's own register is the operative record.

Verified RealEstate™
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India

hello@verified.realestate
+91 9996 12 9996
verified.realestate

DIGITALLY VERIFIED RECORD

STABILITY CERTIFICATE

The detailed engineering and structure design of the proposed building comprising of Silt +3 floors at Plot no 61 & 62 with 16 Dewiling Units in approved layout L.P/D.T.C.P No 02/2022, Extent 736.60 Sq.mt, Krishnagiri -Hosur New Town Development Authority, Krishnagiri District, Hosur Taluk, Hosur Panchayat Union, Achettipalli village. S.No. 309/38 & 309/39 has been done by me based on the report of geotechnical investigation (soil test) done by **Srb Civil Laboratory** Report No **SRB/CIVIL/GT/2023-24/185** Dated **14-08-2024** and considering the functional requirement of the building.

2. It is certified that among other factors, the proposed building has been designed to resist earthquake. I/We have checked various parameters and found that the proposed building would be safe.

3. I/We further certify that:

(i) The minimum grade of concrete is M25

(ii) The design and analysis has been done using the code of practice for plain and reinforced concrete as per IS 456, design loads as per IS Codes No IS 875:1987 Part II and Design of earthquake resistant structure as per IS Code No: 1893:2016.

4. The building will be safe and sound when used for the purpose for which it is designed.

G.GUNA M.Tech (Structures).,AIV
Structural Engineer Grade-II(SE)
CMDA : SE / II / 2024 / 7 / 0275
DTCP : TVR / SE-II / 2024 / 029
No.9/5, Sri Ragavendra Enclave
Mathavan Street, Pammal - 600 075.
Email: gconchennai@gmail.com
Ph: 09566 163232

Stamp and Signature

Encl.: Structural Design Calculation

HOSUR (ICON-2)

Date : 17.03.2025

DESIGN BASIS REPORT

THE PROPOSED CONSTRUCTION OF STILT FLOOR + 3 FLOORS RESIDENTIAL BUILDING (APPARTMENT) FOR M/S G SQUARE PRISTINE , AT PLOT NO : 61 & 62,, SY NO : 309, NEAR TITAN TOWNSHIP ,NEXT TO SOPPATI VILLAGE ,MATHIGIRI POST, HOSUR, KRISHNAGIRI (ICON-2)

This is to Certify that the Proposed Building (RCC Roof) consists of stilt +3 Floor only.

This Proposed building site has been inspected on by me and the required details such as soil Report & other details etc. have been collected and foundation details are enclosed here with.

The Proposed Building which has been designed as per IS code IS 875 and structures of stilt +3 floor only. So, I here by certify that the Building will be structurally safe. No more future Vertical expansion will be allowed except stair head room etc, if necessary.

G.GUNA M.Tech (Structures).,AIV
Structural Engineer Grade-II(SE)
CMDA : SE / II / 2024 / 7 / 0275
DTCP : TVR / SE-II / 2024 / 029
No.9/5, Sri Ragavendra Enclave
Mathavan Street, Pammal - 600 075.
Email: gconchennai@gmail.com
Ph: 09566 163232

SUBMITTED BY

GCON ENGINEERS

G1 , Ekambaram street,
Pammal, Chennai-75.

DBR –R0 DATE : 17-03-2025				
DESCRIPTION	**COMMENTS**	**GCON (STRUCTURAL CONSULTANT) SIGN & STAMP**	**ARCHITECT SIGN & STAMP**	**CLIENT SIGN & STAMP**

STRUCTURAL DESIGN BASIS REPORT
CONTENTS

1. GENERAL PROJECT DETAILS

2. LIST OF REFERENCES

3. MATERIAL, WORKMANSHIP, INSPECTION AND TESTING

3.1 Concrete
3.2 Durability of concrete

3.3 Reinforcement

3.4 Structural Steel

4.0 FOUNDATION SYSTEM

5.0 GENERAL DESIGN CONSIDARATIONS
5.1 Method of Design

5.2 Loads & Forces

5.2a Dead load.

5.2b load combinations

6.0 Residential building
6.1 Residential buildings.

6.1a Imposed load.

6.1b (ii) Analysis approach.

6.1c Seismic analysis.

6.1c (i) General Principles and Design Criteria.

6.1c (ii) Design Spectrum

6.1d. Wind analysis.

7.0 Conclusion
7.1 Other load.

8.0 Layout

9.0 Etab model

10.0 Design
10.1 footing design
10.2 column design
10.3 beam design

1) GENERAL PROJECT DETAILS

Structural Design Introduction

The proposed structure is STILT+3Storey residential apartment building situated at achettipalli village, hosur taluk, krishnagiri district ,India. In this brief report we are presenting the data and assumptions related to the project, which has lead to the conceptual design at this preliminary stage. The document attempts to record all inputs assumed in design and will form the basis for all future detailed structural work.

The report most importantly clarifies the load criteria assumed in the design and it is therefore expected that all related consultants, including the architects, would go through the document and refer to it at every stage of detailed design. Recommendations or revisions on assumed parameters are requested at this stage.

Besides this the report will also form the outline of the design criteria and methods of both analysis and design to be adopted in this project with the aim of achieving a design that satisfies all sorts of seismic, and serviceability requirements.

2. List of References:

IS 456-2000	Plain and reinforced concrete-code of practice
IS 875	Code Of practice for design loads for buildings and structures
Part 1: 1987	dead loads- unit weights of building material and stored material
Part 2: 1987	Imposed loads
Part 3: 1987	Wind loads
IS 1893: 2016	Criteria for earthquake resistant design of structures
IS1904-1986 (Reaffirmed 2006)	Code of practice for design & construction of foundation in soils
IS 4326:1993	Code of practice for earthquake resistant design and construction of buildings
IS 13920: 1993	Code of practice for ductile detailing of reinforced concrete structures subjected to seismic forces
BS 8110 : 1997	Plain and reinforced concrete-code of practice(British standard)
ACI 318	Plain and reinforced concrete-code of practice (American standard)
CP65	Plain and reinforced concrete-code of practice (Singapore standard)
IS 800:1984 & 2007	Code of practice for general construction in steel
IS 1343:2012	Code of practice for pre-stressed concrete (First Revision)
Reynolds Handbook	
IS 3414	Code of practice for joints in the buildings
IS 3370 Part 1 TO 4	Code of practice for liquid retaining structures
BS-8007	Code of practice for liquid retaining structures for crack width calculation
Soil Report	

3. Material, Workmanship, Inspection and Testing:

The proposed RCC structure will consists of concrete and steel reinforcement as the two main materials used for construction of the structure. The specifications for these materials are discussed in this chapter

3.1 Concrete:

The concrete shall be in grades designated as per Table 2 IS 456-2000.
Recommended grades for the different members is as follows:

Footing/column	M25
Shear wall/lift	M25
Beams/Slabs	M25

Any other structural member will be in general designed in M25.

3.2 Durability of concrete

The structure is located in Coimbatore, where the climatic conditions are considered as moderate. Concrete grade of submerged structural elements will be a minimum of M25. Nominal covers shall not be less than 30 mm from a durability point of view.

The cover to the various structural elements is to be as follows,

Structural Element	Clear Cover in mm
Slabs	25
Beams	30
Shear walls/Shear wall	40
Footings	50
Structural elements under ground	50

3.3 Reinforcement:

The reinforcement shall be high strength deformed steel bars with yield strength of 550 N/mm^2 confirming to IS: 1786.

3.4 Structural Steel

The structural steel to be used shall confirm to IS 800

4) Foundation system:

SHALLOW FOUNDATION: Isolated Footing at 2.550 m from the natural ground level with 317.59 KN safe bearing capacity.

5) General design considerations:

5.1 Method of Design

The aim of design is the achievement of an acceptable probability that structures being designed will perform satisfactorily during their intended life. With an appropriate degree of safety, they should sustain all the loads and deformations of normal construction and use and have adequate durability and adequate resistance to the effects of earthquake, wind and fire.

Structures and structural elements will be designed by Limit State Method. Due consideration will give to the accepted theories, experience and modern philosophy of design.

5.2 Loads and Forces

In structural design, account is taken of the dead, imposed and wind loads and forces such as those caused by earthquake etc., where applicable.

5.2(a) Dead Loads

The dead loads are calculated on the basis of unit weights of materials given in IS 875 (Part 1) the data provided by consultant and other service consultants will be used for the specific materials/equipment.

Unless otherwise specified the unit weight of materials will be used as follows.

Reinforced Concrete	25 kN/cum
Plain concrete	24 kN/cum
Brickwork	20 kN/cum
Soil dry	16 kN/cum
Floor finishes	20 kN/cum
Structural steel	78.5 kN/cum
Water	9.81 kN/cum

5.2 b Load Combinations considered:

1. 1.5D+1.5L
2. 1.2D+1.2L+1.2WX
3. 1.2D+1.2L-1.2WX
4. 1.2D+1.2L+1.2WZ
5. 1.2D+1.2L-1.2WZ
6. 0.9D+1.5WX
7. 0.9D-1.5WX
8. 0.9D+1.5WZ
9. 0.9D-1.5WZ
10. 1.5D+1.5WX
11. 1.5D-1.5WX
12. 1.5D+1.5WZ
13. 1.5D-1.5WZ
14. 1.2D+1.2L+1.2SX
15. 1.2D+1.2L-1.2SX
16. 1.2D+1.2L+1.2SZ
17. 1.2D+1.2L-1.2SZ

18. 0.9D+1.5SX
19. 0.9D-1.5SX
20. 0.9D+1.5SZ
21. 0.9D-1.5SZ
22. 1.5D+1.5SX
23. 1.5D-1.5SX
24. 1.5D+1.5SZ
25. 1.5D-1.5SZ
26. 1.2DL+1.2TL
27. 1.2DL+1.2LL+1.2TL
28. 1.2DL+1.2LL+1.2WX+1.2TL
29. 1.2DL+1.2LL +1.2WY+1.2TL
30. 1.2DL+1.2LL +1.2SX+1.2TL
31. 1.2DL+1.2LL +1.2SY+1.2TL

Following **Service load** combinations will be considered for the analysis of the structure.

1. DL+ LL
2. DL + 0.8 LL ± 0.8WX
3. DL + 0.8 LL ± 0.8WY
4. DL ± WX
5. DL ± WY
6. DL + 0.8 LL ± 0.8SX
7. DL + 0.8 LL ± 0.8SY
8. DL± SX
9. DL± SY

Software's for the analysis & design:

a. ETABS
b. Adapt / Safe
c. Excel program sheet
d. RCDC

6.0 Residential building

6.1 Residential building:

The special features for this building are listed as below.

The proposed building is residential building. Stilt floor is intended for parking, and toilets, drive ways. Above stilt floor typical floors are intended for Residential purpose which includes 1st to 3rd floors and terrace , LMR & head room floor above it.

6.1a Imposed Loads:

Imposed loads are assumed in accordance with IS 875 part 2, as follows. The table listed below is a summary of these loads.

Sr.No.	Area Description	Floor Finish kN/sq.m	Live load kN/sq.m	Super imposed dead load	Remark / comment
1	Room	1.5	2	-	
2	Staircase	1.5	3	3	-
3	Lobby/corridor/passage	1.5	3	-	-
4	Living room	1.5	2	-	-
5	Balcony	1.5	3	3	-
7	Kitchen	1.5	2	-	-
8	Toilet	1.5	2	0	-
9	Dining	1.5	2	0	-
10	Utility	1.5	3	0	
11	Store room	1.5	5	0	
12	Terrace	3	2	0	150 mm water proofing considered.
13	Water Tank	1.5	12	-	1.5 m depth of tank is considered.

6.1b Analysis Approach

Structural Geometry:

The structure consists of 4 slabs. The slabs with their description, levels, heights and approximate areas are given in table below:

Floor	Height
Head room	3
Terrace	3
3rd	3
2nd	3
1st	3
Total	15

Structural Frames

The proposed building is RCC frame structure, with Column & RCC beam framing is proposed for the typical floor system. After taking into considerations the feasibility of particular system, clear height available for particular floor, mobility of the services below slab, cost estimation, provision of openings in the slab, approval of architects, other consultants and client, the final framing system has been arrived.

6.1c Seismic Analysis:

6.1c (i) General Principles and design criteria

The structure is located in the seismic zone II. The design lateral force will calculated as per the method described in the following paragraphs. The structure is primarily shear wall and beam framing system although due considerations will be given to the major suggestions/clauses from IS:13920, the basic frame is assumed to be as column structure, as per Table 7.

6.1c (ii) Design Spectrum

Seismic Analysis (Initial analysis for preliminary shear wall sizing) The design Horizontal seismic coefficient for a structure

$$Ah = \frac{Z\ I\ Sa}{2\ R\ g}$$ IS:1893-2016 Clause 6.4.2

Where,

Z = Zone factor 0.16 for Zone II — Table 2

I = Importance Factor (1.5) — Table 6

R =Response reduction factor 5 — For Shear wall building from Table 7

Sa/g =Average Response acceleration coefficient

$T = 0.075\ h^{0.75}$ For RC frame building Clause 7.6

Where,

T is Fundamental natural period h = Height of the structure

$T = 0.075 \times 12^{0.75}$

=0.48

Sa/g = 2.45

Design Seismic Base shear V_b

$=A_h\ W$

Where,

W = seismic weight Ah = 0.06

6.1(d) Wind Loads

Wind load for design of structures shall be based on the design wind speed arrived from IS: 875 (Part3)-1987.

The parameters for calculation of design wind speed as per IS: 875 (Part 3)-1987.


Basic wind speed, V_b : 33 m/ sec.
Risk Coefficient, K1 : 1
(If design life of structure taken as 50 yrs.)
Terrain, Height, Structure size factor, K2 : To suit the height of the structure for Terrain category-2 & class c is 1.11
Topography factor, K3. : 1.0.
K4 factor value : 1.0
Design Wind Speed Vz : 36.6 m/s.
Design Wind Pressure Pz : 0.6x (36.6) ^{2}= 803.7 N/m^2

7 Conclusions.

7.1 Other loads: Any other loads like those of services; storage etc. will be obtained from time to time from the relevant consultants and incorporated. The top slab of the lift shaft will be designed for lift loads as obtained from the manufacturer.

G.GUNA M.Tech (Structures).,AIV
Structural Engineer Grade-II(SE)
CMDA : SE / II / 2024 / 7 / 0275
DTCP : TVR / RSE-II / 2024 / 029
No.9/5, Sri Ragavendra Enclave
Mathavan Street, Pammal - 600 075.
Email: gconchennai@gmail.com
Ph: 09566 163232

8 Layout.

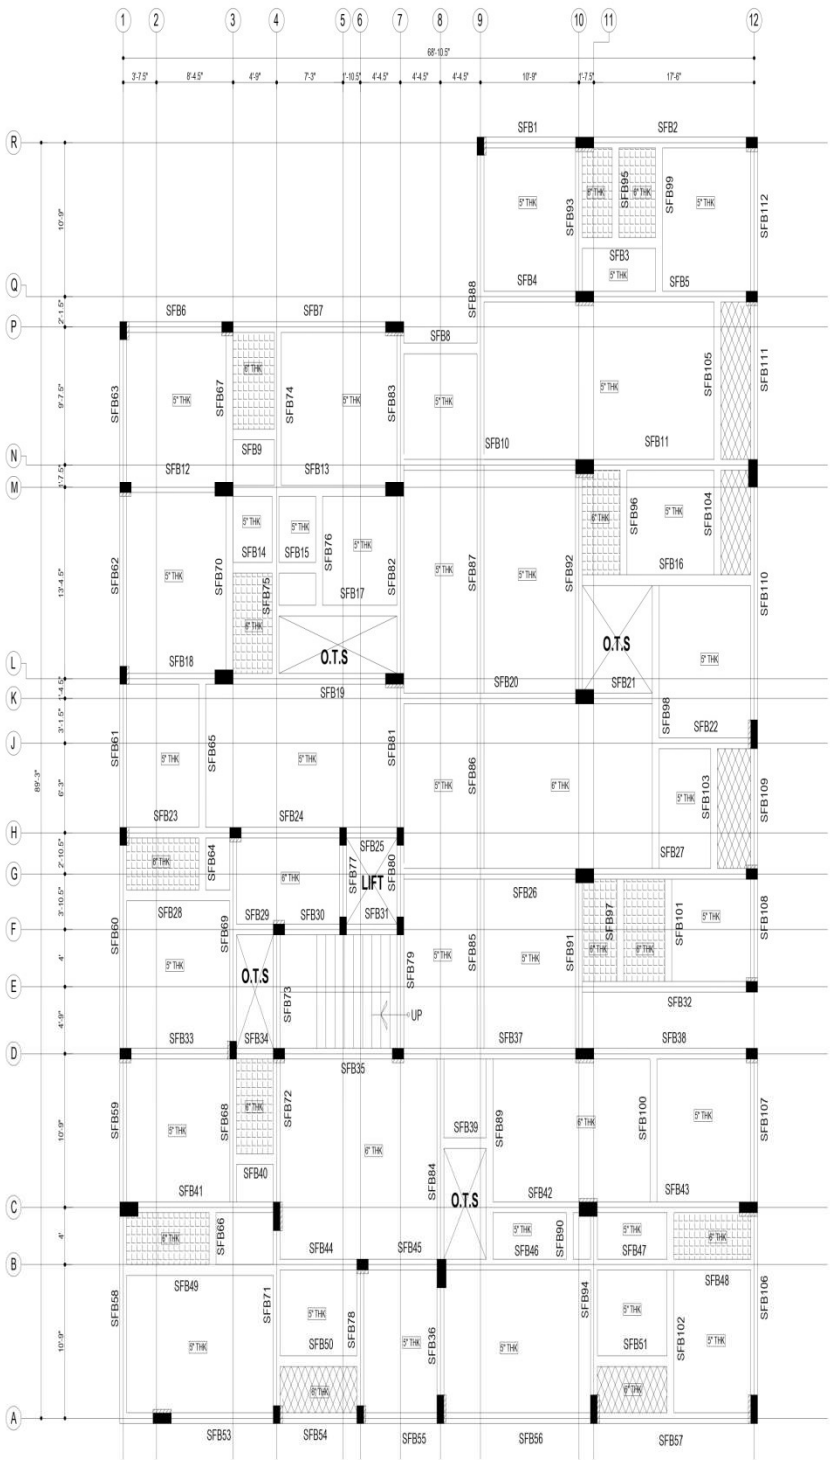

STILT FLOOR ROOF BEAM LAYOUT

NOTES:

1. CONTRACTOR TO CHECK AND VERIFY ALL DIMENSIONS BEFORE THE EXECUTION OF WORK.
2. THIS DRAWING TO BE READ IN CONJUNCTION WITH THE KEY PLAN AND ALL OTHER RELEVANT DRAWINGS.
3. ALL DIMENSIONS ARE IN FEET AND INCHES UNLESS OTHERWISE SPECIFIED.
4. USE CONCRETE - M25.
5. ALL REINFORCEMENTS SHALL BE OF GRADE Fe550 CONFIRMING IS-1786
6. FOOTING DESIGNED FOR S+3 ONLY.
7. NO ADMITURES SHALL BE ADDED WITHOUT PERMISSION OF CONSULTANT
8. CLEAR COVER TO REINFORCEMENT FOR
   a) FOUNDATION - 2" c) COLUMN - 1½"
   b) BEAM -1" d) SLAB - ½"
9. SBC OF SOIL CONSIDERED AS 299.26Kn/sqm AS PER SOIL REPORT
10. LAPPING SHALL BE 50 TIMES DIA. OF THE BAR.
11. STRUCTURAL DETAILED DRAWINGS ARE ISSUED FOR S+3 ONLY.
12. DE-SHUTTERING PERIOD AS PER IS 456
13. ALL SORTS OF PRECAUTIONARY MEASURES WILL BE TAKEN AT THE TIME OF CONSTRUCTION.
14. ONLY WRITTEN DIMENSIONS ARE TO BE FOLLOWED.

R0	ISSUE FOR APPROVAL	09-11-2024
Rev.	Description	DATE

CLIENT:

ARCHITECT:

G SQUARE PRISTINE

CONSULTANT:

GCON ENGINEERS

email: gconchennai@gmail.com

PROJECT TITLE:
PROPOSED RESIDENTIAL BUILDING AT ACHETTIPALLI VILLAGE,HOSUR TALUK,KRISHNAGIRI DISTRICT. GS PRISTINE PLOT NO-61,62 (ICON-2)

DRAWING TITLE:
STILT FLOOR ROOF BEAM LAYOUT


DRAWN:	DESIGNED:	APPROVED:	STAGE:
SATHURU	HARI	G.G.	APPROVAL
SCALE: 1:4"	DATE: 09-11-2024	E-MAIL: gconchennai@gmail.com	

DRAWING NO: GC/24217/ICON -2/SD/RCC/STFBL/11
REVISION: R0

THIS DRAWING IS THE PROPERTY OF GCON ENGINEERS WITHOUT WRITTEN PERMISSION ANY COPYING, TRANSMITTAL TO OTHERS AND ANY USE EXCEPT FOR WHICH IT IS LOANED IS PROHIBITED AND MUST BE RETURNED ON REQUEST.

ORIGINAL SIZE OF THIS DRAWING IS A1

9 Etab model.

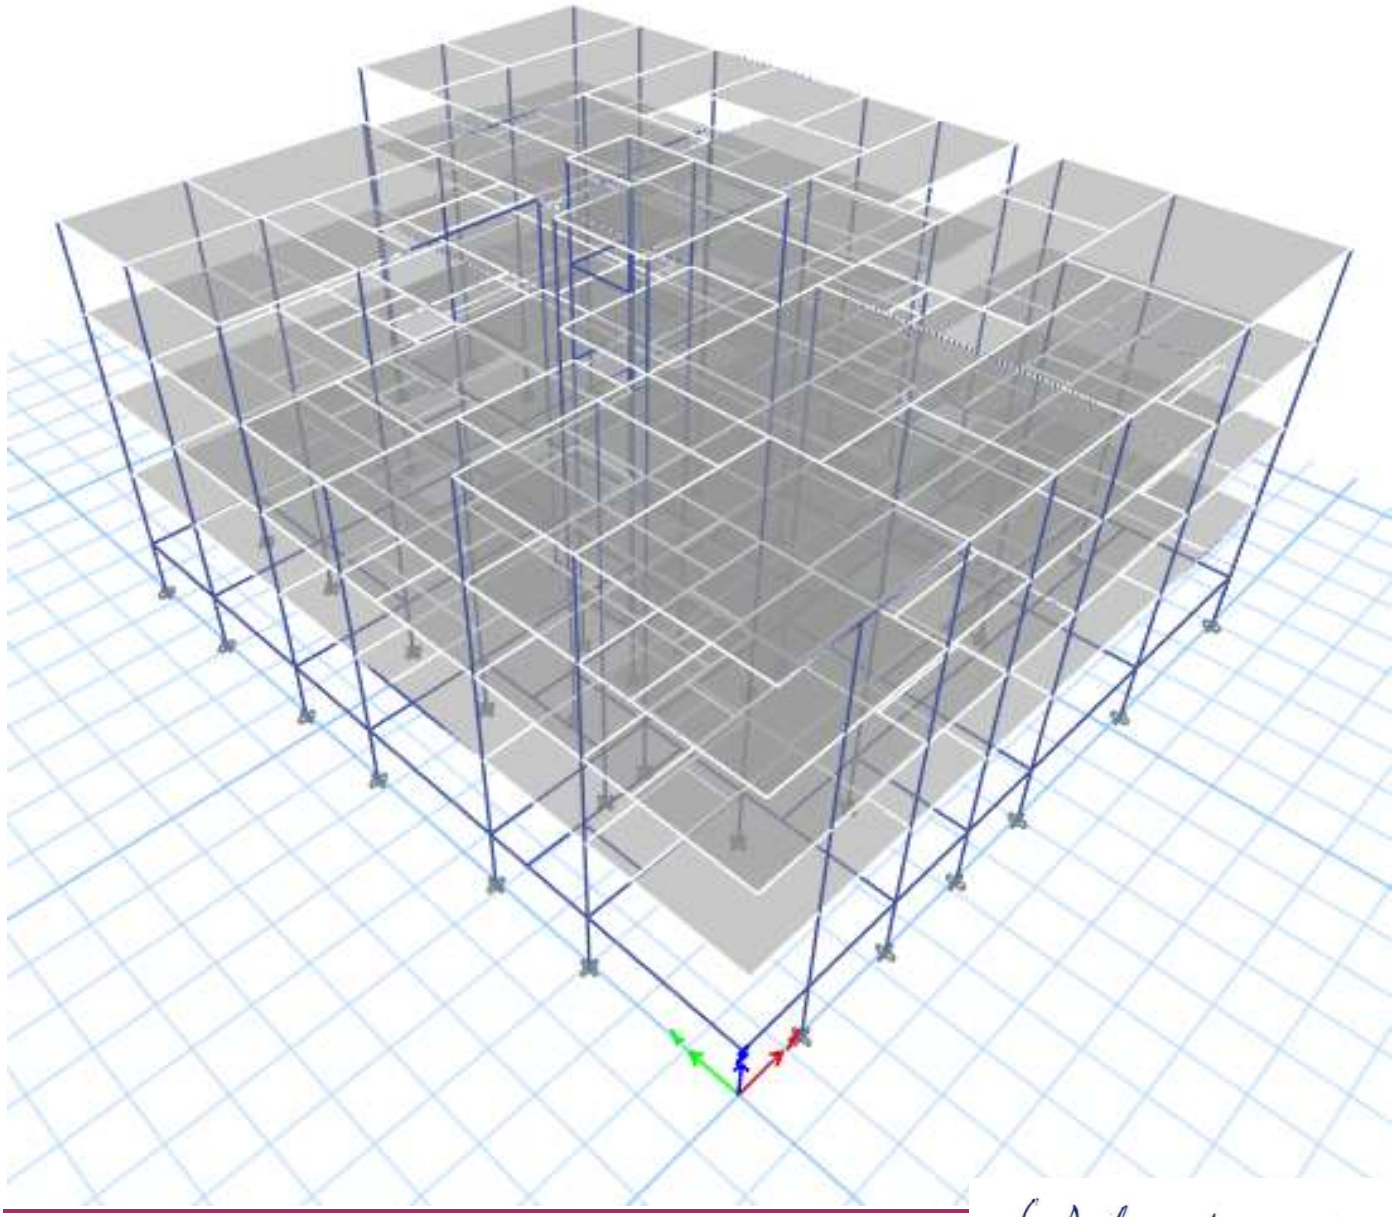

G.GUNA M.Tech (Structures).,AIV
Structural Engineer Grade-II(SE)
CMDA : SE / II / 2024 / 7 / 0275
DTCP : TVR / SE-II / 2024 / 029
No.9/5, Sri Ragavendra Enclave
Mathavan Street, Pammal - 600 075.
Email: gconchennai@gmail.com
Ph: 09566 163232

10 DESIGN.

10.1 FOOTING DESIGN:

Design Code	: IS 456 : 2000 + IS 13920 : 2016	
Footing No	: FC1	
Column No	: C27,C6,C29,C30,C25,C24,C32,C33 (300 mm X 375 mm)	
Analysis No	: C27,C6,C29,C30,C25,C24,C32,C33	
Concrete Grade	: M25	N/sqmm
Steel Grade	: Fe550	N/sqmm
Clear Cover	: 40	mm
Df	: 3.5 M	
Dw	: 1 M	
Density of Soil	= 18	kN/cum
Soil Bearing Capacity	= 299	kN/sqm
Gross Bearing Capacity	= 362	kN/sqm
Permissible SBC Increase for EQ	= 25	%
Permissible SBC Increase for Wind	= 25	%
Live Load Reduction	= 50	%
Permissible area of loss of contact	= 0	%
Cross Section designed by	: Maximum pressure	
Consider overburden pressure		

G.GUNA M.Tech (Structures).,AIV
Structural Engineer Grade-II(SE)
CMDA : SE / II / 2024 / 7 / 0275
DTCP : TVR / RSE-II / 2024 / 029
No.9/5, Sri Ragavendra Enclave
Mathavan Street, Pammal - 600 075.
Email: gconchennai@gmail.com
Ph: 09566 163232

HOSUR (ICON-2)

Footing Type	:	Pad	
Footing Size (L x B x D)	:	1300mm X 1200mm X 375mm	
Without considering Effect of Water Table			
Footing Self Wt., F1	=	14.62	kN
Soil Weight, S1	=	81.42	kN
Total Weight, W1	=	F1 + S1	
	=	96.05	kN
Considering Effect of Water Table			
Footing Self Wt., F2	=	8.77	kN
Soil Weight, S2	=	50.66	kN
Weight of Water (Submerged column), Wc	=	2.39	kN
Total Weight, W2	=	F2 + S2 - Wc	
	=	57.05	kN
Offset Along L (Loff)	=	462.5	mm
Offset Along B (Boff)	=	450	mm

Check For Maximum Soil Pressure:

Critical Column No	=	C27	
Critical Analysis Load Combination	=	FOOT	
Critical Load Combination	=	[15] : (Dead) +(SDL) +(Live) +(RLL)	
Pcomb	=	415.22	kN
P	=	Pcomb + W1	
P	=	511.27	kN
Mx	=	8.86	kNm
My	=	-1.74	kNm
P/A	=	327.74	kN/sqm
Mx/Zx	=	26.2	kN/sqm
My/Zy	=	-5.57	kN/sqm
Maximum Soil Pressure	=	359.51	kN/sqm
Allowable Soil Pressure	=	(1 X 299) + 63	kN/sqm
	=	362	kN/sqm

Check For Minimum Soil Pressure:

Critical Column No	=	C29	
Critical Analysis Load Combination	=	FOOT	
Critical Load Combination	=	[15] : (Dead) +(SDL) +(Live) +(RLL)	
Pcomb	=	280.67	kN
P	=	Pcomb + W2	
P	=	337.72	kN
Mx	=	0.63	kNm
My	=	-1.62	kNm

P/A	=	216.49	kN/sqm
Mx/Zx	=	1.86	kN/sqm
My/Zy	=	-5.18	kN/sqm
Minimum Soil Pressure	=	209.45	kN/sqm
	>	0	

Design For Bending:

Bottom Reinforcement Along L:

Critical Column No	=	C32	
Critical Analysis Load Combination	=	DConS10	
Critical Load Combination	=	[25] : 1.5 (Dead) +1.5 (SDL) -1.5 (EQ+Y)	
Pu	=	688.21	kN
Mux	=	-44.29	kNm
Muy	=	0.32	kNm
P/A	=	441.16	kN/sqm
Mx/Zx	=	-131.02	kN/sqm
My/Zy	=	1.04	kN/sqm
Deff	=	327	mm
Beff	=	1200	mm
SPu	=	573.22	kN/sqm
Mu	=	SPu X B X Loff X Loff / 2	
	=	73.57	kNm
Pt	=	0.138	%
Ast Rqd (BM)	=	540	sqmm
Ast Prv (Distributed Across Total Width)	=	7 - T10 @ 200	
	=	550	sqmm

Bottom Reinforcement Along B:

Critical Column No	=	C32	
Critical Analysis Load Combination	=	DConS10	
Critical Load Combination	=	[25] : 1.5 (Dead) +1.5 (SDL) -1.5 (EQ+Y)	
Pu	=	688.21	kN
Mux	=	-44.29	kNm
Muy	=	0.32	kNm
P/A	=	441.16	kN/sqm
Mx/Zx	=	-131.02	kN/sqm
My/Zy	=	1.04	kN/sqm
Deff	=	311	mm
Leff	=	1300	mm
SPu	=	573.22	kN/sqm
Mu	=	SPu X L X Boff X Boff / 2	

	=	75.45	kNm
Pt	=	0.145	%
Ast Rqd (BM)	=	585	sqmm
Ast Prv (Distributed Across Total Length)	=	8 - T10 @ 200	
	=	628	sqmm

Design For Shear:

One Way Shear Along L:

Critical Section @ d from Column Face

	=	327	mm
Critical Column No	=	C32	
Critical Analysis Load Combination	=	DConS10	
Critical Load Combination	=	[25] : 1.5 (Dead) +1.5 (SDL) -1.5 (EQ+Y)	
Pu	=	688.21	kN
Mux	=	-44.29	kNm
Muy	=	0.32	kNm
P/A	=	441.16	kN/sqm
Mx/Zx	=	-131.02	kN/sqm
My/Zy	=	1.04	kN/sqm
Deff	=	327	mm
Beff	=	1200	mm
SPu	=	573.22	kN/sqm
Vu	=	SPu X (Loff - d) X B	
	=	93.21	kN
Tv	=	Vu / (Beff X Deff)	
	=	0.24	N/sqmm
Tc	=	0.28	N/sqmm
Tv	<	Tc	

One Way Shear Along B:

Critical Section @ d from Column Face

	=	311	mm
Critical Column No	=	C32	
Critical Analysis Load Combination	=	DConS10	
Critical Load Combination	=	[25] : 1.5 (Dead) +1.5 (SDL) -1.5 (EQ+Y)	
Pu	=	688.21	kN
Mux	=	-44.29	kNm
Muy	=	0.32	kNm
P/A	=	441.16	kN/sqm

Mx/Zx	=	-131.02	kN/sqm
My/Zy	=	1.04	kN/sqm
Deff	=	311	mm
Leff	=	1300	mm
SPu	=	573.22	kN/sqm
Vu	=	SPu X (Boff - d) X L	
	=	103.58	kN
Tv	=	Vu / (Leff X Deff)	
	=	0.26	N/sqmm
Tc	=	0.29	N/sqmm
Tv	<	Tc	

Design For Punching Shear:

Critical Section @ d/2 from Column Face

	=	160	mm
Critical Column No	=	C30	
Critical Analysis Load Combination	=	DConS8	
Critical Load Combination	=	[23] : 1.5 (Dead) +1.5 (SDL) -1.5 (EQ+X)	
Pu	=	695.22	kN
Mux	=	0.65	kNm
Muy	=	-29.31	kNm
P/A	=	445.65	kN/sqm
Mx/Zx	=	1.93	kN/sqm
My/Zy	=	-93.94	kN/sqm
Deff	=	319	mm
Leff	=	694	mm
Beff	=	619	mm
Punching Perimeter	=	2626	mm
Punching Area	=	837694	sqmm
SPu	=	Max Pressure	
	=	541.53	kN/sqm
Vu	=	SPu X ((L X B)-(Leff X Beff))	
	=	612.15	kN
Tv	=	Vu / Punching Area	
	=	0.731	N/sqmm
Tc	=	1.25	N/sqmm
Tv	<	Tc	

Load Transfer Check For Load Transfer From Column To Footing

Critical Column No	=	C30	

Critical Analysis Load Combination	=	DConS8	
Critical Load Combination	=	[23] : 1.5 (Dead) +1.5 (SDL) -1.5 (EQ+X)	
Pu	=	695.22	kN
A2	=	0.11	sqm
A1	=	3.38	sqm
Base Area	=	1.56	sqm
A1	>	Base Area	
Thus, A1	=	1.56	
Modification Factor	=	SquareRoot(A1/A2) < = 2	
SquareRoot(A1/A2)	=	3.7659	
Thus, Modification Factor	=	2	
Concrete Bearing Capacity	=	0.45 X Fck X Modification Factor X Column Area	
	=	2531.25	kN
Concrete Bearing Capacity	>	Pu, Hence Safe.	

G.GUNA M.Tech (Structures).,AIV
Structural Engineer Grade-II(SE)
CMDA : SE / II / 2024 / 7 / 0275
DTCP : TVR / RSE-II / 2024 / 029
No.9/5, Sri Ragavendra Enclave
Mathavan Street, Pammal - 600 075.
Email: gconchennai@gmail.com
Ph: 09566 163232

10.2 COLUMN DESIGN

General Data

Column No.	:	C27	
Level	:	Base To GROUND FLOOR ROOF	
Frame Type	=	Non-Ductile	
Response Reduction Factor	=	3	
Design Code	=	IS 456 : 2000 + IS 13920 : 2016	
Grade Of Concrete	=	M25	N/sqmm
Grade Of Steel (Main)	=	Fe550	N/sqmm
Grade Of Steel (Shear)	=	Fe550	N/sqmm
Grade Of Steel - Flexural Design	=	Fe550	N/sqmm
Grade Of Steel - Shear Design	=	Fe415	N/sqmm
Column B	=	300	mm
Column D	=	375	mm
Clear Cover	=	40	mm
Clear Floor Height @ B	=	2700	mm
Clear Floor Height @ D	=	2625	mm
No Of Floors	=	2	
No Of Columns In Group	=	1	
Column Type	:	UnBraced	
Minimum eccentricity check	:	One Axis at a Time	
Code defined D/B ratio	:	4	
D/B Ratio	:	1.25 <= 4 Hence, Design as Column	

Flexural Design (Analysis Forces)

Analysis Reference No.	=	C27	
Critical Analysis Load Combination	:	DConS8	
Load Combination	=	[8] : 1.5 (Dead) +1.5 (SDL) -1.5 (EQ+X)	
Critical Location	=	Top Joint	
Pu	=	599.75	kN
Mux	=	-36.11	kNm
Muy	=	20.7	kNm
Vux	=	-19.63	kN
Vuy	=	20.05	kN

Effective Length Calculation

Calculation Along Major Axis Of Column

Joint	Column Stiffness	Beam Sizes		Beam Stiffness		Beta
		Beam 1 (Length x Width x Depth)	Beam 2 (Length x Width x Depth)	Beam 1	Beam 2	
	N-m x 10^6	mm	mm	N-m x 10^6	N-m x 10^6	
Bottom	43.945	No Beam	No Beam	-	-	0.928
Top	43.945	No Beam	11825 x 230 x 375	-	8.548	0.901

Sway Condition (as per Stability Index) = Sway

Effective Length Factor along Major Axis = 3.72

Calculation Along Minor Axis Of Column

Joint	Column Stiffness	Beam Sizes		Beam Stiffness		Beta
		Beam 1 (Length x Width x Depth)	Beam 2 (Length x Width x Depth)	Beam 1	Beam 2	
	N-m x 10^6	mm	mm	N-m x 10^6	N-m x 10^6	
Bottom	28.125	No Beam	No Beam	-	-	0.695
Top	28.125	3275 x 230 x 300	No Beam	15.802	-	0.721

Sway Condition (as per Stability Index) = Sway

Effective Length Factor along Minor axis = 1.98

Minimum Eccentricity Check

Since Axial Force is compressive, Min. Eccentricity check to be performed

Most critical case is with Min. Eccentricity check in X-direction

Minimum Eccentricity Along D:

Minimum Eccentricity = Unsupported Length / 500 + D / 30

= 17.75 mm

Mminx	=	Pu x Minimum Eccentricity	
	=	11.99	kNm

Slenderness Check

Max Slenderness Ratio(L/B)	=	9	
	<	60	(Hence Ok)
Column Is Unbraced Along D			
Slenderness Check Along D:			
Effective Length Factor	=	3.72	
Slenderness Ratio	=	Effective Length / D	
	=	26.04, Column Slender Along D	
Slenderness moment along D	=	(Pu D/ 2000) (Lex/D)^2	
	=	76.25 kNm	
Column Is Unbraced Along B			
Slenderness Check Along B:			
Effective Length Factor	=	1.98	
Slenderness Ratio	=	Effective Length / B	
	=	17.82, Column Slender Along B	
Slenderness moment along B	=	(Pu B/ 2000) (Ley/B)^2	
	=	28.57	kNm
Design slenderness moment along D			
Puz	=	2253.9	kN
Pd	=	639.33	kN
Reduction factor 'k' for slenderness moment	=	(Puz - Pu) / (Puz - Pd) < = 1	
	=	1.02 > = 1, Hence k=1	
Mslndx	=	k x 76.25	
	=	76.25	kNm
Design slenderness moment along B			
Puz	=	2253.9	kN
Pb	=	578.66	kN
Reduction factor 'k' for slenderness moment	=	(Puz - Pu) / (Puz - Pb) < = 1	
	=	0.99 < = 1, Hence k=0.99	
Mslndy	=	k x 28.57	
	=	28.21	kNm

Calculation of Design Moment

Direction	**Manalysis**	**Mmin** (Abs)	**Mdesign**	**Mslndx** (Abs)	**Mdesign-final**
	A	B	C	E	F
Major Axis - Mux	-36.11	11.99	-36.11	76.25	-112.36
Minor Axis - Muy	20.7	---	20.7	28.21	48.91

Where

A = Moments directly from analysis
B = Moments due to minimum eccentricity
C = Maximum of analysis moment and min. eccentricity = Max (A,B)
E = Moment due to slenderness effect
F = Final design Moment = Max(C- Top Bottom , D- Top Bottom) + E

Final Critical Design Forces

Pu	=	599.75	kN
Mux	=	-112.36	kNm
Muy	=	48.91	kNm

Resultant Moment (Combined Action)

Moment Capacity Check

Pt Calculated	=	2.19	
Reinforcement Provided	=	4-T20 + 6-T16	
Load Angle	=	Tan^{-1}(Muy/Mux)	
	=	23.52	deg
MRes	=	122.55	kNm
MCap	=	133.82	kNm
Capacity Ratio	=	MRes/ MCap	
	=	0.92 <= 1	

Shear Calculation	**Along D**	**Along B**
Critical Analysis Load Combination	DConS13	DConS11
Critical Load Combination	[13] : 0.9 (Dead) +0.9 (SDL) +1.5 (EQ+Y)	[11] : 0.9 (Dead) +0.9 (SDL) +1.5 (EQ+X)
Design shear force, Vu (kN)	22.968	14.7361
Pu (kN)	341.96	248.7
Deff , Beff (mm)	325	250
Aeff (sqmm)	97500	93750
Design shear stress, Tv	Vu / (B x Deff)	Vu / (D x Beff)
Tv (N/sqmm)	0.2356	0.1572
Pt (%)	1.095	1.095
Design shear strength, Tc (N/sqmm)	0.6633	0.6633
Shear Strength Enhancement Factor (Compressive Force)	1 + 3 x Pu / (B x D x Fck)	
	1.4209	1.3183
Shear Strength Enhancement Factor (Tensile Force)	-	-
Shear Strength Enhancement Factor (max)	1.5	1.5
Shear Strength Enhancement Factor	1.4209	1.3183

Enhanced shear strength, Tc-e (N/sqmm)	0.9424	0.8744
Design shear check	Tv < Tc x Enhancement factor	Tv < Tc x Enhancement factor
Shear Links Design	**Shear Links Not Required**	**Shear Links Not Required**

Design Of Links

Links in the zone where special confining links are not required

Normal Links

Diameter of link	=	8	mm
	>	Max. longitudinal bar dia / 4	
	=	5	mm
Criterion for spacing of normal links			
Min. Longitudinal Bar dia X 16	=	256	mm
Min. dimension of column	=	300	mm
Max. 300 mm	=	300	mm
Provided spacing	=	200	mm

Table For Links

	Required			Provided	
	Normal Design	**Shear Design**	**Ductile Design**	**Normal Zone**	**Ductile Zone**
Link Dia.	8	---	---	8	---
Spacing	200	---	---	200	---

General Data

Column No.	:	C27	
Level	:	GROUND FLOOR ROOF To TERRACE FLOOR	
Frame Type	=	Non-Ductile	
Response Reduction Factor	=	3	
Design Code	=	IS 456 : 2000 + IS 13920 : 2016	
Grade Of Concrete	=	M25	N/sqmm
Grade Of Steel (Main)	=	Fe550	N/sqmm
Grade Of Steel (Shear)	=	Fe550	N/sqmm
Grade Of Steel - Flexural Design	=	Fe550	N/sqmm
Grade Of Steel - Shear Design	=	Fe415	N/sqmm
Column B	=	230	mm
Column D	=	375	mm
Clear Cover	=	40	mm
Clear Floor Height @ B	=	2700	mm

Clear Floor Height @ D	=	2625	mm
No Of Floors	=	3	
No Of Columns In Group	=	1	
Column Type	:	UnBraced	
Minimum eccentricity check	:	One Axis at a Time	
Code defined D/B ratio	:	4	
D/B Ratio	:	1.63 <= 4 Hence, Design as Column	

Flexural Design (Analysis Forces)

Analysis Reference No.	=	C27	
Critical Analysis Load Combination	:	DConS8	
Load Combination	=	[8] : 1.5 (Dead) +1.5 (SDL) -1.5 (EQ+X)	
Critical Location	=	Bottom Joint	
Pu	=	437.37	kN
Mux	=	53.34	kNm
Muy	=	-19.73	kNm
Vux	=	-14.01	kN
Vuy	=	34.88	kN

Effective Length Calculation

Calculation Along Major Axis Of Column

Joint	Column Stiffness	Beam Sizes		Beam Stiffness		Beta
		Beam 1 (Length x Width x Depth)	Beam 2 (Length x Width x Depth)	Beam 1	Beam 2	
	N-m x 10^6	mm	mm	N-m x 10^6	N-m x 10^6	
Bottom	33.691	No Beam	11825 x 230 x 375	-	8.548	0.901
Top	33.691	No Beam	11825 x 230 x 375	-	8.548	0.887

Sway Condition (as per Stability Index)	=	Sway
Effective Length Factor along Major Axis	=	3.34

Calculation Along Minor Axis Of Column

Joint	Column Stiffness	Beam Sizes		Beam Stiffness		Beta
		Beam 1 (Length x Width x Depth)	Beam 2 (Length x Width x Depth)	Beam 1	Beam 2	
	N-m x 10^6	mm	mm	N-m x 10^6	N-m x 10^6	
Bottom	12.674	3275 x 230 x 300	No Beam	15.802	-	0.721
Top	12.674	3275 x 230 x 300	No Beam	15.802	-	0.616

Sway Condition (as per Stability Index)	=	Sway	
Effective Length Factor along Minor axis	=	1.86	

Minimum Eccentricity Check

Since Axial Force is compressive, Min. Eccentricity check to be performed

Most critical case is with Min. Eccentricity check in X-direction

Minimum Eccentricity Along D:

Minimum Eccentricity	=	Unsupported Length / 500 + D / 30	
	=	17.75	mm
Mminx	=	Pu x Minimum Eccentricity	
	=	8.75	kNm

Slenderness Check

Max Slenderness Ratio(L/B)	=	11.74	
	<	60	(Hence Ok)

Column Is Unbraced Along D

Slenderness Check Along D:

Effective Length Factor	=	3.34	
Slenderness Ratio	=	Effective Length / D	
	=	23.38, Column Slender Along D	
Slenderness moment along D	=	(Pu D/ 2000) (Lex/D)^2	
	=	44.83 kNm	

Column Is Unbraced Along B

Slenderness Check Along B:

Effective Length Factor	=	1.86	
Slenderness Ratio	=	Effective Length / B	
	=	21.83, Column Slender Along B	
Slenderness moment along B	=	(Pu B/ 2000) (Ley/B)^2	
	=	23.98	kNm

Design slenderness moment along D

Puz	=	1978.77	kN
Pd	=	529.18	kN
Reduction factor 'k' for slenderness moment	=	(Puz - Pu) / (Puz - Pd) < = 1	
	=	1.06 > = 1, Hence k=1	
Mslndx	=	k x 44.83	
	=	44.83	kNm

Design slenderness moment along B

Puz	=	1978.77	kN
Pb	=	370.17	kN
Reduction factor 'k' for slenderness moment	=	(Puz - Pu) / (Puz - Pb) < = 1	
	=	0.96 < = 1, Hence k=0.96	
Mslndy	=	k x 23.98	

	=	22.98	kNm

Calculation of Design Moment

Direction	Manalysis	Mmin (Abs)	Mdesign	Mslndx (Abs)	Mdesign-final
	A	B	C	E	F
Major Axis - Mux	53.34	8.75	53.34	44.83	98.17
Minor Axis - Muy	-19.73	---	-19.73	22.98	-42.71

Where

A = Moments directly from analysis

B = Moments due to minimum eccentricity

C = Maximum of analysis moment and min. eccentricity = Max (A,B)

E = Moment due to slenderness effect

F = Final design Moment = Max(C- Top Bottom , D- Top Bottom) + E

Final Critical Design Forces

Pu	=	437.37	kN
Mux	=	98.17	kNm
Muy	=	-42.71	kNm

Resultant Moment (Combined Action)

Moment Capacity Check

Pt Calculated	=	2.91	
Reinforcement Provided	=	8-T20	
Load Angle	=	Tan^{-1}(Muy/Mux)	
	=	23.51	deg
MRes	=	107.06	kNm
MCap	=	107.42	kNm
Capacity Ratio	=	MRes/ MCap	
	=	1 <= 1	

Shear Calculation	Along D	Along B
Critical Analysis Load Combination	DConS9	DConS8
Critical Load Combination	[9] : 1.5 (Dead) +1.5 (SDL) +1.5 (EQ+Y)	[8] : 1.5 (Dead) +1.5 (SDL) -1.5 (EQ+X)
Design shear force, Vu (kN)	40.1608	-11.8497
Pu (kN)	90.08	95.57
Deff , Beff (mm)	325	180
Aeff (sqmm)	74750	67500
Design shear stress, Tv	Vu / (B x Deff)	Vu / (D x Beff)

Tv (N/sqmm)	0.5373	0.1756
Pt (%)	1.457	1.457
Design shear strength, Tc (N/sqmm)	0.7348	0.7348
Shear Strength Enhancement Factor (Compressive Force)	1 + 3 x Pu / (B x D x Fck)	
	1.1446	1.1699
Shear Strength Enhancement Factor (Tensile Force)	-	-
Shear Strength Enhancement Factor (max)	1.5	1.5
Shear Strength Enhancement Factor	1.1446	1.1699
Enhanced shear strength, Tc-e (N/sqmm)	0.8411	0.8597
Design shear check	Tv < Tc x Enhancement factor	Tv < Tc x Enhancement factor
Shear Links Design	**Shear Links Not Required**	**Shear Links Not Required**

G.GUNA M.Tech (Structures).,AIV
Structural Engineer Grade-II(SE)
CMDA : SE / II / 2024 / 7 / 0275
DTCP : TVR / RSE-II / 2024 / 029
No.9/5, Sri Ragavendra Enclave
Mathavan Street, Pammal - 600 075.
Email: gconchennai@gmail.com
Ph: 09566 163232

Design Of Links

Links in the zone where special confining links are not required

Normal Links

Diameter of link = 8 mm

> Max. longitudinal bar dia / 4

= 5 mm

Criterion for spacing of normal links

Min. Longitudinal Bar dia X 16 = 320 mm

Min. dimension of column = 230 mm

Max. 300 mm = 300 mm

Provided spacing = 200 mm

Table For Links

	Required			Provided	
	Normal Design	**Shear Design**	**Ductile Design**	**Normal Zone**	**Ductile Zone**
Link Dia.	8	---	---	8	---
Spacing	200	---	---	200	

10.3 BEAM DESIGN:

Group	:	**G1**	
Beam No	:	**B1**	
Analysis Reference (Member)	:	B62 (FIRST FLOOR ROOF)	
Beam Length	:	2860	mm
Breadth (B)	:	230	mm
Depth (D)	:	300	mm
Effective Depth (d)	:	265	mm
Design Code	:	IS 456	
Beam Type	:	Regular Beam	
Grade Of Concrete (Fck)	:	M25	N/sqmm
Grade Of Steel (Main)	:	Fe550	N/sqmm
Grade Of Steel (Shear)	:	Fe550	N/sqmm
Top/Bottom Clear Cover (Cmin)	:	25	mm
Side Clear Cover	:	25	mm
Es	:	2x10^5	N/sqmm
Ptnominal (%) (Bn)	:	0.2	%

G.GUNA M.Tech (Structures).,AIV
Structural Engineer Grade-II(SE)
CMDA : SE / II / 2024 / 7 / 0275
DTCP : TVR / RSE-II / 2024 / 029
No.9/5, Sri Ragavendra Enclave
Mathavan Street, Pammal - 600 075.
Email: gconchennai@gmail.com
Ph: 09566 163232

Flexure Design

	Beam Bottom			Beam Top		
	Left	**Mid**	**Right**	**Left**	**Mid**	**Right**
Critical L/C - Analysis	DConS11	DConS7	DConS12	DConS8	DConS12	DConS7
Critical L/C - RCDC	11	7	12	8	12	7
Mu (kNm)	11.96	10.91	12.7	25.56	9.61	22.75
Tu (kNm)	0	0	0	0.17	0.12	0
M_{Tu} (kNm)	0	0	0	0.23	0.16	0
Mud (kNm)	11.96	10.91	12.7	25.79	9.77	22.75
MuLim (kNm)	53	53	53	53	53	53
R	0.74	0.676	0.786	1.597	0.605	1.408
Ptmin (%) (A)	0.2	0.2	0.2	0.2	0.2	0.2
Ptclc (%) (B')	0.2	0.2	0.2	0.363	0.2	0.316
Pcclc (%) (C)	0	0	0	0	0	0
PtPrv (%)	0.387	0.387	0.387	0.66	0.66	1.611
AstCalc (sqmm)	121.9	121.9	121.9	221.12	121.9	192.9
AstPrv (sqmm)	235.62	235.62	235.62	402.12	402.12	981.74
Reinforcement Provided	3-T10	3-T10	3-T10	2-T16	2-T16	2-T25

Note: Calculation of Ast

AstCalc = Max {B',C} x B X d (for Mu > 0)
AstCalc = Bn x B X d (for Mu = 0)
Where,

A	=	Ptmin	=	Min % area of flexural reinforcement
B'	=	Ptclc	=	Maximum of % reinforcement required for Bending Moment and Min % area of flexural reinforcement (A)
Bn	=	Ptnominal	=	Nominal % area of reinforcement
C	=	Pcclc	=	% area of compression reinforcement required
D	=	AstCrack	=	Area of reinforcement required for Crackwidth

Shear Design			
	Left	**Mid**	**Right**
Critical L/C - Analysis	DConS8	DConS7	DConS7
Critical L/C - RCDC	8	7	7
PtPrv (%)	0.66	0.66	1.611
Vu (kN)	39.02	22.78	33.58
Tu (kNm)	0.17	0	0
V_{Tu} (kN)	1.17	0	0
Vut (kN)	40.19	22.78	33.58
Tv (N/sqmm)	0.66	0.37	0.55
Tc (N/sqmm)	0.55	0.55	0.76
Vc (kN)	33.31	33.31	46.37
Vus=Vut-Vc (kN)	6.88	0	0
Legs	2	2	2
Stirrup Rebar	8	8	8
Asv Torsion (sqmm)	196.845	-	-
Asv Torsion Prv (sqmm)	1005.4	-	-
Asv Reqd (sqmm/m)	254.81	254.81	254.81
SvCalc (mm)	100	175	175
SvPrv (mm)	100	175	175
Asv Total Prv (sqmm)	1005.4	574.51	574.51

Maximum Spacing Criteria

Basic

Spc1 =0.75d	= 199	mm
Spc2	= 300	mm

For Torsion

(X1 = 190, Y1 = 260)

Spc3 = X1	= 190	mm
Spc4=(X1+Y1)/4	= 100	mm

SFR Design

Beam Width	= 230	mm
Beam Depth	= 300	mm
Web Depth	= 300 <= 750	mm
Side Face Reinforcement not required.		

Group	:	**G1**	
Beam No	:	**B2**	
Analysis Reference (Member)	:	B63 (FIRST FLOOR ROOF)	
Beam Length	:	5362	mm
Breadth (B)	:	230	mm
Depth (D)	:	450	mm
Effective Depth (d)	:	415	mm
Design Code	:	IS 456	
Beam Type	:	Regular Beam	
Grade Of Concrete (Fck)	:	M25	N/sqmm
Grade Of Steel (Main)	:	Fe550	N/sqmm
Grade Of Steel (Shear)	:	Fe550	N/sqmm
Top/Bottom Clear Cover (Cmin)	:	25	mm
Side Clear Cover	:	25	mm
Es	:	2x10^5	N/sqmm
Ptnominal (%) (Bn)	:	0.2	%

Flexure Design						
	Beam Bottom			Beam Top		
	Left	Mid	Right	Left	Mid	Right
Critical L/C - Analysis	DConS7	DConS2	DConS8	DConS8	DConS12	DConS7
Critical L/C - RCDC	7	2	8	8	12	7
Mu (kNm)	21.04	58.92	25.83	118.47	4.75	101.5
Tu (kNm)	0.15	0	0.11	0.14	0.17	0.21
M_{Tu} (kNm)	0.26	0	0.19	0.24	0.3	0.37
Mud (kNm)	21.3	58.92	26.02	118.71	5.05	101.87
MuLim (kNm)	129	129	129	129	129	129
R	0.538	1.487	0.657	2.997	0.128	2.572
Ptmin (%) (A)	0.2	0.2	0.2	0.2	0.2	0.2
Ptclc (%) (B')	0.2	0.336	0.2	0.751	0.2	0.623
Pcclc (%) (C)	0	0	0	0	0	0
PtPrv (%)	0.355	0.355	0.355	1.029	0.421	0.658
AstCalc (sqmm)	190.9	320.5	190.9	716.86	190.9	594.98
AstPrv (sqmm)	339.3	339.3	339.3	981.74	402.12	628.32
Reinforcement Provided	3-T12	3-T12	3-T12	2-T25	2-T16	2-T20

Note: Calculation of Ast

AstCalc = Max {B',C} x B X d (for Mu > 0)
AstCalc = Bn x B X d (for Mu = 0)
Where,

A	=	Ptmin	=	Min % area of flexural reinforcement
B'	=	Ptclc	=	Maximum of % reinforcement required for Bending Moment and Min % area of flexural reinforcement (A)
Bn	=	Ptnominal	=	Nominal % area of reinforcement
C	=	Pcclc	=	% area of compression reinforcement required
D	=	AstCrack	=	Area of reinforcement required for Crackwidth

Shear Design			
	Left	**Mid**	**Right**
Critical L/C - Analysis	DConS8	DConS7	DConS7
Critical L/C - RCDC	8	7	7
PtPrv (%)	1.029	0.355	0.658
Vu (kN)	122.16	44.69	104.69
Tu (kNm)	0.14	0.19	0.21
V_{Tu} (kN)	0.97	1.32	1.46
Vut (kN)	123.13	46.01	106.16
Tv (N/sqmm)	1.29	0.48	1.11
Tc (N/sqmm)	0.65	0.42	0.55
Vc (kN)	61.87	40.49	52.12
Vus=Vut-Vc (kN)	61.26	5.52	54.04
Legs	2	2	2
Stirrup Rebar	8	8	8
Asv Torsion (sqmm)	367.533	137.297	314.821
Asv Torsion Prv (sqmm)	670.27	670.27	670.27
Asv Reqd (sqmm/m)	408.83	254.81	360.62
SvCalc (mm)	150	150	150
SvPrv (mm)	150	150	150
Asv Total Prv (sqmm)	670.27	670.27	670.27

Maximum Spacing Criteria

Basic

Spc1 =0.75d	= 311	mm
Spc2	= 300	mm

For Torsion

(X1 = 190, Y1 = 410)

Spc3 = X1	= 190	mm
Spc4=(X1+Y1)/4	= 150	mm

SFR Design

Beam Width	= 230	mm
Beam Depth	= 450	mm
Web Depth	= 450 <= 750	mm

Side Face Reinforcement not required.

G.GUNA M.Tech (Structures).,AIV
Structural Engineer Grade-II(SE)
CMDA : SE / II / 2024 / 7 / 0275
DTCP : TVR / RSE-II / 2024 / 029
No.9/5, Sri Ragavendra Enclave
Mathavan Street, Pammal - 600 075.
Email: gconchennai@gmail.com
Ph: 09566 163232

THE LANDLENS SUITE

Eight ways to know a piece of land before you pay for it.

This report covers one part of the picture. These cover the rest, drawn from the same government records, for any property in Tamil Nadu.

LandLens One
Ask anything about a property and get an answer grounded in live government records, with the sources shown.
/landlens/one

Verify My Land
Every record check run on one property and returned as a single report.
/landlens/verify-my-land

Legal Opinion
An advocate's written opinion on the title, built on the records we pull for it.
/landlens

One Map
Every layer on one map: the parcel, its boundary, zoning, water bodies and what sits around it.
/landlens/one/map

PriceMap
What land actually changed hands for around this plot, taken from the registered deeds.
/landlens/pricemap

Build Scope
What you are allowed to build here: floor space, height, coverage and setbacks.
/landlens/build-scope

Property Tracker
Watch a property and hear about it when something new is registered against it.
/landlens/property-tracker

Deal Room
Run the transaction in one place: documents, stamping, signatures and the parties.
/landlens/deal-room

FREE TOOLS · NO ACCOUNT NEEDED

Twenty-four checks you can run yourself, at no cost.

Records and verification

The registers themselves, read for you.

- Encumbrance Certificate
- Patta and Chitta
- Field Measurement Sketch
- EC Analyzer
- Bank charge check
- Court case search
- Seller background check
- Approval check by survey

Value and duty

What it is worth and what it costs to register.

- Guideline value by street
- Guideline value by survey
- Stamp duty and registration fees
- Capital gains
- Floor space index
- Area unit converter

Zoning and land use

What the plan says can happen on this land.

- Land use zone finder
- CMDA land use check
- Coastal regulation zone
- Master plan check
- Water bodies finder
- Airport height clearance

Registers and directories

Who holds it, and which office keeps the record.

- Find your registering office
- Temple property check
- Waqf property check
- RERA register

Every free tool
/tools

Services we run for you
/services

The LandLens suite
/landlens/one

Verified RealEstate™

Every claim in this document traces back to a government record.

- Legal opinions, due diligence and title verification
- Building plan, layout and sub-division approvals
- Completion and occupancy certificates, regularisation
- Escrow, negotiation and NRI property management
- Land survey, soil testing, architecture and construction

Verified RealEstate
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India
hello@verified.realestate
+91 9996 12 9996

Prepared from the registers named on the page each finding sits on. Where a register could not be read, this document says so in its place rather than leaving the gap to be read as a clean result.