Verified RealEstate™

Your trusted partner for buying, selling, and managing property, ensuring hassle-free service with 100% transparency.

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996

Official Property Record

Digitally Verified Record - Powered by Verified RealEstate™



REPORT

ON

SOIL INVESTIGATION FOR CONSTRUCTION OF RESIDENTIAL APARTMENT BUILDING AT SBI OFFICERS COLONY EXTENSION ROAD, TRICHY

Client

Mr. R. Rajagopal Thondaiman,
Represented by its Power Agent,
M/s. Royal Shelter,
T.S. No. 1/1Apt, Block: 5,
T.S. No. 5/11, Block: 1, Ward: AB,
SBI Officers Colony Extension Road,
Golden Rock Zone,
Tiruchirappalli Corporation.

By

Time

TIME INSTITUTE FOR MATERIALS TESTING
NO. 25, SANJEEVI NAGAR,
TRICHY - CHENNAI BYEPASS ROAD,
TIRUCHIRAPPALLI,
TAMIL NADU - 620 002.
PH: 0431 2401326

JUNE 2023

For ROYAL SHELTER

Managing Partner
Power Agent

SUMMARY

Project	:	Construction of Residential Apartment Building at SBI Officers Colony Extension Road, Trichy
Project Reference	:	Time /49/ Soil Test / June 2023
Owner	:	Mr. R. Rajagopal Thondaiman, Represented by its Power Agent, M/s. Royal Shelter, T.S. No. 1/1Apt, Block: 5, T.S. No. 5/11, Block: 1, Ward: AB, SBI Officers Colony Extension Road, Golden Rock Zone, Tiruchirappalli Corporation.
Type of Structure	:	R.C.C. Framed construction
Location	:	SBI Officers Colony Extension Road, Trichy
Scope	:	Geotechnical investigation for the entire area of construction
Test conducted	:	Two explanatory bore holes up to 4.5m depth was made and conducted standard penetration tests at every 1.5m depth. The undisturbed soil samples were collected at every 1.5m depth for laboratory test.

FINDINGS

Soil at shallow depth	:	Gravels exist up to 1.5m depth
Hard stratum	:	Soft rock exists from 1.5m to 4.5m depth
Ground water table	:	Ground water was not encountered during the investigation up to 4.5m depth.

FOUNDATION : Based on the existing soil condition, it is recommended to provide foundation at 3m depth.

ROYAL SHELTER

Managing Partner
Power Agent

CONTENTS

1. INTRODUCTION ON SOIL TEST

1.1 – Introduction - 1
1.2 – Investigation Programme, Procedure and Data - 2
1.3 – Review of Field and Laboratory Results - 3
1.4 – Conclusions & Recommendation - 4

2. SOIL PROFILES

2.1 – Plan of Bore Hole 1 & 2 - 5
2.2 – Bore log details for Bore Hole 1 & 2 - 6
2.4 – Summary of Engineering Geo Properties for Bore hole 1 & 2 - 8
2.5 – Summary of Laboratory test results for Bore Hole 1 & 2 - 11
2.6 – Shear Parameters for different layers of Bore Hole 1 & 2 - 12

3. SIEVE ANALYSIS REPORT

3.1 – Sieve Analysis report of sample from Borehole No 1 & 2 - 13

4. CALCULATION OF SAFE BEARING CAPACITY OF THE SOIL

4.1 – Safe bearing capacity calculation based on settlement and Shear - 15
4.2 – Safe Bearing capacity of soil based on SPT values - 19
4.3 – Safe Bearing capacity of soil based on Shear Failure Criteria Through Direct Shear test - 20
4.4 – Comparison of safe bearing capacity of soil Through shear and settlement - 21

5. RESULT

5.1 – Recommended safe bearing capacity values at different depths - 22

6. SOIL SAMPLE PHOTOS

7. SITE PHOTOS

ANNEXURE

For ROYAL SHELTER

Managing Partner
Power Agent

SOIL INVESTIGATION

For ROYAL SHELTER

Managing Partner
Power Agent

AMERICAN GLOBAL STANDARDS
A A0 BAR
ACCREDITED
ISO - 17025:2005

Time Institute for Materials Testing
टाइम इन्स्टिट्यूट चीज़े शोध केलिए

Quality is Excellence

B.N. Krishnaswami, M.E., (Struct. Engg.), Ph.D., Soil & Structural Consultant, Construction Materials Testing Lab
Former Faculty, NIT, Trichy

June 23, 2023

To

Mr. R. Rajagopal Thondaiman,
Represented by its Power Agent,
M/s. Royal Shelter,
T.S. No. 1/1Apt, Block: 5,
T.S. No. 5/11, Block: 1, Ward: AB,
SBI Officers Colony Extension Road,
Golden Rock Zone,
Tiruchirappalli Corporation.

REPORT ON SOIL INVESTIGATION

(Ref: TIME/49/ SOIL TEST/ JUNE 2023)

Sub: Soil Investigation for construction of Residential Apartment Building at SBI Officers Colony Extension Road, Trichy – reg.,

Ref: Based on letter dated: 20.06.2023

1.1 Introduction:

It is proposed to construct a **Residential Apartment Building at SBI Officers Colony Extension Road, Trichy.** A detailed soil investigation was suggested for estimating the safe bearing capacity of the soil, so that suitable type of foundation can be decided for the proposed structure. Time Institute for Materials Testing (TIME) has been requested to undertake the soil investigation at the proposed site. The study was carried out by TIME on **21.06.2023.** This report presents complete investigation data and discusses the results to recommend the bearing capacity values at different depths for the proposed structure.

Section 2 describes the soil profile and bore log details of two exploratory bore hole. Section 3 of this report gives the Grain size distribution curves and its analysis. Section 4 of this report presents the calculated safe Bearing capacity values of soil at various depths. Section 5 of this report reviews the test results and the recommended safe bearing capacity values for design of foundation. Section 6 of this report presents the Soil sample photos. Section 7 of this report presents site photo.

25, Sanjeevi Nagar, Trichy – Chennai Byepass Road, Trichy - 620 002. Tel : + 91 431 2401326, Fax : + 91 431 2401596
Mob : + 91 94433 27936. Email: tmaterialstesting@yahoo.co.in Web: www.timeinstitute.net

For ROYAL SHELTER

Managing Partner
Power Agent

1.2 Investigation Programme, Procedure and Data:

Investigation was carried out in two location at the site through exploratory bore hole. Soil samples were collected from bore hole at different depths for conducting laboratory test. Standard Penetration test was conducted at regular intervals and 'N' values were recorded. Undisturbed soil samples were collected and were preserved and transported to the laboratory for detailed identification tests. Based on the field and laboratory tests on the samples collected, the results are furnished in this report.

An exploratory bore hole was advanced from the existing ground level using truck mounted rotary drilling techniques supplemented by Betonies mud circulation. This drilling procedure with mud circulation is found most suitable for making exploratory bore hole. The mud circulation was employed through the drill rods and letting it out though the side jets provided in the cutting tool thus preventing any disturbance at the bore hole bottom. Mud circulation was used to stabilize the sides and the bottom of the bore hole, and then to bring the soil cuts to the surface. It is important to note that the mud jet is not used to cut the soils as in the case of wash boring technique. Use of drilling mud will also help in preventing the disturbance to the soil at the bore hole bottom during drilling operations. Diameter of the bore hole is about 150mm.

Bore hole was always kept full with the drilling mud so that a positive head is maintained in the bore hole thus preventing any disturbance to the soil within the test zone.

The field tests included Standard penetration test, Disturbed and undisturbed soil sampling, identification of different soil layers, Ground water table observation, complete logging of the bore hole, etc.

Laboratory investigation consisted of classification tests like grain size distribution analysis, determination of specific gravity etc. Unconfined Compression test and Direct shear was conducted on preserved soil samples. All the field and laboratory tests were conducted according to the procedures stipulated in relevant IS codes.

For ROYAL SHELTER

Managing Partner
Power Agent

1.3 Review of Field and Laboratory Results:

Sub soil Profile

The original ground level in the presently investigated area was plain terrain.

Bore Hole 1:

The soil below the existing ground level is clay. This layer is extended up to 0.2m depth. Clay with sand mixed exists from 0.2m to 0.5m depth. Gravels exist from 0.5m to 1.5m depth. Below which soft rock exists from 1.5m to 4.5m depth from the existing ground level. The soil stratification and its variation under present investigation are available in bore log details. The 'N' value is progressively increasing towards depth, due to the soil stratification.

Bore Hole 2:

The soil below the existing ground level is clay. This layer is extended up to 0.2m depth. Clay with sand mixed exists from 0.2m to 0.5m depth. Gravels exist from 0.5m to 1.5m depth. Below which soft rock exists from 1.5m to 4.5m depth from the existing ground level. The soil stratification and its variation under present investigation are available in bore log details. The 'N' value is progressively increasing towards depth, due to the soil stratification.

Ground Water Table

Ground water table was not encountered during the soil investigation up to 4.5m depth from the ground level.

Shear Strength

Standard Penetration test blow counts 'N' is measured at different levels in the bore hole. Mainly these 'N' values are used to assess the shear strength of different soil layers.

Cohesive layers: The classification of 'N' values in moderate to high plasticity medium clay deposits developed by Terzaghi is used for estimating the unconfined compression strength and untrained shear strength of clay and sandy clay layers. The consistency between the N values and the liquidity index values is reviewed while assigning undrained shear strength for soft to medium clay layers.

For ROYAL SHELTER

Managing Partner
Power Agent

Non - Cohesive Layers: The sand layers towards depth are of residual type and suitable modifications are made to take care of the presence of plastic fines in the residual soil. Conventional method of estimating the angle of shearing resistance ϕ corresponding to the relative density and the grain size distribution as per the classification suggested by Peck and suitably modified by the R.K. Hough to account for the influence of grain size distribution is adopted here.

1.4 Conclusions & Recommendations:

Shear strength parameters and compressibility parameters of different soil layers are established from the field and laboratory tests.

Based on the existing soil condition, it is recommended to provide foundation at 3m depth.

For Time Institute for Materials Testing

B.N. Krishnaswami

23rd June 2023 **Dr. B.N. Krishnaswami.**

For ROYAL SHELTER

Managing Partner
Power Agent

BORE LOG DETAILS

For ROYALSHELTER

Managing Partner
Power Agent

2.2 BORE LOG DETAILS FOR BORE HOLE 1

Project : Report on soil investigation for construction of Residential Apartment Building

Location : SBI Officers Colony Extension Road, Trichy

Started on : 21.06.2023 **Ended on** : 21.06.2023

Depth of G.W.T : Nil

Type of Boring : Calyx drilling

Site Level : Below 1.5m from the road level

Lithology of Bore Hole			SPT Data					Graphical representation of penetration Resistance ('N' Value)
Depth below G.L. (m)	Profile	Soil Description	Depth of SPT (m)	0-15cm	15-30cm	30-45cm	N Value	0 20 40 60 80
0 - 0.2m		Clay						
0.2m - 0.5m		Clay with sand mixed						
0.5m - 1.5m		Gravels	1.5	Rebound			50	
1.5m - 4.5m		Soft rock	3.0	Rebound			57	
			4.5	Rebound			59	

Bore terminated at 4.5m depth from the existing ground level

For ROYALSHELTER

Managing Partner
Power Agent

2.3 BORE LOG DETAILS FOR BORE HOLE 2

Project : Report on soil investigation for construction of Residential Apartment Building

Location : SBI Officers Colony Extension Road, Trichy

Started on : 21.06.2023 **Ended on** : 21.06.2023

Depth of G.W.T : Nil

Type of Boring : Calyx drilling

Site Level : Below 1.5m from the road level

Lithology of Bore Hole			SPT Data					Graphical representation of penetration Resistance ('N' Value)
Depth below G.L. (m)	Profile	Soil Description	Depth of SPT (m)	0-15cm	15-30cm	30-45cm	N Value	0 20 40 60 80
0 - 0.25m		Clay						
0.25m - 1m		Clay with sand mixed						
1m - 1.5m		Gravels	1.5	Rebound			51	
1.5m - 4.5m		Soft rock	3.0	Rebound			58	
			4.5	Rebound			60	

Bore terminated at 4.5m depth from the existing ground level

For ROYAL SHELTER
Managing Partner
Power Agent

2.4 Summary of Engineering Geo Properties

Natural Moisture Content:

The natural water content also called the natural moisture content is the ratio of the weight of water to the weight of the solids in a given mass of soil. This ratio is usually expressed as percentage.

$$W = [(W2-W3)/(W3-W1)] \times 100$$

Where,

W_1 = Weight of container gm

W_2 = Weight of container +wet soil gm

W_3 = Weight of container +dry soil

Bulk Density:

The total, or wet, density of soil, $_t$, is the ratio of the total mass of soil to its total volume and can be defined as follows:

$$\gamma_{bulk} = M / V$$

Where

M_t = Total Mass of soil

V_t = Total Volume

Dry Density:

The soil dry density, $_b$, is the ratio of the mass of the solid phase of the soil (i.e., dried soil) to its total volume (solid and pore volumes together) and is defined as follows:

$$\gamma_{dry} = M_b / V_b$$

Where

M_b = Total Mass of dried soil

V_b = Total Volume

For ROYALSHELTER

Managing Partner
Power Agent

Specific gravity:

Specific gravity is the ratio of the weight of a given volume of a material at a standard temperature to the weight of an equal volume of distilled water at the same stated temperature.

$$\text{The specific gravity G of the soil} = (W_2 - W_1) / [(W_4 - W_1)-(W_3-W_2)]$$

Where

W_1 = Weight of density bottle
W_2 = Weight of density bottle + dry soil
W_3 = Weight of bottle + dry soil + water at temperature
W_4 = Weight of density bottle + Water

Void Ratio:

Soil void ratio (e) is the ratio of the volume of voids to the volume of solids:

$$e = (Vv) / (Vs)$$

Where
Vv is the volume of the voids (empty or filled with fluid),
Vs is the volume of solids.

Porosity:

Soil porosity (η) , which is defined as the ratio of the volume of voids to the total volume of the soil.
The porosity and the void ratio are inter-related as follows:

$$\eta = (1 - (\gamma_d/G_s))*100$$

$$e = \eta/(1-\eta) \;\&\; \eta = e / (1+e)$$

Where
γ_d = Dry Density
G_s = Specific gravity

For ROYALSHELTER
Managing Partner
Power Agent

Summary of Engineering Geo Properties for Bore Holes 1 & 2

Bore hole No.	Depth (m)	Soil Description	Natural Moisture Content (%)	Bulk Density (gm/cc)	Dry Density (gm/cc)	Specific gravity	Porosity (%)	Void Ratio
Bore Hole 1	1.5	Gravels	9.07	2.04	1.87	2.66	30	0.42
	3.0	Soft Rock	4.59	2.10	2.01	2.70	26	0.34
	4.5		4.16	2.12	2.04	2.70	25	0.33
Bore Hole 2	1.5	Gravels	8.85	2.05	1.88	2.66	29	0.41
	3.0	Soft Rock	4.10	2.11	2.03	2.70	25	0.33
	4.5		3.77	2.13	2.05	2.70	24	0.32

For ROYALSHELTER
Managing Partner
Power Agent

2.5 Summary of Laboratory Test Results for Bore Holes 1 & 2

Bore hole No.	Depth (m)	Soil Description	Gravel (%)	Coarse sand (%)	Medium Sand (%)	Fine sand (%)	Silt (%)	Clay (%)
Bore Hole 1	1.5	Gravels	56.3	27.8	13.2	2.7	0.0	0.0
Bore Hole 2	1.5	Gravels	58.7	29.4	9.8	2.1	0.0	0.0

For ROYAL SHELTER
Managing Partner
Power Agent

2.6 Shear Strength Parameters for Different layers of Bore Holes 1 & 2

Bore Hole No.	Depth below G.L. (m)	Soil Description	N	Shear Strength 'Ø' (in degrees)
Bore Hole 1	1.5	Gravels	50	37.20
	3.0	Soft Rock	57	39.23
	4.5		59	39.62
Bore Hole 2	1.5	Gravels	51	37.41
	3.0	Soft Rock	58	39.43
	4.5		60	39.82

For ROYALSHELTER

Managing Partner
Power Agent

GRAIN SIZE ANALYSIS


For ROYAL SHELTER

Managing Partner
Power Agent

3.1 TEST REPORT ON SIEVE ANALYSIS OF SAMPLE

Bore Hole – 1 @ 1.5m

SIEVE SIZE	PERCENTAGE OF PASSING
	1.5m Depth
10 mm	100
4.75 mm	43.7
2.36 mm	29.5
1.18 mm	15.9
600 micron	8.6
300 micron	2.7
150 micron	0
75 micron	0

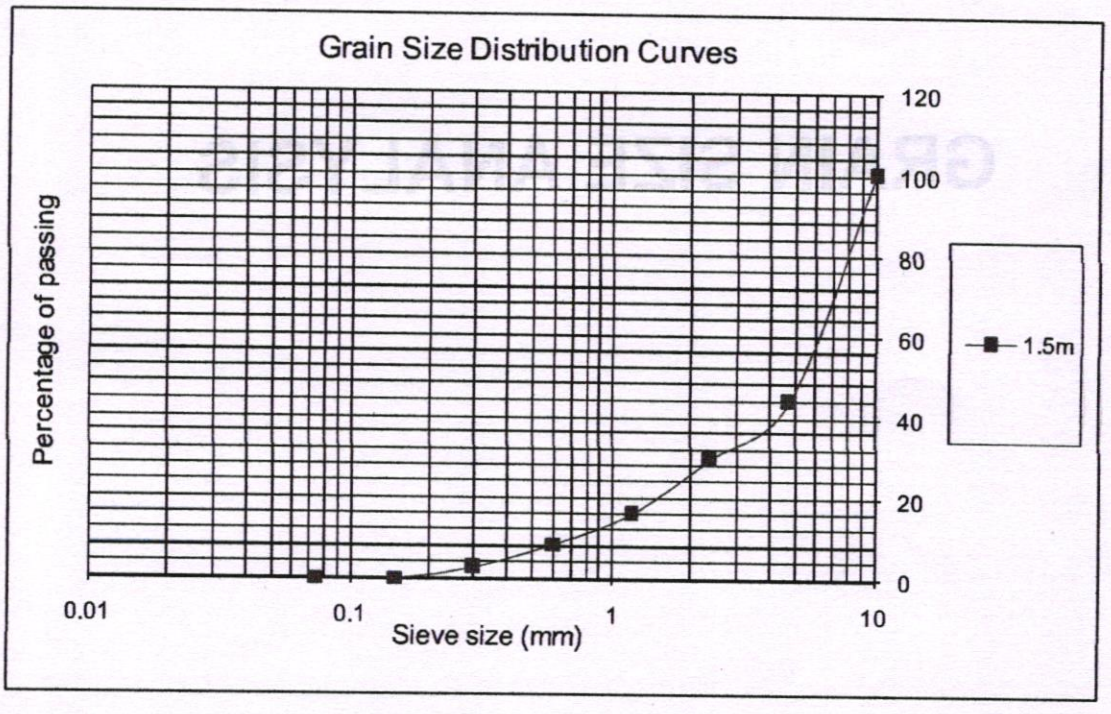

Description	1.5m Depth
Fineness modulus	4.996

Observation:

The inference from the graph shows that the gravels exist at 1.5m depth.


For ROYAL SHELTER

Managing Partner
Power Agent

3.2 TEST REPORT ON SIEVE ANALYSIS OF SAMPLE

Bore Hole – 2 @ 1.5m

SIEVE SIZE	PERCENTAGE OF PASSING
	1.5m Depth
10 mm	100
4.75 mm	41.3
2.36 mm	26.2
1.18 mm	11.9
600 micron	6.7
300 micron	2.1
150 micron	0
75 micron	0

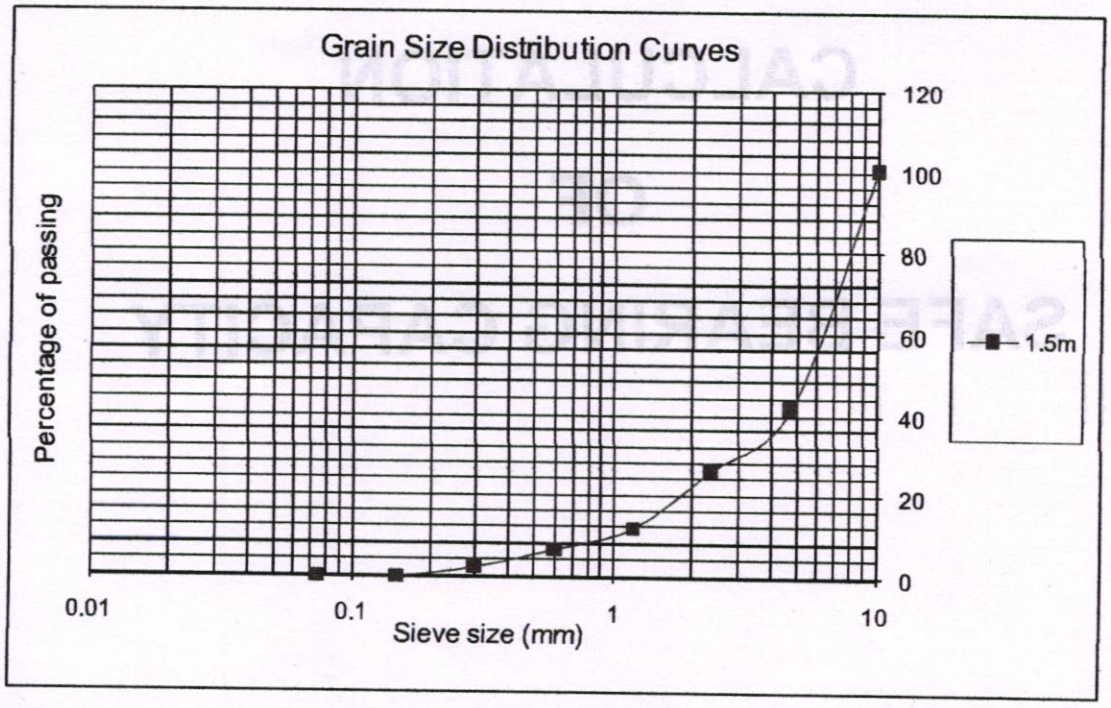

Description	1.5m Depth
Fineness modulus	5.118

Observation:

The inference from the graph shows that the gravels exist at 1.5m depth.

For ROYAL SHELTER

Managing Partner
Power Agent

CALCULATION
OF
SAFE BEARING CAPACITY

For ROYAL SHELTER

Managing Partner
Power Agent

4. CALCULATION OF SAFE BEARING CAPACITY

4.1 Safe bearing capacity calculation based on settlement and Shear

Safe Bearing Capacity calculations based on settlement consideration (SPT value):

Safe Bearing Capacity calculations for shallow foundation will vary based on the width of foundation.

For example, in the case of Individual footing such as isolated, combined etc., we are supposed to use the formula as mentioned below. (Using Teng's Modified formula)

$$q_{na} = 51.4 \times (N-3) \times \left(\frac{B+0.3}{2B}\right)^2 \times R_w \times C_d$$

Where,

q_{na}	=	Net safe bearing capacity of soil (kN/m²) (for 2.5cm permissible settlement)
N	=	Corrected SPT values
B	=	Width of foundation (m) (let us assume 2m)
R_w	=	Correction factor for water table level
C_d	=	Correction factor for depth of embedment

For Bore Hole 1 @ 1.5m depth SPT 'N' Value = 50

⇒ **q_{na} = 51.4 x (50 - 3) x ((2 + 0.3)/(2 x 2))² x 0.5 x 1 = 399.35 kN/m²**

∴ **q_{na} = 39.93 t/m²**

For ROYAL SHELTER

Managing Partner
Power Agent

Safe Bearing Capacity calculations based on shear consideration (Direct Shear):

As Per IS 6403:1981

At 1.5m depth (Bore Hole 1)

Proving Ring capacity 200kg = 966.2 division

Area of the shear box = 6cm x 6cm = 36cm²

Normal Stress (kg/cm²)	No. of Division	Stress
0.5	23	0.132
1.0	90	0.517
1.5	155	0.891

Stress = Load / Area

= (200/966.2) * 23* (1/36) = 0.132

Ø = $\tan^{-1}$ (0.891-0.132) = 37.20°

Net safe bearing capacity of the soil (for general shear failure as per IS 6403:1981)

$$q_{ult} = C N_c S_c d_c i_c + q (N_q - 1) S_q d_q i_q + 0.5 B \gamma N_\gamma S_\gamma d_\gamma i_\gamma W'$$

Where

C	=	Cohesion in t/m²
N_c, Nq, N_γ	=	Bearing Capacity Factors (From Table 1 of IS 6403 – 1981)
S_c, S_q, S_γ	=	Shape Factors (From Table 2 of IS 6403 – 1981)
d_c, d_q, d_γ	=	Depth Factors
i_c, i_q, i_γ	=	Inclination Factors
q	=	Effective surcharge at the base level of foundation in t/m²
B	=	Width of footing, diameter of circular footing in m
γ	=	Bulk unit weight of soil in t/m³
W'	=	Correction factor for location of water table

At 1.5m depth (Bore hole 1), the Soil profile is Gravels

If	C	=	0 (Since no Cohesion)
	Φ	=	37.20° (based on laboratory test)
Therefore	N_c	=	58.952;
	N_q	=	46.884;
	N_γ	=	75.013

for ROYAL SHELTER

Managing Partner
Power Agent

Applying these parameters in the above equation

$$q_{ult} = C N_c S_c d_c i_c + q (N_q - 1) S_q d_q i_q + 0.5 B \gamma N_\gamma S_\gamma d_\gamma i_\gamma W'$$

Where C = **0 (Since no Cohesion)**

Therefore, $q_{ult} = q (N_q - 1) S_q d_q i_q + 0.5 B \gamma N_\gamma S_\gamma d_\gamma i_\gamma W'$

Bearing Capacity calculation through shear density of soil 'γ'

There are two relationships of weight of soil to Volume of soil as

i) Total density or Bulk density

ii) Dry density

Therefore, Total Bulk density, $\gamma_t = \frac{\text{Total Weight of soil}}{\text{Total Volume of soil}} = \frac{W}{V}$.

Dry Density $\gamma_d = W_s/V$; Whereas W_s = Total weight of solids

In a particular case the **total density** will be known as **saturated density**, when the soil is saturated. Another density of soil will be known as submerged or buoyant density, γ_b when the soil is submerged in water.

$$\gamma_b = \gamma_t - \gamma_w$$

Where γ_w = Density of water = 1 g/cc or 1 t/m³

Mostly soils submerged in water are saturated.

Hence $\gamma_{buoyant} = \gamma_{sat} - \gamma_w$

Based on the above equations,

$\gamma = \gamma_{sat} = 1.8$ t/m³

$d = 1.5$m

Here, $\gamma_b = \gamma_{sat} - 1 = 1.8 - 1 = 0.8$ t/m³

Therefore, $q = \gamma_b \times d = 0.8 \times 1.5 = 1.2$ t/m²

For ROYAL SHELTER

Managing Partner
Power Agent

$S_q = S_\gamma$ = Shape factor which is equal to 1

$d_q = d_\gamma$ = $1 + 0.1\frac{df}{B}\sqrt{N\emptyset}$

= 1 (Minimum value of 1 can be taken)

i_q = inclination factor $(1 - \alpha/90)^2$

Where α = inclination of the load to the vertical in degree which is equal to zero

i_q = 1

B = Width of footing (2m)

W' = 0.5

Applying in the above equation

q_{ult} = $q\ (Nq - 1)\ S_q\ d_q\ i_q + 0.5\ B\ \gamma\ N_\gamma\ S_\gamma\ d_\gamma\ i_\gamma\ W'$

= $1.2 \times (46.884 - 1) \times 1 \times 1 \times 1 + 0.5 \times 2 \times 1.8 \times 75.013 \times 1 \times 1 \times 1 \times 0.5$

= 122.57 t/m²

Applying factor of safety as 3

Then allowable bearing capacity

q_{na} = 122.57 / 3

= 40.86 t/m²

For ROYAL SHELTER

Managing Partner
Power Agent

SAFE BEARING CAPACITY RESULTS

For ROYAL SHELTER

Managing Partner
Power Agent

4. Calculation of Safe bearing capacity of the soil:

4.2 Safe Bearing capacity of soil based on SPT values for Bore Holes 1 & 2

Bore Hole No.	Depth (m)	SPT value	Safe Bearing capacity of soil	
			KN/m²	t/m²
	1.50	50	399.35	39.93
	3.00	57	458.83	45.88
	4.50	59	475.83	47.58

BH – 2	1.50	51	407.85	40.78
	3.00	58	467.33	46.73
	4.50	60	484.32	48.43

For ROYAL SHELTER

Managing Partner
Power Agent

4.3 Safe Bearing capacity of soil based on Shear Failure Criteria:

Through Direct Shear test

Bore Hole No.	Depth (m)	Normal Stress (kg/cm²)	Division	Ø (in degrees)	Safe Bearing Capacity of Soil (t/m²)
BH – 1	1.50	0.5 1.0 1.5	23 90 155	37.20°	40.86
	3.00	0.5 1.0 1.5	24 96 166	39.23°	76.75
	4.50	0.5 1.0 1.5	24 97 168	39.62°	104.49
BH – 2	1.50	0.5 1.0 1.5	23 91 156	37.41°	42.14
	3.00	0.5 1.0 1.5	24 96 167	39.43°	78.45
	4.50	0.5 1.0 1.5	24 98 169	39.82°	106.66

For ROYAL SHELTER

Managing Partner
Power Agent

4.4 Comparison of Safe bearing capacity of soil through Shear and Settlement consideration:

Bore Hole no.	Depth (m)	Safe Bearing Capacity (t/m²)	
		Shear consideration (Direct Shear)	Settlement consideration
BH – 1	1.50	40.86	39.93
	3.00	76.75	45.88
	4.50	104.49	47.58
BH – 2	1.50	42.14	40.78
	3.00	78.45	46.73
	4.50	106.66	48.43

For ROYAL SHELTER
Managing Partner
Power Agent

5. Result:

5.1 Recommended Safe bearing capacity values at different depths

Considering the lesser value of the above, the Safe Bearing Capacity, values at different depths are recommended below:

Bore Hole	Depth (m)	Safe Bearing Capacity (t/m²)
BH – 1	1.50	39.93
	3.00	45.88
	4.50	47.58
BH – 2	1.50	40.78
	3.00	46.73
	4.50	48.43

The above test data and findings are relevant and applicable only for the soil conditions existing at the test site. Any change in the soil strata observed during excavation may be reported to the laboratory, which will redefine the safe bearing capacity of the soil.

For ROYALSHELTER

Managing Partner
Power Agent

SOIL & ROCK SAMPLE PHOTOS

For ROYAL SHELTER

Managing Partner
Power Agent

0



4.5m


Bore Hole No: 1

Depth : 0 to 4.5m

For ROYALSHELTER

Managing Partner
Power Agent

0

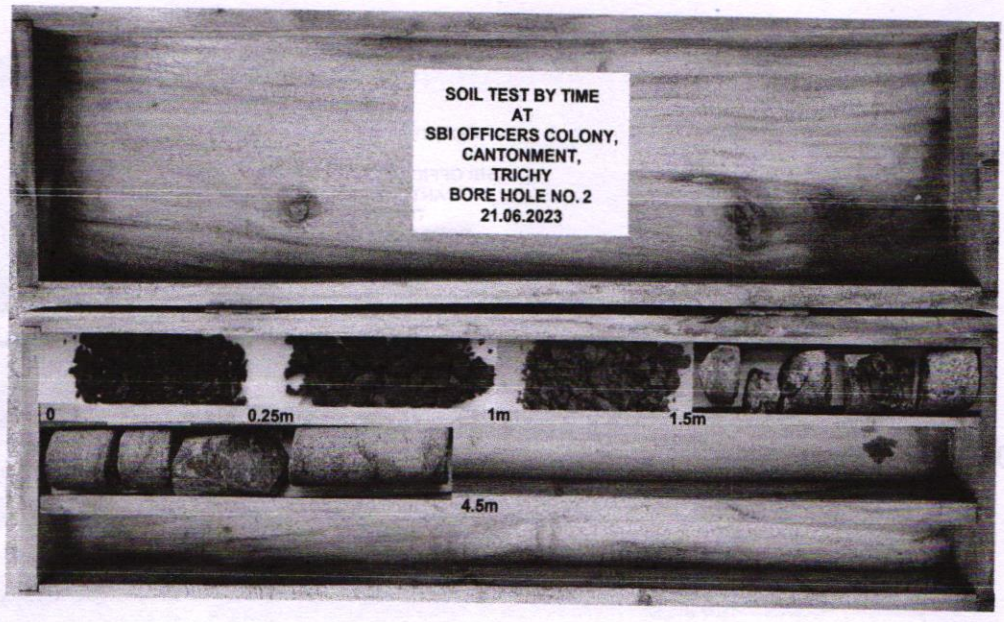

4.5m

Bore Hole No: 2

Depth : 0 to 4.5m

For ROYAL SHELTER

Managing Partner
Power Agent

SITE PHOTO

For ROYALSHELTER

Managing Partner
Power Agent



SBI Officers Colony Extension Road, Trichy

For ROYAL SHELTER

Managing Partner
Power Agent

ANNEXURE

For ROYAL SHELTER

Managing Partner
Power Agent

Time Institute for Materials Testing
Soil Division,
#25, Sanjeevi Nagar,
Trichy- Chennai Byepass road, Trichy - 620 002.
Phone: 0431 2401326
Fax: 0431 2401596
Email: tmaterialstesting@yahoo.co.in

Annexure - A

NATURAL MOISTURE CONTENT
(As per IS 2720 (Part - 2) - 1973)

Project Name : **Report on soil investigation for construction of Residential Apartment Building at SBI Officers Colony Extension Road, Trichy**

Bore Hole No. : **1**

Depth : **1.5m**

Trial	Wt of container (W) gm	Wt of container +wet soil (W_1) gm	Wt of container + Dry soil (W_2) gm	Wt of Water ($W_3 = W_1-W_2$) gm	Wt of Dry Soil ($W_4 = W_2-W$) gm	Water Content (%) = (W_3-W_4)*100
1	23.60	57.40	54.60	2.8	31.0	9.03
2	19.60	53.20	50.40	2.8	30.8	9.09
3	25.10	55.10	52.60	2.5	27.5	9.09

Natural Moisture Content = 9.07

For ROYAL SHELTER

Managing Partner
Power Agent

Time Institute for Materials Testing
Soil Division,
#25, Sanjeevi Nagar,
Trichy- Chennai Byepass road, Trichy - 620 002.
Phone: 0431 2401326
Fax: 0431 2401596
Email: tmaterialstesting@yahoo.co.in

Annexure - B

SPECIFIC GRAVITY TEST
(As per IS 2720 (Part - 3) - 1980)

Project Name : **Report on soil investigation for construction of Residential Apartment Building at SBI Officers Colony Extension Road, Trichy**

Bore Hole No. : **1**

Depth : **1.5m**

Trial	Bottle Wt (W1) gm	Bottle + Sample (W2) gm	Bottle + Sample + Water (W3) gm	Bottle + Water (W4) gm	Specific Gravity
1	32.6	91.8	117.8	80.8	2.667
2	32.6	92.4	118.1	80.8	2.658
3	32.6	91.3	117.5	80.8	2.668

Specific gravity of Fine Aggregate = 2.66

For ROYAL SHELTER

Managing Partner
Power Agent

Time Institute for Materials Testing
Soil Division,
#25, Sanjeevi Nagar,
Trichy- Chennai Byepass road, Trichy - 620 002.
Phone: 0431 2401326
Fax: 0431 2401596
Email: tmaterialstesting@yahoo.co.in

Annexure - C

DENSITY CALCULATION

Project Name : **Report on soil investigation for construction of Residential Apartment Building at SBI Officers Colony Extension Road, Trichy**

Bore Hole No. : **1**

Depth : **1.5m**

Sl. No.	Description	Reading
1	Weight of Empty Box (gm)	630.00
2	Weight of Box + Soil (gm)	813.50
3	Weight of Soil (gm)	183.50
4	Volume of Box (cm^3)	90.00
5	**Bulk Density (gm/cm^3)**	**2.04**
6	Weight of Container (gm)	23.60
7	Weight of Container + Wet Soil (gm)	57.40
8	Weight of Container + Dry Soil (gm)	54.60
9	Moisture Content (%)	9.03
10	**Dry Density (gm/cm^3)**	**1.87**

Result

Bulk Density of Soil = 2.04

Dry Density of Soil = 1.87

For ROYAL SHELTER

Managing Partner
Power Agent

Time Institute for Materials Testing
Soil Division,
#25, Sanjeevi Nagar,
Trichy- Chennai Byepass road, Trichy - 620 002.
Phone: 0431 2401326
Fax: 0431 2401596
Email: tmaterialstesting@yahoo.co.in

Annexure - D

POROSITY & VOID RATIO

Project Name : **Report on soil investigation for construction of Residential Apartment Building at SBI Officers Colony Extension Road, Trichy**

Bore Hole No. : **1**

Depth : **1.5m**

Sl. No.	Description	Reading
1	Dry Density γ_d (gm/cm^3)	1.87
2	Specific gravity (G_s)	2.66
	Porosity (%)	(1 – (γd/Gs))*100
		(1-(1.87/2.66)) x 100 = 29.69
3	**Porosity (%)**	**30**
	Void Ratio, (e)	η/(1-η)
		0.2969/(1-0.2969)
4	**Void Ratio**	**0.42**

for ROYAL SHELTER

Managing Partner
Power Agent

Time Institute for Materials Testing
Soil Division,
#25, Sanjeevi Nagar,
Trichy - Chennai Byepass Road, Trichy - 620 002.
Phone: 0431 2401326
Fax: 0431 2401596
Email: tmaterialstesting@yahoo.co.in

Annexure - E

FINENESS MODULUS TEST


(As per IS 2720 (Part - 4) - 1985)

Project Name : **Report on soil investigation for construction of Residential Apartment Building at SBI Officers Colony, Cantonment, Trichy**

Bore Hole No. : **1**

Depth : **1.5m**

Sieve size (mm)	Weight retained	Cumulative Weight retained (gm)	Percentage cumulative weight retained (gm)	Percentage of passing
10	0	0.0	0.0	100.0
4.75	56.3	56.3	56.3	43.7
2.36	14.2	70.5	70.5	29.5
1.18	13.6	84.1	84.1	15.9
0.6	7.3	91.4	91.4	8.6
0.3	5.9	97.3	97.3	2.7
0.15	2.7	100.0	100.0	0.0
0.075	0	100.0	100.0	0.0
Pan	0	100.0	100.0	0.0

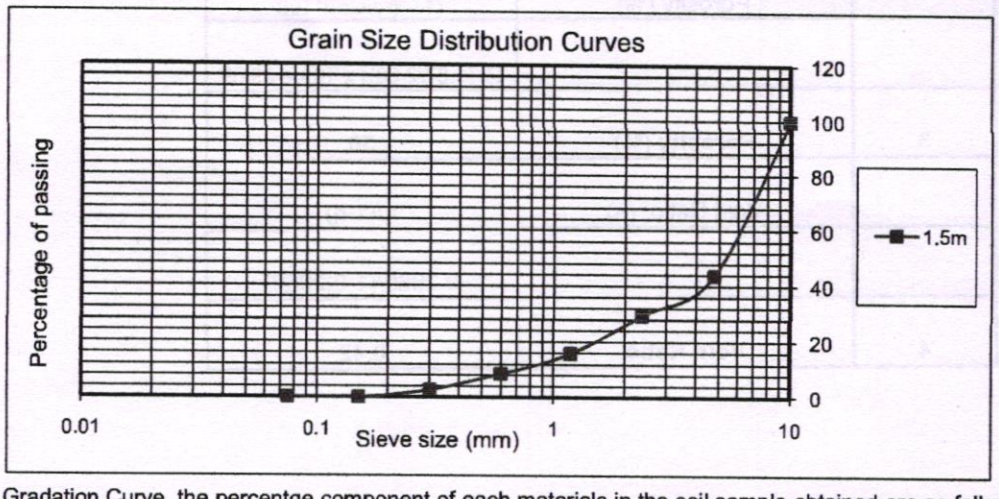

Based on Gradation Curve, the percentge component of each materials in the soil sample obtained are as follows (As per IS 1498 - 1970).

Gravel (%)	56.3
Coarse Sand (%)	27.8
Medium Sand (%)	13.2
Fine sand (%)	2.7
Silt & Clay (%)	0.0

For ROYAL SHELTER

Managing Partner
Power Agent

Time Institute for Materials Testing
Soil Division,
#25, Sanjeevi Nagar,
Trichy- Chennai Byepass road, Trichy - 620 002.
Phone: 0431 2401326
Fax: 0431 2401596
Email: tmaterialstesting@yahoo.co.in

Annexure - F

Direct Shear Test (IS 2720 - Part 13 -1986)

Bore Hole	1
Depth (m)	1.5m
Date of Test	22.06.2023

L.C. Of Dial Gauge	0.002
Proving ring Constant	0.206996
Area of the specimen (cm^2)	36

Trial 1

Normal Stress: 0.5 kg/cm^2

Horizontal Gauge Reading	Proving Ring Reading	Shear Deformation	Shear Stress (kg/cm^2)
0	0	0.00	0.000
50	9	0.50	0.052
100	11	1.00	0.063
150	13	1.50	0.075
200	15	2.00	0.086
250	17	2.50	0.098
300	19	3.00	0.109
350	21	3.50	0.121
400	23	4.00	0.132

Trial 2


Normal Stress: 1 kg/cm^2

Horizontal Gauge Reading	Proving Ring Reading	Shear Deformation	Shear Stress (kg/cm^2)
0	0	0.00	0.000
50	41	0.50	0.236
100	46	1.00	0.264
150	50	1.50	0.287
200	55	2.00	0.316
250	60	2.50	0.345
300	66	3.00	0.379
350	70	3.50	0.402
400	75	4.00	0.431
450	80	4.50	0.460
500	84	5.00	0.483
550	90	5.50	0.517


Trial 3

Normal Stress: 1.5 kg/cm^2

Horizontal Gauge Reading	Proving Ring Reading	Shear Deformation	Shear Stress (kg/cm^2)
0	0	0.00	0.000
50	97	0.50	0.558
100	101	1.00	0.581
150	106	1.50	0.609
200	110	2.00	0.632
250	114	2.50	0.655
300	118	3.00	0.678
350	121	3.50	0.696
400	125	4.00	0.719
450	131	4.50	0.753
500	136	5.00	0.782
550	141	5.50	0.811
600	145	6.00	0.834
650	150	6.50	0.862
700	155	7.00	0.891

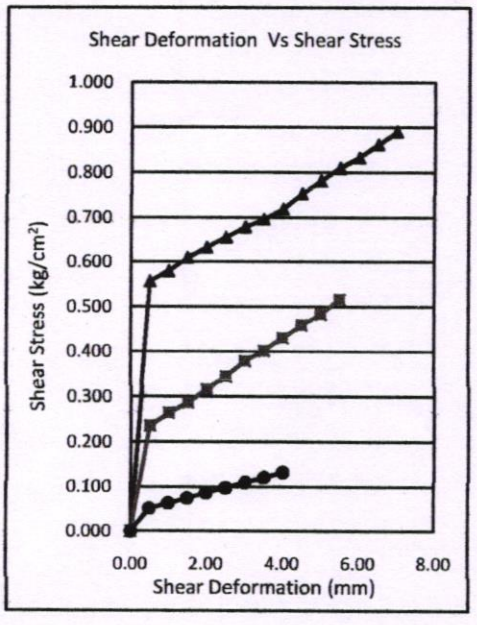

Normal Stress (Kg/cm^2)	Proving Ring Reading at failure	Shear Stress (kg/cm^2)
0.50	23	0.132
1.00	90	0.517
1.50	155	0.891

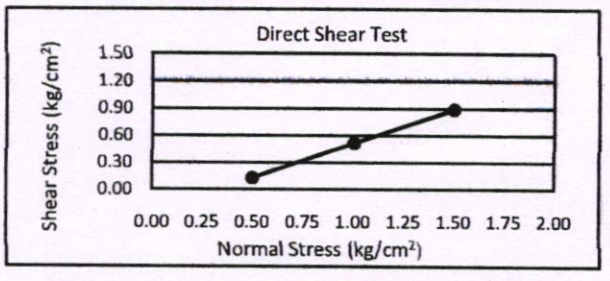

Ø = $\tan^{-1}$ (0.891 - 0.132)

Angle of Shearing Resistance (Ø) = 37.20 °

For ROYAL SHELTER

Managing Partner
Power Agent



our services doesn't just end there

Buying & Selling Services

Property Buying Assistance, Property Selling Support, Market Price Analysis, Owner Outreach and Negotiation.

Legal & Documentation Services

Certified EC, Patta, legal opinions, property verification, due diligence, litigation solutions, and legal heir certificates.

Property Development & Approvals

Building plan approvals, construction, layout and sub-division approvals, zone conversion, and occupancy certification.

NRI & Investment Services

Escrow Services, Rentals, Litigation Solutions, Property Valuation and Property Management

Compliance & Special Services

Demolition, Vaasthu checks, regularization of unauthorized buildings, and office space solutions.



empowering your real estate decisions with smart tools

Property Valuation & Cost Estimation

Guideline Value, Apartment Composite Value, Stamp Duty & Registration Fees Calculator, Building Value Calculator, Capital Gains Calculator, Area Unit Converter, Length Unit Converter

Ownership, Compliance & Legal Verification

Encumbrance Certificate (EC) Search, Find Your SRO, Temple Property Check, WAQF Property Check, View Patta/Chitta, View FMB, Patta Analyzer, EC Analyzer

Zoning & Land Use Analysis

Land Use Zone Finder, CRZ Zone Check, Aquifer Zone Check, CBA Check, EWS Check, Road Width Check, Proposed Road Widening Check, FSI Calculator

Property Documentation & Workflow Tools

Forms & Templates, Document Generator, Document Translation, Dictionary

Vastu & Property Management Tools

Home Vastu Shastra, Plot Vastu Shastra, Property Management

Verified RealEstate™

We're honored to be part of your real estate journey

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996
www.verified.realestate