Verified RealEstate™

Your trusted partner for buying, selling, and managing property, ensuring hassle-free service with 100% transparency.

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996

**Official Property Record**

Digitally Verified Record - Powered by Verified RealEstate™



| | | | |
|---|---|---|---|
| **CONSULTANTS** | | **GEO MINES ENGINEERS PVT. LTD.**<br>**GEOTECHNICAL ENGINEERING DIVISION,**<br>**No. 96, 3RD FLOOR, VELLALAR STREET,**<br>**MOGAPPAIR WEST, CHENNAI-37**<br>**Ph. No. 98413 16631, 9840157478**<br>**Email: geomines@gmail.com, gmepl77@gmail.com**<br>**Website: www.geominesengineers.com** | |
| **CLIENT** | | **SREEROSH PROPERTIES (P) LTD., CHENNAI** | |
| **PROJECT** | | **PROPOSED CONSTRUCTION OF RESIDENTIAL BUILDING (STILT+05, 02 BLOCKS) AT NEW NO: 64/270, ROYAPETTAH HIGH ROAD, ROYAPETTAH, CHENNAI-600014** | |
| **TITLE** | | **GEOTECHNICAL INVESTIGATION REPORT** | |
| | | Dr. R. Venkata Krishnaiah M.E., Ph.D.,<br>Geotechnical Expert<br>Regd. No. GTE/19/07/032<br>No. 7/4, Munavar Avenue,<br>4th Street, Pallavaram, Chennai -43 | |
| | | For Geo Mines Engineers Pvt Ltd<br>Director | GEOMINES ENGINEERS (P) LTD. GMEPL Chennai |
| **0** | **18-03-2024** | **GMEPL/SREEROSH PROPERTIES (P) LTD/602/2023-24** | |
| **REV.** | **DATE** | **REPORT NUMBER** | **PREP. BY** |

## DISCLAIMER

We've been asked to look into the ground and identify and quantify everything that mother nature has put thereand predict how those materials will react to construction and long-term performance of a facility - and we may fall short of this lofty goal.

We have made reasonable and prudent conclusions but a cloud of uncertainty inherently looms over the project as per the pre and post facilities laid and their elemental behaviour on the mother soil.

Also, the variable nature of soil strata and it's varying characteristics may make the recommended foundation system disqualify and hence it's recommended that special care shall be taken by the owner during and after the construction is complete and during the run period of the building.

GEOMINES ENGINEERS (P) LTD. GMEPL Chennai

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

# CONTENTS


| | SEC. NO. | | PAGE NO. |
|---|---|---|---|
| | | REPORT COVER PAGE | I |
| | | CONTENTS | I |
| | | | |
| **CHAPTER-1** | | **INTRODUCTION** | |
| | 1.0 | Preamble | 1 |
| | 1.1 | Scope of Work | 1 |
| | 1.2 | Structure of the Report | 1 |
| | | | |
| **CHAPTER-2** | | **INVESTIGATION METHODOLOGY & TEST RESULTS** | |
| | 2.0 | Field Testing | 2 |
| | 2.1 | Preamble | 2 |
| | 2.2 | Equipment Used and Method of Drilling | 2 |
| | 2.2.1 | Equipment Used | 2 |
| | 2.2.2 | Method of Drilling | 2 |
| | 2.3 | In-situ Strength Tests | 2 |
| | 2.3.1 | Standard Penetration Tests | 2 |
| | 2.4 | Collection of Samples | 2 |
| | 2.4.1 | Disturbed Soil Samples | 2 |
| | 2.4.2 | Ground Water | 3 |
| | 2.5 | Summary of Field Work | 3 |
| | 2.6 | Laboratory Testing | 3 |
| | 2.6.1 | Coarse Grained Soil Samples | 3 |
| | 2.6.1.1 | Grain Size Analysis Tests | 3 |
| | 2.6.2 | Fine Grained Soil Samples | 3 |
| | 2.6.2.1 | Index Property & Free Swell Tests | 3 |
| | 2.6.3 | Chemical Analysis Tests | 3 |
| | 2.6.3.1 | Water Samples | 3 |
| | | | |
| **FIGURES** | 2.0 | Site Plan representing the locations of Field investigation points | 4 |
| | 2.1 | Soil Profile at BH-01 Location | 5 |
| | 2.2 | Soil Profile at BH-02 Location | 6 |
| | 2.3 | Soil Profile at BH-03 Location | 7 |
| | | | |
| **TABLES** | 2.1 | Laboratory Test Results on the Soil Samples collected from BH-01 Location | 8 |
| | 2.2 | Laboratory Test Results on the Soil Samples collected from BH-02 Location | 9 |
| | 2.3 | Laboratory Test Results on the Soil Samples collected from BH-03 Location | 10 |
| | 2.4 | Chemical Analysis Test Results on the Water Samples collected from borehole Locations | 11 |
| | | | |
| **CHAPTER-3** | | **SUB-SURFACE STRATIFICATION** | |
| | 3.0 | Preamble | 12 |


Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai-43

| | | | |
|---|---|---|---|
| | 3.1 | Sub surface Stratification | 12 |
| | 3.1.1 | Soil Profile at BH-01 Location | 12-13 |
| | 3.1.2 | Soil Profile at BH-02 Location | 14-15 |
| | 3.1.3 | Soil Profile at BH-03 Location | 15-17 |
| | | | |
| **CHAPTER-4** | | **FOUNDATION SYSTEM** | |
| | 4.0 | Preamble | 18 |
| | 4.1 | Bearing Strata Characteristics | 18 |
| | 4.2 | Foundation System | 18 |
| | 4.2.1 | Deep Foundation System-19.50m long Bored Cast-in-Situ Friction cum End Bearing Piles | 18-19 |
| | | | |
| **CHAPTER-5** | | **RECOMMENDATIONS** | 20-21 |
| | | | |
| **ANNEXURE** | | Design of Deep Foundation System (Refer. BH-03) | 22-25 |
| | | Sample Computations for Lateral Load Carrying Capacity of Piles | 26-28 |


Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

# CHAPTER-1

# INTRODUCTION

## 1.0 Preamble

**Sreerosh Properties (P) Ltd., Chennai** proposed to construct a **Residential Building (Stilt+05, 02 Blocks) at New No: 64/270, Royapettah High Road, Royapettah, Chennai-600014.**

For the purpose of designing the foundations, the responsibility of carrying out suitable soil investigation was entrusted to M/s. Geo Mines ENGINEERS Pvt. Ltd., Chennai.

This report contains the field and laboratory test results along with Design computations and recommendations for suitable foundation systems.

## 1.1 Scope of Work

- Sinking Three Standard Soil investigation bore holes of 150mm diameter up to a depth of 20.00m below existing ground level as directed by the engineer-in-charge.
- Conducting Standard Penetration Test (SPT) at regular depth intervals.
- Collection of Split Spoon Samples or Disturbed Soil Samples
- Collection of water samples from each bore hole.
- Conducting relevant laboratory test results.

## 1.2 Structure of the Report

- Contents
- Introduction
- Investigation Methodology & Test Results
- Figures & Tables
- Sub-Surface Stratification
- Foundation Systems
- Recommendations
- Annexure (Design Computations)

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

# CHAPTER-2

# INVESTIGATION METHODOLOGY & TEST RESULTS

## 2.0 Field Testing:

## 2.1 Preamble:

Three standard soil investigation boreholes were put. The equipment used and the methodology adopted to carry out the fieldwork is described below.

## 2.2 Equipment Used and Method of Drilling:

### 2.2.1 Equipment Used

The equipment used for performing the drilling operations was a Calyx Rotary Drill Rig with direct mud circulation technique. The drill mud used was made out of Sodium Bentonite.

### 2.2.2 Methodology of drilling

In the soil strata, the drilling operations were carried out using special drill bits and cutters coupled with direct mud circulation.

## 2.3 In-Situ Strength Tests:

### 2.3.1 Standard Penetration Test:

Standard penetration tests were conducted at the borehole locations, in accordance with IS: 2131. The tests were conducted at every change of strata up to the depth of termination of the borehole as directed by the engineer-in-charge.

## 2.4. Collection of Samples:

### 2.4.1 Disturbed Soil Samples

The SPT-samples collected were used as disturbed soil samples. These samples were used for visual and physical identification and for conducting laboratory classification tests as per I.S.1498-1970.

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

### 2.4.2 Ground Water

For conducting suitable chemical tests, the ground water samples were collected from the respective boreholes.

## 2.5 Summary of Field Work

The locations of the boreholes are shown in site plan given in Fig. 2.0. The soil profiles obtained at each location is shown in Figs. 2.1 to 2.3.

## 2.6 Laboratory Testing:

### 2.6.1 Coarse Grained Samples:

#### 2.6.1.1 Grain size Analysis Tests:

On the coarse-grained soil samples, grain size distribution tests were conducted as per I.S.2720 (Part 4)-1985, to know the gradation characteristics and to classify them. These results are presented in Tables 2.1 to 2.3.

### 2.6.2 Fine Grained Samples:

#### 2.6.2.1 Index Property – Free Swell Tests:

Atterberg Limits were carried out on fine grained soil samples to evaluate the limits of different consistency states. Generally Liquid limits, Plastic limits and Shrinkage Limits tests were conducted as per I.S.2720 (Part-5)-1985 and I.S.2720 (Part 6)-1972. On such type of soil strata encountered at the investigation locations, such tests were conducted and the test results are presented in Tables 2.1 to 2.3.

### 2.6.3 Chemical Analysis Tests:

#### 2.6.3.1 Water Samples:

On representative water samples, chemical analysis tests were conducted to estimate pH, Chlorides and Sulphates. These results are presented in Table-2.4.

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

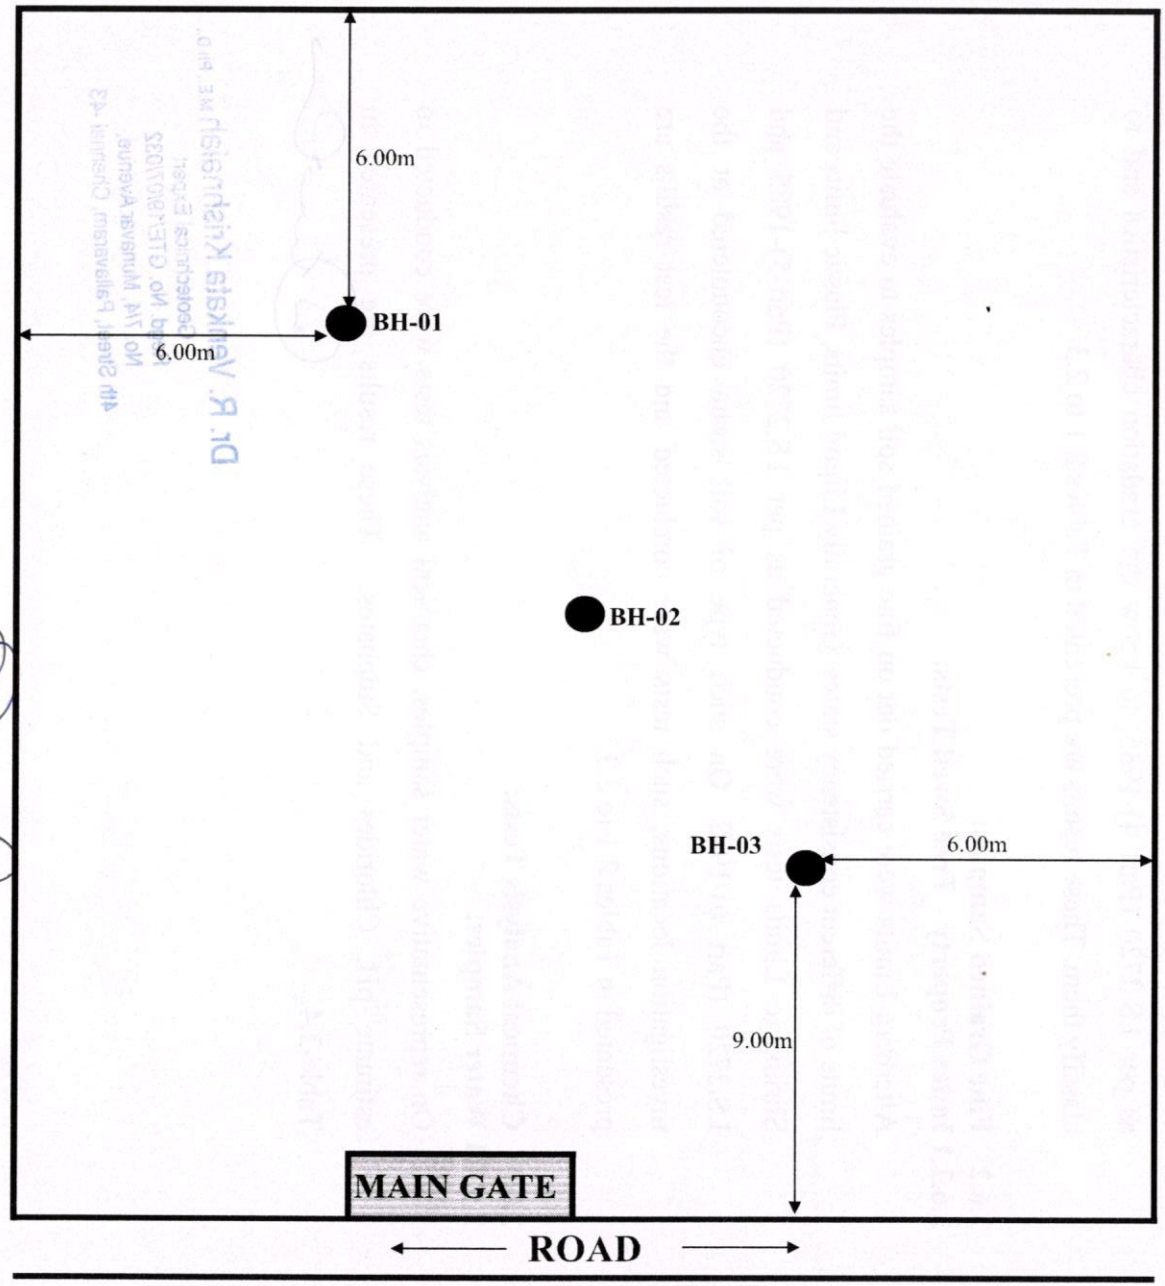



Fig. 2.0: Site Plan Representing the locations of Field Investigation Points

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

Project : Proposed Construction of Residential Building (Stilt+05, 02 Blocks) at New No: 64/270, Royapettah High Road, Royapettah, Chennai-600014

Location: BH-01

Started On : 11/03/2024; Ended On : 12/03/2024 G.W.T: 2.50m below existing ground level

| R.L of Layer (m) | G.W.T. (m) | Soil Profile | Engineering Description of Soil | SPT - Details: Depth of SPT below E.G.L (m) | 0-15 cm | 15-30 cm | 30-45 cm | N-Value | Graphical Representation (0 1 2 3 4 5 6 7 8 9) | Relative Density/Consistency | Type of Sample |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0.50 | | | Filled Up Soil | | | | | | | - | DS |
| | | | Brownish Stiff Silty Clay | 1.50 | 4 | 4 | 6 | 10 | | Stiff | SS |
| 2.00 | | | | | | | | | | | |
| G.W.T | ↓ | | Brownish Very Stiff Silty Clay | 2.50 | 8 | 9 | 8 | 17 | | V.Stiff | SS |
| 3.00 | | | | 3.50 | 6 | 6 | 8 | 14 | | Loose | SS |
| | | | Brownish Loose Silty Fine Sand | 4.50 | 5 | 7 | 9 | 16 | | M.Dense | SS |
| | | | | 6.00 | 8 | 10 | 12 | 22 | | M.Dense | SS |
| | | | Brownish Medium Dense Silty Fine Sand | 7.50 | 7 | 9 | 9 | 18 | | M.Dense | SS |
| 8.50 | | | | 9.00 | 4 | 5 | 6 | 11 | | Stiff | SS |
| | | | Blackish Stiff Silty Clay | 10.00 | 3 | 5 | 4 | 9 | | Stiff | SS |
| 11.00 | | | | | | | | | | | |
| | | | Blackish Medium Stiff Silty Clay | 12.00 | 2 | 3 | 5 | 8 | | M.Stiff | SS |
| 13.50 | | | | 14.00 | 5 | 13 | 8 | 21 | | M.Dense | SS |
| | | | Greyish Medium Dense Silty Fine Sand | 16.00 | 7 | 13 | 16 | 29 | | M.Dense | SS |
| 17.00 | | | | | | | | | | | |
| | | | Greenish to Greyish Dense Silty Fine Sand | 18.00 | 11 | 17 | 24 | 41 | | Dense | SS |
| 19.00 | | | | | | | | | | | |
| | | | Weathered Rock | 20.00 | SPT Hammer Rebounded | | | | | V.Dense | SS |
| 20.20 | | | | | | | | | | | |

Bore Hole Terminated at a depth of 20.20m below the existing grou

**Fig. 2.1 Soil Profile at BH-01 Location**

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

Project : Proposed Construction of Residential Building (Stilt+05, 02 Blocks) at New No: 64/270, Royapettah High Road, Royapettah, Chennai-600014

Location: BH-02

Started On : 13/03/2024; Ended On : 13/03/2024 G.W.T: 2.00m below existing ground level

| R.L of Layer (m) | G.W.T. (m) | Soil Profile | Engineering Description of Soil | SPT - Details: Depth of SPT below E.G.L (m) | 0-15 cm | 15-30 cm | 30-45 cm | N-Value | Relative Density/Consistency | Type of Sample |
|---|---|---|---|---|---|---|---|---|---|---|
| 0.50 | | | Filled Up Soil | | | | | | - | DS |
| | | | Brownish Stiff Silty Clay | 1.50 | 3 | 4 | 7 | 11 | Stiff | SS |
| G.W.T | ↓ | | | 2.50 | 4 | 4 | 9 | 13 | Stiff | SS |
| 3.00 | | | | | | | | | | |
| | | | Brownish Medium Dense Silty Fine Sand | 3.50 | 5 | 5 | 11 | 16 | M.Dense | SS |
| 4.50 | | | | 4.50 | 7 | 4 | 8 | 12 | Loose | SS |
| | | | Brownish Loose Silty Fine Sand | 6.00 | 5 | 11 | 14 | 25 | M.Dense | SS |
| | | | Brownish Medium Dense Silty Fine Sand | 7.50 | 7 | 9 | 12 | 21 | M.Dense | SS |
| 8.00 | | | | | | | | | | |
| | | | Blackish Medium Stiff Silty Clay | 9.00 | 3 | 3 | 5 | 8 | M.Stiff | SS |
| 9.50 | | | | | | | | | | |
| | | | Blackish Stiff Silty Clay | 10.00 | 4 | 6 | 4 | 10 | Stiff | SS |
| 11.00 | | | | | | | | | | |
| | | | Blackish Medium Stiff Silty Clay | 12.00 | 2 | 3 | 3 | 6 | M.Stiff | SS |
| 13.00 | | | | | | | | | | |
| | | | Greyish Dense Silty Fine Sand | 14.00 | 8 | 11 | 26 | 37 | Dense | SS |
| | | | | 16.00 | 10 | 12 | 19 | 31 | Dense | SS |
| 17.00 | | | | | | | | | | |
| | | | Greenish to Greyish Very Dense Silty Fine Sand | 18.00 | 15 | 22 | 39 | 61 | V.Dense | SS |
| 18.80 | | | | | | | | | | |
| | | | Weathered Rock | 20.00 | SPT Hammer Rebounded | | | | V.Dense | SS |
| 20.20 | | | | | | | | | | |

Bore Hole Terminated at a depth of 20.20m below the existing grou

**Fig. 2.2 Soil Profile at BH-02 Location**

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

Project : Proposed Construction of Residential Building (Stilt+05, 02 Blocks) at New No: 64/270, Royapettah High Road, Royapettah, Chennai-600014

Location: BH-03

Started On : 14/03/2024; Ended On : 14/03/2024 G.W.T: 2.00m below existing ground level

| R.L of Layer (m) | G.W.T. (m) | Soil Profile | Engineering Description of Soil | SPT - Details: Depth of SPT below E.G.L (m) | 0-15 cm | 15-30 cm | 30-45 cm | N-Value | Relative Density/Consistency | Type of Sample |
|---|---|---|---|---|---|---|---|---|---|---|
| 0.50 | | | Filled Up Soil | | | | | | - | DS |
| 2.00 | ↓ | | Brownish Stiff Silty Clay | 1.50 | 5 | 4 | 5 | 9 | Stiff | SS |
| 3.00 | | | Brownish Medium Stiff Silty Clay | 2.50 | 3 | 2 | 5 | 7 | M.Stiff | SS |
| 4.00 | | | Brownish Stiff Silty Clay | 3.50 | 4 | 4 | 9 | 13 | Stiff | SS |
| 6.00 | | | Brownish Loose Silty Fine Sand | 4.50 | 5 | 8 | 7 | 15 | Loose | SS |
| 8.50 | | | Brownish Medium Dense Silty Fine Sand | 6.00 | 7 | 13 | 15 | 28 | M.Dense | SS |
| 11.00 | | | Blackish Medium Stiff Silty Clay | 7.50 | 9 | 11 | 19 | 30 | M.Dense | SS |
| 17.00 | | | Greyish Medium Dense Silty Fine Sand | 9.00 | 2 | 3 | 2 | 5 | M.Stiff | SS |
| | | | | 10.00 | 2 | 3 | 3 | 6 | M.Stiff | SS |
| | | | | 12.00 | 5 | 8 | 8 | 16 | M.Dense | SS |
| | | | | 14.00 | 7 | 9 | 13 | 22 | M.Dense | SS |
| | | | | 16.00 | 8 | 12 | 14 | 26 | M.Dense | SS |
| 19.00 | | | Greenish to Greyish Very Dense Silty Fine Sand | 18.00 | 17 | 35 | 39 | 74 | V.Dense | SS |
| 20.20 | | | Weathered Rock | 20.00 | SPT Hammer Rebounded | | | | V.Dense | SS |

Bore Hole Terminated at a depth of 20.20m below the existing grd.

**Fig. 2.3 Soil Profile at BH-03 Location**

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

## Table 2.1: Laboratory Test Results on the Soil Samples Collected from BH-01

| Depth of Sample below E.G.L. (m) | SPT of Sample | Type of Sample | Engineering Description of Soil | NMC(%) | Natural Density (g/cc) | Clay | | | | | Relative Density/ Consistency | Sieve Analysis | | | | | | IS-Classification |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | LL (%) | PL (%) | PI | $I_c$ | FS | | Gravel (%) | Coarse (%) | Medium (%) | Fine (%) | Silt (%) | Clay (%) | |
| 0.00 to 0.50 | - | DS | Filled Up Soil | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 0.50 to 2.00 | 10 | SS | Silty Clay | 33 | 1.7 | 56 | 27 | 29 | 0.79 | 13 | Stiff | 0 | 0 | 0 | 0 | 19 | 81 | CH |
| 2.00 to 3.00 | 17 | SS | Silty Clay | 28 | 1.8 | 47 | 30 | 17 | 1.12 | - | V.Stiff | 0 | 0 | 0 | 0 | 22 | 78 | CI |
| 3.00 to 4.50 | 14 | SS | Silty Fine Sand | - | 1.5 | - | - | - | - | - | Loose | 0 | 0 | 5 | 73 | 22 | 0 | SM |
| 4.50 to 8.50 | 18 | SS | Silty Fine Sand | - | 1.6 | - | - | - | - | - | M.Dense | 0 | 0 | 0 | 77 | 23 | 0 | SM |
| 8.50 to 11.00 | 10 | SS | Silty Clay | 32 | 1.7 | 55 | 26 | 29 | 0.79 | - | Stiff | 0 | 0 | 0 | 0 | 19 | 81 | CH |
| 11.00 to 13.50 | 8 | SS | Silty Clay | 35 | 1.6 | 59 | 26 | 33 | 0.73 | - | M.Stiff | 0 | 0 | 0 | 0 | 17 | 83 | CH |
| 13.50 to 17.00 | 25 | SS | Silty Fine Sand | - | 1.7 | - | - | - | - | - | M.Dense | 0 | 0 | 0 | 81 | 19 | 0 | SM |
| 17.00 to 19.00 | 41 | SS | Silty Fine Sand | - | 1.9 | - | - | - | - | - | Dense | 0 | 0 | 0 | 83 | 17 | 0 | SM |
| 19.00 to 20.20 | >100 | SS | Weathered Rock | - | 2.0 | - | - | - | - | - | V.Dense | 14 | 37 | 27 | 14 | 8 | 0 | SDR |

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

## Table 2.2: Laboratory Test Results on the Soil Samples Collected from BH-02

| Depth of Sample below E.G.L. (m) | SPT of Sample | Type of Sample | Engineering Description of Soil | NMC(%) | Natural Density (g/cc) | Clay | | | | | Relative Density/ Consistency | Sieve Analysis | | | | | | IS-Classification |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | LL (%) | PL (%) | PI | $I_c$ | FS | | Gravel (%) | Coarse (%) | Medium (%) | Fine (%) | Silt (%) | Clay (%) | |
| 0.00 to 0.50 | - | DS | Filled Up Soil | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 0.50 to 3.00 | 12 | SS | Silty Clay | 31 | 1.7 | 55 | 25 | 30 | 0.80 | 11 | Stiff | 0 | 0 | 0 | 0 | 21 | 79 | CH |
| 3.00 to 4.50 | 16 | SS | Silty Fine Sand | - | 1.6 | - | - | - | - | - | M.Dense | 0 | 0 | 4 | 79 | 17 | 0 | SM |
| 4.50 to 6.00 | 12 | SS | Silty Fine Sand | - | 1.5 | - | - | - | - | - | Loose | 0 | 0 | 7 | 77 | 16 | 0 | SM |
| 6.00 to 8.00 | 23 | SS | Silty Fine Sand | - | 1.7 | - | - | - | - | - | M.Dense | 0 | 0 | 0 | 80 | 20 | 0 | SM |
| 8.00 to 9.50 | 8 | SS | Silty Clay | 36 | 1.6 | 59 | 27 | 32 | 0.72 | - | M.Stiff | 0 | 0 | 0 | 0 | 17 | 83 | CH |
| 9.50 to 11.00 | 10 | SS | Silty Clay | 33 | 1.7 | 56 | 27 | 29 | 0.79 | - | Stiff | 0 | 0 | 0 | 0 | 20 | 80 | CH |
| 11.00 to 13.00 | 6 | SS | Silty Clay | 39 | 1.5 | 61 | 24 | 37 | 0.59 | - | M.Stiff | 0 | 0 | 0 | 0 | 15 | 85 | CH |
| 13.00 to 17.00 | 34 | SS | Silty Fine Sand | - | 1.9 | - | - | - | - | - | Dense | 0 | 0 | 0 | 83 | 17 | 0 | SM |
| 17.00 to 18.80 | 61 | SS | Silty Fine Sand | - | 2.0 | - | - | - | - | - | V.Dense | 0 | 0 | 0 | 84 | 16 | 0 | SM |
| 18.80 to 20.20 | >100 | SS | Weathered Rock | - | 2.0 | - | - | - | - | - | V.Dense | 19 | 33 | 22 | 17 | 9 | 0 | SDR |

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

## Table 2.3: Laboratory Test Results on the Soil Samples Collected from BH-03

| Depth of Sample below E.G.L. (m) | SPT of Sample | Type of Sample | Engineering Description of Soil | NMC(%) | Natural Density (g/cc) | Clay | | | | | Relative Density/ Consistency | Sieve Analysis | | | | | | IS-Classification |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | LL (%) | PL (%) | PI | $I_c$ | FS | | Gravel (%) | Coarse (%) | Medium (%) | Fine (%) | Silt (%) | Clay (%) | |
| 0.00 to 0.50 | - | DS | Filled Up Soil | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 0.50 to 2.00 | 9 | SS | Silty Clay | 33 | 1.7 | 57 | 27 | 30 | 0.80 | 14 | Stiff | 0 | 0 | 0 | 0 | 19 | 81 | CH |
| 2.00 to 3.00 | 7 | SS | Silty Clay | 36 | 1.6 | 60 | 26 | 34 | 0.71 | - | M.Stiff | 0 | 0 | 0 | 0 | 16 | 84 | CH |
| 3.00 to 4.00 | 13 | SS | Silty Clay | 29 | 1.7 | 51 | 27 | 24 | 0.92 | - | Stiff | 0 | 0 | 0 | 0 | 22 | 78 | CH |
| 4.00 to 6.00 | 15 | SS | Silty Fine Sand | - | 1.5 | - | - | - | - | - | Loose | 0 | 0 | 7 | 74 | 19 | 0 | SM |
| 6.00 to 8.50 | 29 | SS | Silty Fine Sand | - | 1.8 | - | - | - | - | - | M.Dense | 0 | 0 | 0 | 82 | 18 | 0 | SM |
| 8.50 to 11.00 | 5 | SS | Silty Clay | 41 | 1.5 | 62 | 21 | 41 | 0.51 | - | M.Stiff | 0 | 0 | 0 | 0 | 16 | 84 | CH |
| 11.00 to 17.00 | 21 | SS | Silty Fine Sand | - | 1.7 | - | - | - | - | - | M.Dense | 0 | 0 | 0 | 79 | 21 | 0 | SM |
| 17.00 to 19.00 | 74 | SS | Silty Fine Sand | - | 2.0 | - | - | - | - | - | V.Dense | 0 | 0 | 0 | 84 | 16 | 0 | SM |
| 19.00 to 20.20 | >100 | SS | Weathered Rock | - | 2.0 | - | - | - | - | - | V.Dense | 15 | 35 | 15 | 28 | 7 | 0 | SDR |

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

**Table 2.4: Chemical Analysis Results conducted on Water Samples collected from BH-01 to BH-03**

| Location | Depth of Sample below E.G.L. (m) | pH | Chlorides (ppm) | Sulphates (ppm) |
|---|---|---|---|---|
| BH-01 | 3.00 | 6.77 | 314.83 | 147.84 |
| BH-02 | 3.00 | 6.77 | 315.97 | 147.99 |
| BH-03 | 3.00 | 6.76 | 322.06 | 149.01 |

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

# CHAPTER-3

# SUB-SURFACE STRATIFICATION

## 3.0 Preamble

The sub surface stratification at borehole locations, with respect to foundation/geotechnical engineering application are derived based on the visual identification, laboratory classification tests and field in-situ strength tests. Further, the strength parameters are estimated based on the in-situ strength test results as per the following correlation.

* **For Coarse Grained Samples, Ref. Fig.1, IS: 6403 to estimate Angle of Shearing Resistance.**
* **For Fine Grained Samples, Ref. Terzaghi & Peck, 1948, to estimate Unconfined Compressive Strength.**

## 3.1 Sub Surface Stratification:

### 3.1.1 Soil Profile at BH-01 Location

**(At BH-01 Location, as presented in Site plan)**

* **Layer-1 (from E.G.L to 0.50m depth)**

| | |
|---|---|
| Type of Strata | Filled Up Soil |
| Colour | - |
| Thickness of Layer | 0.50m |

* **Layer-2 (from 0.50m to 2.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Clay |
| Colour | Brownish |
| Thickness of Layer | 1.50m |
| SPT of the layer | 10 |
| Consistency | Stiff |
| Un-drained Cohesion, Cu | 66.66kPa |

* **Layer-3 (from 2.00m to 3.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Clay |
| Colour | Brownish |
| Thickness of Layer | 1.00m |
| SPT of the layer | 17 |
| Consistency | Very Stiff |
| Un-drained Cohesion, Cu | 113.33kPa |

* **Layer-4 (from 3.00m to 4.50m depth)**

| | |
|---|---|
| Type of Strata | Silty Fine Sand |
| Colour | Brownish |
| Thickness of Layer | 1.50m |
| SPT of the layer | 14 |

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

| | |
|---|---|
| Relative Density | Loose |
| Angle of Shearing Resistance, ϕ | $31.20^0$ |
| * **Layer-5 (from 4.50m to 8.50m depth)** | |
| Type of Strata | Silty Fine Sand |
| Colour | Brownish |
| Thickness of Layer | 4.00m |
| SPT of the layer | 18 |
| Relative Density | Medium Dense |
| Angle of Shearing Resistance, ϕ | $32.40^0$ |
| * **Layer-6 (from 8.50m to 11.00m depth)** | |
| Type of Strata | Silty Clay |
| Colour | Blackish |
| Thickness of Layer | 2.50m |
| SPT of the layer | 10 |
| Consistency | Stiff |
| Un-drained Cohesion, Cu | 66.66kPa |
| * **Layer-7 (from 11.00m to 13.50m depth)** | |
| Type of Strata | Silty Clay |
| Colour | Blackish |
| Thickness of Layer | 2.50m |
| SPT of the layer | 08 |
| Consistency | Medium Stiff |
| Un-drained Cohesion, Cu | 53.33kPa |
| * **Layer-8 (from 13.50m to 17.00m depth)** | |
| Type of Strata | Silty Fine Sand |
| Colour | Greyish |
| Thickness of Layer | 3.50m |
| SPT of the layer | 25 |
| Relative Density | Medium Dense |
| Angle of Shearing Resistance, ϕ | $34.50^0$ |
| * **Layer-9 (from 17.00m to 19.00m depth)** | |
| Type of Strata | Silty Fine Sand |
| Colour | Greenish to Greyish |
| Thickness of Layer | 2.00m |
| SPT of the layer | 41 |
| Relative Density | Dense |
| Angle of Shearing Resistance, ϕ | $38.975^0$ |
| * **Layer-10 (from 19.00m to 20.20m depth)** | |
| Type of Strata | Weathered Rock |
| Colour | - |
| Thickness of Layer | 1.20m |
| SPT of the layer | >100 |
| Relative Density | Very Dense |
| Angle of Shearing Resistance, ϕ | $42.50^0$ |

**Ground Water**

Ground water table was encountered at a depth of 2.50m below the existing ground level during the third week of March 2024.

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

### 3.1.2 Soil Profile at BH-02 Location

**(At BH-02 Location, as presented in Site plan)**

* **Layer-1 (from E.G.L to 0.50m depth)**

| | |
|---|---|
| Type of Strata | Filled Up Soil |
| Colour | - |
| Thickness of Layer | 0.50m |

* **Layer-2 (from 0.50m to 3.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Clay |
| Colour | Brownish |
| Thickness of Layer | 2.50m |
| SPT of the layer | 12 |
| Consistency | Stiff |
| Un-drained Cohesion, Cu | 80.00kPa |

* **Layer-3 (from 3.00m to 4.50m depth)**

| | |
|---|---|
| Type of Strata | Silty Fine Sand |
| Colour | Brownish |
| Thickness of Layer | 1.50m |
| SPT of the layer | 16 |
| Relative Density | Medium Dense |
| Angle of Shearing Resistance, $\phi$ | $31.80^0$ |

* **Layer-4 (from 4.50m to 6.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Fine Sand |
| Colour | Brownish |
| Thickness of Layer | 1.50m |
| SPT of the layer | 12 |
| Relative Density | Loose |
| Angle of Shearing Resistance, $\phi$ | $30.60^0$ |

* **Layer-5 (from 6.00m to 8.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Fine Sand |
| Colour | Brownish |
| Thickness of Layer | 2.00m |
| SPT of the layer | 23 |
| Relative Density | Medium Dense |
| Angle of Shearing Resistance, $\phi$ | $33.90^0$ |

* **Layer-6 (from 8.00m to 9.50m depth)**

| | |
|---|---|
| Type of Strata | Silty Clay |
| Colour | Blackish |
| Thickness of Layer | 1.50m |
| SPT of the layer | 08 |
| Consistency | Medium Stiff |
| Un-drained Cohesion, Cu | 53.33kPa |

* **Layer-7 (from 9.50m to 11.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Clay |
| Colour | Blackish |
| Thickness of Layer | 1.50m |
| SPT of the layer | 10 |
| Consistency | Stiff |
| Un-drained Cohesion, Cu | 66.66kPa |

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

* **Layer-8 (from 11.00m to 13.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Clay |
| Colour | Blackish |
| Thickness of Layer | 2.00m |
| SPT of the layer | 06 |
| Consistency | Medium Stiff |
| Un-drained Cohesion, Cu | 40.00kPa |

* **Layer-9 (from 13.00m to 17.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Fine Sand |
| Colour | Greyish |
| Thickness of Layer | 4.00m |
| SPT of the layer | 34 |
| Relative Density | Dense |
| Angle of Shearing Resistance, $\phi$ | $37.10^0$ |

* **Layer-10 (from 17.00m to 18.80m depth)**

| | |
|---|---|
| Type of Strata | Silty Fine Sand |
| Colour | Greenish to Greyish |
| Thickness of Layer | 1.80m |
| SPT of the layer | 61 |
| Relative Density | Very Dense |
| Angle of Shearing Resistance, $\phi$ | $42.50^0$ |

* **Layer-11 (from 18.80m to 20.20m depth)**

| | |
|---|---|
| Type of Strata | Weathered Rock |
| Colour | - |
| Thickness of Layer | 1.40m |
| SPT of the layer | >100 |
| Relative Density | Very Dense |
| Angle of Shearing Resistance, $\phi$ | $42.50^0$ |

**Ground Water**

Ground water table was encountered at a depth of 2.00m below the existing ground level during the third week of March 2024.

### 3.1.3 Soil Profile at BH-03 Location
**(At BH-03 Location, as presented in Site plan)**

* **Layer-1 (from E.G.L to 0.50m depth)**

| | |
|---|---|
| Type of Strata | Filled Up Soil |
| Colour | - |
| Thickness of Layer | 0.50m |

* **Layer-2 (from 0.50m to 2.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Clay |
| Colour | Brownish |
| Thickness of Layer | 1.50m |
| SPT of the layer | 09 |
| Consistency | Stiff |
| Un-drained Cohesion, Cu | 60.00kPa |

* **Layer-3 (from 2.00m to 3.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Clay |
| Colour | Brownish |

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

| | |
|---|---|
| Thickness of Layer | 1.00m |
| SPT of the layer | 07 |
| Consistency | Medium Stiff |
| Un-drained Cohesion, Cu | 46.66kPa |

* **Layer-4 (from 3.00m to 4.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Clay |
| Colour | Brownish |
| Thickness of Layer | 1.00m |
| SPT of the layer | 13 |
| Consistency | Stiff |
| Un-drained Cohesion, Cu | 86.66kPa |

* **Layer-5 (from 4.00m to 6.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Fine Sand |
| Colour | Brownish |
| Thickness of Layer | 2.00m |
| SPT of the layer | 15 |
| Relative Density | Loose |
| Angle of Shearing Resistance, $\phi$ | $31.50^0$ |

* **Layer-6 (from 6.00m to 8.50m depth)**

| | |
|---|---|
| Type of Strata | Silty Fine Sand |
| Colour | Brownish |
| Thickness of Layer | 2.50m |
| SPT of the layer | 29 |
| Relative Density | Medium Dense |
| Angle of Shearing Resistance, $\phi$ | $35.70^0$ |

* **Layer-7 (from 8.50m to 11.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Clay |
| Colour | Blackish |
| Thickness of Layer | 2.50m |
| SPT of the layer | 05 |
| Consistency | Medium Stiff |
| Un-drained Cohesion, Cu | 33.33kPa |

* **Layer-7 (from 11.00m to 17.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Fine Sand |
| Colour | Greyish |
| Thickness of Layer | 6.00m |
| SPT of the layer | 21 |
| Relative Density | Medium Dense |
| Angle of Shearing Resistance, $\phi$ | $33.30^0$ |

* **Layer-9 (from 17.00m to 19.00m depth)**

| | |
|---|---|
| Type of Strata | Silty Fine Sand |
| Colour | Greenish to Greyish |
| Thickness of Layer | 2.00m |
| SPT of the layer | 74 |
| Relative Density | Very Dense |
| Angle of Shearing Resistance, $\phi$ | $42.50^0$ |

* **Layer-10 (from 19.00m to 20.20m depth)**

| | |
|---|---|
| Type of Strata | Weathered Rock |
| Colour | - |
| Thickness of Layer | 1.20m |

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

| | |
|---|---|
| SPT of the layer | >100 |
| Relative Density | Very Dense |
| Angle of Shearing Resistance, $\phi$ | $42.50^0$ |

**Ground Water**

Ground water table was encountered at a depth of 2.00m below the existing ground level during the third week of March 2024.

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

# CHAPTER-4

# FOUNDATION SYSTEM

## 4.0 Preamble

The foundation system design is an interface between super structure and the sub soil bearing strata characteristics. A sound foundation system should be safe against bearing strata shear response under the super structure load intensity. Similarly, the stability of the foundation system is governed by the bearing strata deformation response under the super structure load intensity. In addition, as a combined system of super structure and foundation, the overall stability is also governed by the super structure arrangement.

Considering the above aspects of foundation design, the suitable type of foundation system with respect to the sub soil conditions encountered at the borehole locations is presented in the subsequent sections.

## 4.1 Bearing Strata Characteristics

From field investigations, it can be observed that the sub-soil strata encountered at shallow depths are weak from both shear strength characteristics and deformation considerations and hence cannot be considered as bearing strata for proposed impending loads from structure.

However, the refusal soil strata (SPT>60) encountered below a maximum depth of 19.00m from existing ground level (Ref. BH-03) can be considered as good end bearing strata for proposed impending loads from structure.

Considering the above, suitable foundation system is presented below.

## 4.2. Foundation System

### 4.2.1 Deep Foundation System-19.50m long Bored Cast-in-Situ Friction cum End Bearing Piles

Considering the weak shear strength characteristics of sub-soil strata encountered at shallow depths, deep foundation system consisting of 19.50m long bored cast-in-situ Friction cum End Bearing Piles can be adopted.

Piles shall be drilled through DMC (direct mud circulation) technique.

For four different diameters, the safe load carrying capacities of 19.50m long bored cast-in-situ Friction cum End Bearing Piles are computed and presented below, which can be adopted for foundation design purposes.

Dr. R. Venkata Krishnaiah
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

| S. No | Type of Installation of Pile | Length of Pile below Existing Ground Level (m) | Type of Bearing Strata | Diameter of Pile (mm) | Safe Load Carrying Capacity (MT) | Safe Pull Out Capacity (MT) |
|---|---|---|---|---|---|---|
| 1 | Bored Cast-in-Situ | 19.50 | Weathered Rock | 450 | 80 | 61 |
| 2 | | | | 500 | 90 | 68 |
| 3 | | | | 550 | 100 | 74 |
| 4 | | | | 600 | 110 | 81 |

The computations of safe load carrying capacity for 450mm diameter and 19.50m long bored cast-in-situ Friction cum End Bearing pile are annexed to this report.

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

# CHAPTER-5

# CONCLUSIONS & RECOMMENDATIONS

1. Deep Foundation system presented in Clause 4.2.1, Chapter-IV can be adopted for foundation design purposes.
2. Suitable pile load tests (as per I.S: 2911, part-IV) shall be performed to confirm the presented **theoretical** safe load carrying capacities and arrive at the **allowable** load carrying capacity of piles under considerations. **(Mandatory)**.
3. Care shall be taken so that the ultimate end bearing soil strata are none other than recommended "**Weathered Rock**" type. The same shall be re-affirmed by our Geotechnical Engineer during foundation installation works are under progress.
4. Pile cap can be located over 0.40m thick well compacted ground replaced CNS (Cohesive Non-Swelling) soil surface.
5. Piles shall be installed using DMC (direct mud circulation) technique only.
6. Piles shall be grouped according to the column design load requirements.
7. Allowable load carrying capacities of piles shall be limited to their structural capacities.

**General**

8. **CNS can be well graded and non-plastic earth like quarry dust or clean river sand or sand: gravels mix (1:2) or fly-ash that shall be well compacted at site to achieve more than 95% of laboratory maximum dry density at optimum moisture content.**
9. As the chlorides and sulphates present in the collected water samples are within the permissible limits, no special steel or cement is recommended to be used for **open** foundation construction (if adopted or proposed) purposes.
10. **It is recommended to extract the water samples at different intervals up to deeper levels from an open-well/dug-well and tested for the chemical**

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

**parameters as per the required usage or purpose and also to understand the construction material to be used for deep foundation purposes.**

For Geo Mines Engineers Pvt. Ltd.

Director

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

CMDA

# DESIGN OF PILE FOUNDATION (Refer BH-03)

**Refer, IS:2911(Part I/Sec 2)-1979, Reaffirmed 1997**

**1.0 Type of Installation of Pile** — **Bored Cast in Situ**

**1.1 Geometrical Data**

| | | |
|---|---|---|
| Assumed Diameter of pile(D): | **450.0** | mm |
| Assumed R.L of E.G.L: | 0.000 | m |
| Length of pile below E.G.L.(l) : | **19.500** | m |
| R.L. of Bot. of Pile | -19.50 | m |

**1.2 Design of Pile for Vertical Compression**

**1.2.1 Computation of Skin Resistance:**

**1.2.1.1** **Layer-II**

| | | |
|---|---|---|
| Type of Strata: | Silty Clay | |
| Average SPT of the strata,N: | 9 | |
| Bulk Density of the strata,$\gamma$: | 17 | $kN/m^3$ |
| Undrained Cohesion, Cu: | 60.00 | kPa |
| R.L of top of Strata: | -0.50 | m |
| R.L of bottom of Strata: | -2.00 | m |
| Average Thickness of Strata,$I_c$: | 1.50 | m |
| Effective overburden pressure over the top of strata,$\sigma_{top}$: | 0.00 | $kN/m^2$ |
| Effective overburden pressure over the bottom of strata,$\sigma_{bottom}$: | 10.50 | $kN/m^2$ |
| Effective overburden pressure at the middle of the strata,$\sigma_{middle}$: | 5.25 | $kN/m^2$ |
| Adhesion Factor, $\alpha$: | 0.40 | |
| Skin Resistance of the pile,$q_s$: | 50.89 | kN |
| ($q_s$:$\alpha$*Cu*pi()*d*Ic) | | |

**1.2.1.2** **Layer-III**

| | | |
|---|---|---|
| Type of Strata: | Silty Clay | |
| Average SPT of the strata,N: | 7 | |
| Bulk Density of the strata,$\gamma$: | 16 | $kN/m^3$ |
| Undrained Cohesion, Cu: | 46.67 | kPa |
| R.L of top of Strata: | -2.00 | m |
| R.L of bottom of Strata: | -3.00 | m |
| Average Thickness of Strata,$I_c$: | 1.00 | m |
| Effective overburden pressure over the top of strata,$\sigma_{top}$: | 10.50 | $kN/m^2$ |
| Effective overburden pressure over the bottom of strata,$\sigma_{bottom}$: | 16.50 | $kN/m^2$ |
| Effective overburden pressure at the middle of the strata,$\sigma_{middle}$: | 13.50 | $kN/m^2$ |
| Adhesion Factor, $\alpha$: | 0.60 | |

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

| | | |
|---|---|---|
| Skin Resistance of the pile,$q_s$: | 39.58 | kN |
| ($q_s$:α*Cu*pi()*d*Ic) | | |

**1.2.1.3** **Layer-IV**

| | | |
|---|---|---|
| Type of Strata: | Silty Clay | |
| Average SPT of the strata,N: | 13 | |
| Bulk Density of the strata,γ: | 17 | $kN/m^3$ |
| Undrained Cohesion, Cu: | 86.67 | kPa |
| R.L of top of Strata: | -3.00 | m |
| R.L of bottom of Strata: | -4.00 | m |
| Average Thickness of Strata,$I_c$: | 1.00 | m |
| Effective overburden pressure over the top of strata,$\sigma_{top}$: | 16.50 | $kN/m^2$ |
| Effective overburden pressure over the bottom of strata,$\sigma_{bottom}$: | 23.50 | $kN/m^2$ |
| Effective overburden pressure at the middle of the strata,$\sigma_{middle}$: | 20.00 | $kN/m^2$ |
| Adhesion Factor, α: | 0.40 | |
| Skin Resistance of the pile,$q_s$: | 49.01 | kN |
| ($q_s$:α*Cu*pi()*d*Ic) | | |

**1.2.1.4** **Layer-V**

| | | |
|---|---|---|
| Type of Strata: | Silty Fine Sand | |
| Average SPT of the strata,N: | 15 | |
| Bulk Density of the strata,γ: | 15 | $kN/m^3$ |
| Angle of Shearing Resistance,ϕ: | 31.5 | Deg. |
| R.L of top of Strata: | -4.00 | m |
| R.L of bottom of Strata: | -6.00 | m |
| Average Thickness of Strata,$I_c$: | 2.00 | m |
| Effective overburden pressure over the top of strata,$\sigma_{top}$: | 23.50 | $kN/m^2$ |
| Effective overburden pressure over the bottom of strata,$\sigma_{bottom}$: | 33.50 | $kN/m^2$ |
| Effective overburden pressure at the middle of the strata,$\sigma_{middle}$: | 28.50 | $kN/m^2$ |
| Coeff. Of Earth Pressure, k: | 1.00 | |
| Skin Resistance of the pile,$q_s$: | 49.38 | kN |
| ($q_s$:σ*k*tanϕ*pi()*d*Ic) | | |

**1.2.1.5** **Layer-VI**

| | | |
|---|---|---|
| Type of Strata: | Silty Fine Sand | |
| Average SPT of the strata,N: | 29 | |
| Bulk Density of the strata,γ: | 18 | $kN/m^3$ |
| Angle of Shearing Resistance,ϕ: | 35.7 | Deg. |
| R.L of top of Strata: | -6.00 | m |
| R.L of bottom of Strata: | -8.50 | m |

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

| | | |
|---|---|---|
| Average Thickness of Strata,$I_c$: | 2.50 | m |
| Effective overburden pressure over the top of strata,$\sigma_{top}$: | 33.50 | $kN/m^2$ |
| Effective overburden pressure over the bottom of strata,$\sigma_{bottom}$: | 53.50 | $kN/m^2$ |
| Effective overburden pressure at the middle of the strata,$\sigma_{middle}$: | 43.50 | $kN/m^2$ |
| Coeff. Of Earth Pressure, k: | 1.50 | |
| Skin Resistance of the pile,$q_s$: | 165.71 | kN |
| ($q_s$:σ*k*tanϕ*pi()*d*Ic) | | |

**1.2.1.6 Layer-VII**

| | | |
|---|---|---|
| Type of Strata: | Silty Clay | |
| Average SPT of the strata,N: | 5 | |
| Bulk Density of the strata,γ: | 15 | $kN/m^3$ |
| Undrained Cohesion, Cu: | 33.33 | kPa |
| R.L of top of Strata: | -8.50 | m |
| R.L of bottom of Strata: | -11.00 | m |
| Average Thickness of Strata,$I_c$: | 2.50 | m |
| Effective overburden pressure over the top of strata,$\sigma_{top}$: | 53.50 | $kN/m^2$ |
| Effective overburden pressure over the bottom of strata,$\sigma_{bottom}$: | 66.00 | $kN/m^2$ |
| Effective overburden pressure at the middle of the strata,$\sigma_{middle}$: | 59.75 | $kN/m^2$ |
| Adhesion Factor, α: | 0.70 | |
| Skin Resistance of the pile,$q_s$: | 82.47 | kN |
| ($q_s$:α*Cu*pi()*d*Ic) | | |

**1.2.1.7 Layer-VIII**

| | | |
|---|---|---|
| Type of Strata: | Silty Fine Sand | |
| Average SPT of the strata,N: | 21 | |
| Bulk Density of the strata,γ: | 17 | $kN/m^3$ |
| Angle of Shearing Resistance,ϕ: | 33.3 | Deg. |
| R.L of top of Strata: | -11.00 | m |
| R.L of bottom of Strata: | -17.00 | m |
| Average Thickness of Strata,$I_c$: | 6.00 | m |
| Effective overburden pressure over the top of strata,$\sigma_{top}$: | 66.00 | $kN/m^2$ |
| Effective overburden pressure over the bottom of strata,$\sigma_{bottom}$: | 108.00 | $kN/m^2$ |
| Effective overburden pressure at the middle of the strata,$\sigma_{middle}$: | 87.00 | $kN/m^2$ |
| Coeff. Of Earth Pressure, k: | 1.50 | |
| Skin Resistance of the pile,$q_s$: | 727.12 | kN |
| ($q_s$:σ*k*tanϕ*pi()*d*Ic) | | |

**1.2.1.8 Layer-IX**

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

| | | |
|---|---|---|
| Type of Strata: | Silty Fine Sand | |
| Average SPT of the strata,N: | 60 | |
| Bulk Density of the strata,$\gamma$: | 20 | $kN/m^3$ |
| Angle of Shearing Resistance,$\phi$: | 42.5 | Deg. |
| R.L of top of Strata: | -17.00 | m |
| R.L of bottom of Strata: | -18.00 | m |
| Average Thickness of Strata,$I_c$: | 1.00 | m |
| Effective overburden pressure over the top of strata,$\sigma_{top}$: | 108.00 | $kN/m^2$ |
| Effective overburden pressure over the bottom of strata,$\sigma_{bottom}$: | 118.00 | $kN/m^2$ |
| Effective overburden pressure at the middle of the strata,$\sigma_{middle}$: | 113.00 | $kN/m^2$ |
| Coeff. Of Earth Pressure, k: | 2.50 | |
| Skin Resistance of the pile,$q_s$: | 365.96 | kN |
| ($q_s$:$\sigma$*k*tan$\phi$*pi()*d*Ic) | | |
| **Ultimate Skin Resistance,$q_s$:** | **1530.13** | **kN** |

**1.2.2 Computation of End Bearing Resistance:**

| | | |
|---|---|---|
| Type of Bearing Strata | Weathered Rock | |
| Cross-Sectional Area of pile,Ap: | 0.159 | $m^2$ |
| R.L of bottom of pile: | -19.50 | |
| Minimum SPT-value of the Bearing Strata | 60 | |
| Angle of Shear Resistance, $\phi$: | 42.50 | Deg. |
| Effective Overburden Pressure, q: | 27.00 | kPa |
| Bearing Capacity Factor(Nq) | 220.00 | |
| **Ultimate End Bearing Resistance (Qp)** | **944.7** | **kN** |
| (Qp=Ap*q*Nq) | | |

| | | | |
|---|---|---|---|
| **1.3.0** | **Ultimate Load Carrying Capacity ($Qu=Qs+Q_p$)** | **2474.8** | **kN** |
| | **Safe Load Carrying Capacity (Qsafe =Qu/2.5)** | **989.9** | **kN** |
| | **However, limit $Q_{safe}$ to the structural capacity of pile:** | **800.0** | **kN** |

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

## Depth of fixity of Pile

Length of Pile

$L_1$ = 0 cm
[ since the pile cast at ground level with fixed head]

Characteristic strength of Concrete

$f_{ck}$ = 30 N/mm$^2$

Diameter of Pile

D = 45 cm

Modulas of Elasticity of Concrete ( E )

$5000 \times \sqrt{f_{ck}} = 5000 \times \sqrt{30}$ N/mm$^2$
[ As per IS 456 :2000 pg. no : 16 ]

= 273861.28 Kg/cm$^2$

Moment of Inertia of Pile ( I )

$\frac{\pi \times D^4}{64} = \frac{3.14 \times 45^4}{64}$ cm$^4$

= 201186.9 cm$^4$

$K_2$ ( constant ) = 48.800 Kg/cm$^2$
[As per IS : 2911 ( Part 1 / Sec 1 ) - appendix-B ]

R ( constant ) = $\sqrt[4]{\frac{(E \times I)}{K_2}}$
[As per IS : 2911 ( Part 1 / Sec 1 ) - appendix-B, Cl.5.5.2 ]

= 183.31 cm

Hence $L_1$ / R = $\frac{L_1}{R}$
[As per IS : 2911 ( Part 1 / Sec 1 ) - appendix-B, Cl.5.5.2 ]

= 0.0E+00

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

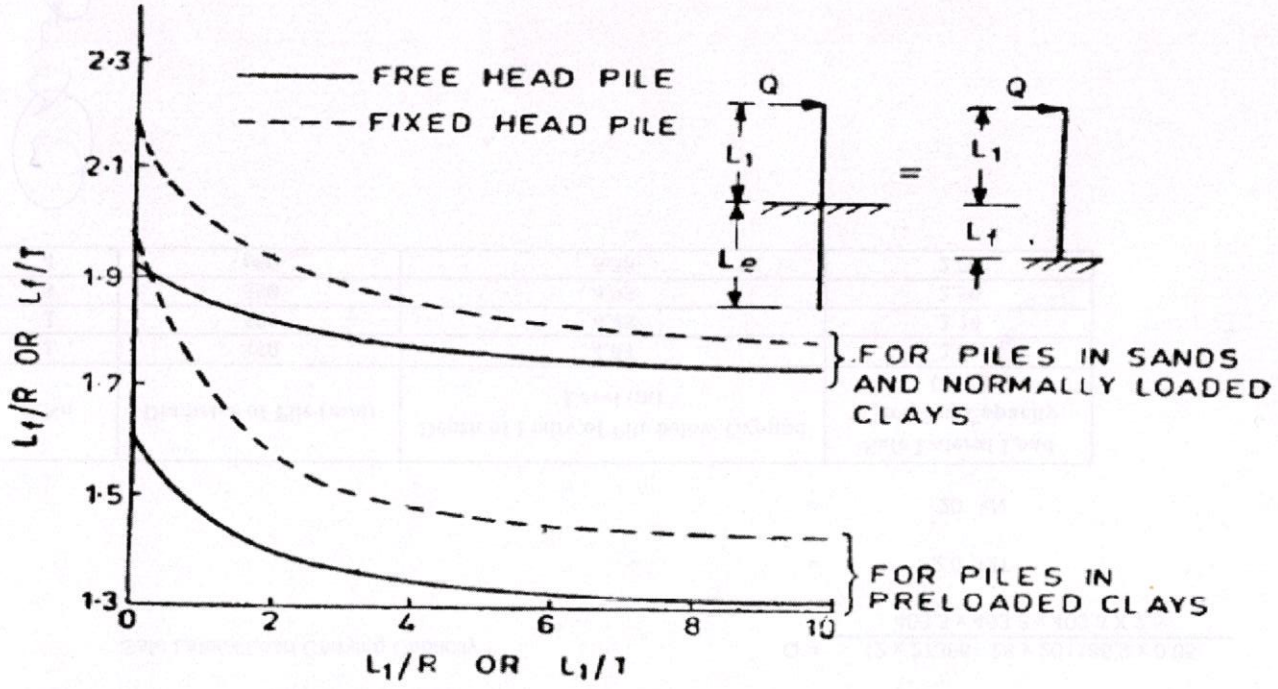



**FIG. 2 DETERMINATION OF DEPTH FIXITY**

For fixed head pile

$\frac{L_1}{R} = 2.2$ [As per IS : 2911 ( Part 1 / Sec 1 ) - appendix-B, Cl.5.5.2 fig 2 ]

Length of fixity

$L_f$ = 403.27 cm [As per IS : 2911 ( Part 1 / Sec 1 ) -
= 4.03 m appendix-B, Cl.5.5.2 ]

Embedded Length

Le > 4 x R [As per IS : 2911 ( Part 1 / Sec 1 ) -
> 7.3 m appendix-B, Cl.5.5.2 ]

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

## Calculation of Lateral capacity of pile

( From IS:2911, Part 1 / Sec. 1, Cl.5.5.2 - Appendix A )

$$\text{Lateral capacity , } Q = \frac{12\,E\,I\,Y}{(L_1 + L_f)^3}$$ for Fixed Head Pile

Where ,

Y = Lateral deflection of pile = 5 mm ( As per IS2911, part1 / sec.1 )

Modulas of Elasticity of Concrete ( E ) = 273861.28 Kg/cm2

Moment of Inertia of Pile ( I ) = 201186.9 cm4

L1 + Lf = 0 + 403.27
= 403.3 cm
= 4.03 m

Safe Lateral Load Carrying Capacity

$$Q = \frac{12 \times 273861.28 \times 201186.9 \times 0.05}{403.3 \times 403.3 \times 403.3 \times 2.5}$$

= 2.0 MT

= 20 kN

| S.No | Diameter of Pile (mm) | Depth of Fixity of Pile below Ground Level (m) | Safe Lateral Load Carrying Capacity (MT) |
|---|---|---|---|
| 1 | 450 | 4.03 | 2.00 |
| 2 | 500 | 4.48 | 2.20 |
| 3 | 550 | 4.93 | 2.50 |
| 4 | 600 | 5.38 | 2.70 |





## our services doesn't just end there

### Buying & Selling Services

Property Buying Assistance, Property Selling Support, Market Price Analysis, Owner Outreach and Negotiation.

### Legal & Documentation Services

Certified EC, Patta, legal opinions, property verification, due diligence, litigation solutions, and legal heir certificates.

### Property Development & Approvals

Building plan approvals, construction, layout and sub-division approvals, zone conversion, and occupancy certification.

### NRI & Investment Services

Escrow Services, Rentals, Litigation Solutions, Property Valuation and Property Management

### Compliance & Special Services

Demolition, Vaasthu checks, regularization of unauthorized buildings, and office space solutions.



# empowering your real estate decisions with smart tools

## Property Valuation & Cost Estimation

Guideline Value, Apartment Composite Value, Stamp Duty & Registration Fees Calculator, Building Value Calculator, Capital Gains Calculator, Area Unit Converter, Length Unit Converter

## Ownership, Compliance & Legal Verification

Encumbrance Certificate (EC) Search, Find Your SRO, Temple Property Check, WAQF Property Check, View Patta/Chitta, View FMB, Patta Analyzer, EC Analyzer

## Zoning & Land Use Analysis

Land Use Zone Finder, CRZ Zone Check, Aquifer Zone Check, CBA Check, EWS Check, Road Width Check, Proposed Road Widening Check, FSI Calculator

## Property Documentation & Workflow Tools

Forms & Templates, Document Generator, Document Translation, Dictionary

## Vastu & Property Management Tools

Home Vastu Shastra, Plot Vastu Shastra, Property Management

Verified RealEstate™

We're honored to be part of your real estate journey

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996
www.verified.realestate