Verified RealEstate™

RE REGULATORY RECORD

RERA Document

The document as the regulator published it, reproduced in full behind this page.

Published for reference. The authority's own register is the operative record.

Verified RealEstate™
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India

hello@verified.realestate
+91 9996 12 9996
verified.realestate

LAND OWNERSHIP FLOW CHART

S. No	TSLR as per Approved Plan	Sale deed				TSLR				GPA				
		Doc No & date	Owner	Survey Number	Extent (Sq.m)	Patta No	Owner	TSLR	Extent Sq.m	Doc No dated	Executed	Infavour of/ Applicant	Survey Number	Extent sq.m
1	1	5257/1964 & 22.08.1964 450/1988 & 26.09.1988 15886/2023 & 18.11.2023	Premier Hi Tech Industries Private Limited	583/1	2821.30 Sqm	-	Premier Hi Tech Industries Private Limited	1	2800	2237/2024 & 20.01.2024	M/s Premium Hi tech Industries Private Limited, Premier Pumps & Premier Engineers	M/s Sree Sharadha Ambal Foundations	583/1	2812.30
2	18	1194/1994 & 11.03.1994	Premier Engineers	192	202.32	-	Premier Engineers	18	197	2237/2024 & 20.01.2024	M/s Premium Hi tech Industries Private Limited, Premier Pumps & Premier Engineers	M/s Sree Sharadha Ambal Foundations	192	202.32
3	22	934/1981 & 18.02.1981	Premier Pumps	192	546.272 Sqm	-	Premier Pumps	22	550	2237/2024 & 20.01.2024	M/s Premium Hi tech Industries Private Limited, Premier Pumps & Premier Engineers	M/s Sree Sharadha Ambal Foundations	192	546.272
Total					**3560.89 Sq.m**				**3547 Sq.m**					**3560.89 Sqm**

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

SOIL EXPLORATION REPORT

For

M/s. PREMIER HI TECH INDUSTRIES PVT. LTD.,

M/s. PREMIER PUMPS

M/s. PREMIER ENGINEERING

Ref: GEO – G - 239 – 2023-24 *Date: 13.02.2024 – 17.02.2024*

PROJECT NAME

SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF MULTISTORIED BUILDING WITH BASEMENT + G + 10 FLOORS OF PLINTH AREA 12,000 SQ. FT., @ SF. NO. : 583/1 IN UPPLIPALAYAM VILLAGE & SF. NO. : 192/1, 192/2 IN SOWRIPALAYAM VILLAGE, COIMBATORE DISTRICT – 641005.

GEODESIGN INDIA PRIVATE LIMITED®

(An ISO 9001 : 2015 Certified Company)

Soil Investigations, SPT Test, DTH, Diamond core drilling, & Grouting works

Old no – 40 , New no – 29 , 8th street , K.K.Pudur, Coimbatore - 38

Ph. 0422 4202452 Mobile : 90433 – 44488

E - mail: geodesign123@gmail.com , Web : www.geodesign.co.in

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

S.NO.	CONTENTS	PAGE NO.
1.	INTRODUCTION	3
	1.1 PURPOSE AND SCOPE	3
	1.2 THE SITE	3
2.	FIELD INVESTIGATIONS	3
	2.1 ROTARY BORING	3
	2.2 STANDARD PENETRATION TEST	4
	2.3 SAMPLING	4
3.	LABOATORY TEST	4
4.	FOUNDATION ANALYSIS	5
	4.1 SOIL PROFILE	5
	4.2 SAFE BEARING CAPACITY	5
5.	RECOMMENDATION	6
6.	REFERENCES	7
7.	ANNEXURE	
	7.1 LOG OF BORINGS	8 - 10
	7.2 LABORATORY TEST RESULTS	11 -13
8.	PHOTOS	14 - 15

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

1. INTRODUCTION

1.1. PURPOSE AND SCOPE

Geotechnical site investigation work for "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF MULTISTORIED BUILDING WITH BASEMENT + G + 10 FLOORS OF PLINTH AREA 12,000 SQ. FT., @ SF. NO. : 583/1 IN UPPLIPALAYAM VILLAGE & SF. NO. : 192/1, 192/2 IN SOWRIPALAYAM VILLAGE, COIMBATORE DISTRICT – 641005." The primary purpose of our investigation is to obtain data to develop foundation design recommendations for the above work. At, first instance, Three boreholes was bored at site. Client's representatives selected the locations of borings. To accomplish these purposes, the following tasks were performed:

1. Detailed soil borings were done up to stratum to explore the sub surface stratigraphy and obtain soil samples for testing. Field and laboratory tests were conducted to evaluate the index and engineering properties of the soils
2. Engineering analysis was performed to develop foundation design information for proposed structure.

1.2. THE SITE

"SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF MULTISTORIED BUILDING WITH BASEMENT + G + 10 FLOORS OF PLINTH AREA 12,000 SQ. FT., @ SF. NO. : 583/1 IN UPPLIPALAYAM VILLAGE & SF. NO. : 192/1, 192/2 IN SOWRIPALAYAM VILLAGE, COIMBATORE DISTRICT – 641005."

2. FIELD INVESTIGATIONS

2.1. ROTARY BORING

Rotary drilling technique was adapted using Calyx machine in this field. In this method, boring is effected by the cutting action of a rotating bit that is kept in firm contact with the bottom of the hole. The bit is attached to the lower end of a hollow drill rod that is rotated by a suitable chuck. Drilling mud (usually Bentonite) is continuously forced down the hollow drill rods. The mud returning upwards though the annular space between the drill rods and the side of the hold bring the cutting to the surface.

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

2.2. STANDARD PENETRATION TEST

It is now most commonly used in site test. The test measures the penetration resistance of the split spoon sampler, when it is driven into the soil, at the bottom of a borehole in a standard manner. The N-value, which is the number of blow required to achieve 300mm penetration of the soil, indicates the relative density of sand or gravel, the consistency of other soil such as silts or clays and the strength of weak rocks. The test is described in IS 2131 - 1981. The split spoon sampler is attached to stiff drill rod and lowered to the bottom of the bore hold. A standard blow consists of dropping a mass of 63.5kg free fall through 750 mm on to an donut hammer at the top of the rods and ensuing that this amount of dynamic energy is transferred to the sampler as much as possible.

The number of blows required to achieve each 150mm penetration is recorded for a fall penetration of 450mm. The initial 150mm penetration is referred to as seating drive and the blows required for this penetration are not considered as this zone is in disturbed soil. The next 300mm of penetration is referred to as the test drive and the number of blows required to achieve this fully is termed the penetration resistance or N-value.

2.3. SAMPLING

Soil samples were collected through Split spoon and rock core sample were collected through single tube core barrel.

3. LABORATORY TESTS

The operations to be performed in the laboratory depend upon the type of the nature of data required for the problem at hand. In case of cohesionless material, like sand, the laboratory tests are usually minimum and the design parameters are worked out from field test data such as form SPT- N value, Core resistance and plate load test data.

In the case of cohesive soils, the programme of laboratory testing can vary from carrying out simple tests such as unconfined tests to comprehensive study of soil behaviour using triaxial shear tests and consolidation tests.

Following laboratory tests are conducted.

For Cohesion & cohesionless soil

a) Specific gravity
b) Sieve analysis
c) Atterberg's limits
d) Natural moisture content.

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

4. FOUNDATION ANALYSIS

4.1 Soil Profile

The profile of the area as observed in the bore hole is given in the chart. The water level is observed far below. The soil layer up to 20.00m depth SOFT ROCK was obtained.

4.2 Safe Bearing Capacity

The bearing capacity of granular soil depends upon the unit weight and angle of internal friction of the soil. These two properties of granular soils are determined by standard penetration tests.

The allowable bearing pressure based on tolerable settlement has been established empirically by Terzaghi and Peck, 1948 and may be expressed by the equation.

Safe bearing capacity (SBC) = $3.5\ (N-3)\ \{(B+0.3)/2B\}^2 \times R_W \times F_D + P$

Where

N = Corrected N value N1

B = Width of Foundation = constant 1

RW = Water Correction = constant 0.5

FD = Depth of Factor = constant 1

P = Over Burden Pressure

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

5. RECOMMENDATION

For the site, "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF MULTISTORIED BUILDING WITH BASEMENT + G + 10 FLOORS OF PLINTH AREA 12,000 SQ. FT., @ SF. NO. : 583/1 IN UPPLIPALAYAM VILLAGE & SF. NO. : 192/1, 192/2 IN SOWRIPALAYAM VILLAGE, COIMBATORE DISTRICT – 641005," the borehole investigation was conducted and SBC was determined.

- In this site, up to 20.00m, SOFT ROCK is obtained.
- The **ISOLATED (OR) RAFT FOUNDATION** is recommended for this site.
- **Rest the Foundation at 5.00m from the Natural Ground Level.**
- The **SBC at 5.00m is 34.30 Ton/m^2** is determined in All Borehole Locations @ Foundation Level.

Note : If water table is encountered

- Use Sulphate (So3) resistant cement for P.C.C, FOOTING, PLINTH BEAM, GRADE BEAM & COLUMN UPTO GROUND LEVEL.
- Use Dewatering method such as Sump Pumping, Well Point Systems, Siphon Draining, Deep Well Systems, Ejector Systems at the time of Earthwork and Footing Concrete.
- The detailed SBC is mentioned in Page No's – 11 – 13.

Er.K.P.VETRISELVAN.,M.E(GEOTECH),MIGS,MISTE.,
GEOTECHNICAL ENGINEER

S.NO	TITLE	ENGINEER'S NAME	SIGNATURE
1	Lab testing	Er.A. Kiruthika	
2	Report prepared by	Er.V. Suganthi	
3	Corrected by	Er.M. Ranjitha	
4	Checked by	Er.A. Sindhuja	
5	Approved by	Er.K.P.Vetriselvan	

Copy right :
This report is the property of GEODESIGN INDIA PRIVATE LIMITED and should not be copied or reproduced without the consent of engineer

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

6. REFERENCES

1. **IS: 1892-1979** – Indian Standard Code of Practice for Determination of Bearing Capacity Of Shallow Foundation

2. **IS: 1892-1979** - Indian Standard Code of Practice for Subsurface Investigation for Foundations

3. **IS: 2131-1981** - Indian Standard Method for Standard Penetration Test for Soils

4. **IS: 8009 (Part 1) - 1976** - Indian Standard Code of Practice for Calculation of Settlements of Foundations

5. **IS: 2720 (Part-2) - 1973** - Indian Standard Methods of Test for Soils, Determination of Water Content

6. **IS: 2720 (Part-4) - 1985** - Indian Standard Methods of Test for Soils, Grain Size Analysis

7. **IS: 2720 (Part-5) – 1985** - Indian Standard Method of Test for Soils, Determination of Liquid and Plastic Limit

8. **IS: 2720 (Part-3/Sec-1)1980** - Indian Standard Methods of Test for Soils, Determination of Specific Gravity.

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

1

Bore Log

Ref: *GEO – G - 239 – 2023-24*

Name of Project: "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF MULTISTORIED BUILDING WITH BASEMENT + G + 10 FLOORS OF PLINTH AREA 12,000 SQ. FT., @ SF. NO. : 583/1 IN UPPLIPALAYAM VILLAGE & SF. NO. : 192/1, 192/2 IN SOWRIPALAYAM VILLAGE, COIMBATORE DISTRICT – 641005."

Soil Investigation done by: GEODESIGN INDIA PRIVATE LIMITED Soil Exploration Consultant, Coimbatore-38

Type of Drilling: Rotary – Mud Circulation LOCATION – 1

G.W.T-8.00m

Bore hole No. : 1

Date of commencement : 13.02.2024
Date of completion : 14.02.2024

Depth below G.L	Soil Profile	Description of Soil	Thickness of layer (m)	Standard penetration test data: Depth at which test is conducted	N – Value- Depth of penetration: 15cm	30cm	45cm	For 30cm	Relative density / Consistency	Graphical representation of penetration resistance
1.10		**Filling Soil**	**1.10**							
1.80		**Clay**	**0.70**	1.50	5	4	7	11	Stiff	
				3.00	7	9	11	20	Medium	
5.10		**Poorly Graded Gravel**	**3.30**	4.50	18	21	21	42	Dense	
				6.00	46	50	50/8	>50	V.Dense	
				7.50	50/11	-	-	>50	V.Dense	
				9.00	>50	-	-	>50	V.Dense	
				10.50	>50	-	-	>50	V.Dense	
		Soft Disintegrated Rock	**13.40**	12.00	>50	-	-	>50	V.Dense	
				13.50	>50	-	-	>50	V.Dense	
				15.00	>50	-	-	>50	V.Dense	
				16.50	>50	-	-	>50	V.Dense	
18.50				18.00	>50	-	-	>50	V.Dense	
		Soft Rock	**1.50**							
20.00m		End of Bore hole								

Contd...2

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

2

Bore Log

Ref: *GEO – G - 239 – 2023-24*

Name of Project: "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF MULTISTORIED BUILDING WITH BASEMENT + G + 10 FLOORS OF PLINTH AREA 12,000 SQ. FT., @ SF. NO. : 583/1 IN UPPLIPALAYAM VILLAGE & SF. NO. : 192/1, 192/2 IN SOWRIPALAYAM VILLAGE, COIMBATORE DISTRICT – 641005."

Soil Investigation done by: GEODESIGN INDIA PRIVATE LIMITED Soil Exploration Consultant, Coimbatore-38

Type of Drilling: Rotary – Mud Circulation LOCATION – 2

G.W.T- 9.00m

Bore hole No. : 2

Date of commencement : 14.02.2024
Date of completion : 15.02.2024

Depth below G.L	Soil Profile	Description of Soil	Thickness of layer (m)	Standard penetration test data: Depth at which test is conducted	N – Value- Depth of penetration: 15cm	30cm	45cm	For 30cm	Relative density / Consistency	Graphical representation of penetration resistance
0.90		**Filling Soil**	**0.90**							
2.20		**Clay**	**1.30**	1.50	4	4	5	9	Stiff	
				3.00	11	14	21	35	Dense	
4.70		**Poorly Graded Gravel**	**2.50**	4.50	18	20	28	48	Dense	
				6.00	>50	-	-	>50	V.Dense	
				7.50	>50	-	-	>50	V.Dense	
				9.00	>50	-	-	>50	V.Dense	
				10.50	>50	-	-	>50	V.Dense	
		Soft Disintegrated Rock	**15.30**	12.00	>50	-	-	>50	V.Dense	
				13.50	>50	-	-	>50	V.Dense	
				15.00	>50	-	-	>50	V.Dense	
				16.50	>50	-	-	>50	V.Dense	
				18.00	>50	-	-	>50	V.Dense	
20.00m		End of Bore hole		20.00	>50	-	-	>50	V.Dense	

Graphical representation of penetration resistance: 0 20 40 60 80 100

Contd...3

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

3

Bore Log

Ref: *GEO – G - 239 – 2023-24*

Name of Project: "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF MULTISTORIED BUILDING WITH BASEMENT + G + 10 FLOORS OF PLINTH AREA 12,000 SQ. FT., @ SF. NO. : 583/1 IN UPPLIPALAYAM VILLAGE & SF. NO. : 192/1, 192/2 IN SOWRIPALAYAM VILLAGE, COIMBATORE DISTRICT – 641005."

Soil Investigation done by: GEODESIGN INDIA PRIVATE LIMITED Soil Exploration Consultant, Coimbatore-38


Type of Drilling: Rotary – Mud Circulation LOCATION – 3

G.W.T-8.00m

Bore hole No. : 3

Date of commencement : 16.02.2024
Date of completion : 17.02.2024

Depth below G.L	Soil Profile	Description of Soil	Thickness of layer (m)	Standard penetration test data: Depth at which test is conducted	N – Value- Depth of penetration: 15cm	30cm	45cm	For 30cm	Relative density / Consistency	Graphical representation of penetration resistance
0.80		Filling Soil	0.80							
2.10		Clay	1.30	1.50	5	7	8	15	Stiff	
				3.00	8	14	16	30	Dense	
4.90		Poorly Graded Gravel	2.80	4.50	15	21	23	44	Dense	
				6.00	>50	-	-	>50	V.Dense	
				7.50	50/11	-	-	>50	V.Dense	
				9.00	>50	-	-	>50	V.Dense	
				10.50	>50	-	-	>50	V.Dense	
		Soft Disintegrated Rock	15.10	12.00	>50	-	-	>50	V.Dense	
				13.50	>50	-	-	>50	V.Dense	
				15.00	>50	-	-	>50	V.Dense	
				16.50	>50	-	-	>50	V.Dense	
				18.00	>50	-	-	>50	V.Dense	
20.00m		End of Bore hole		20.00	>50	-	-	>50	V.Dense	

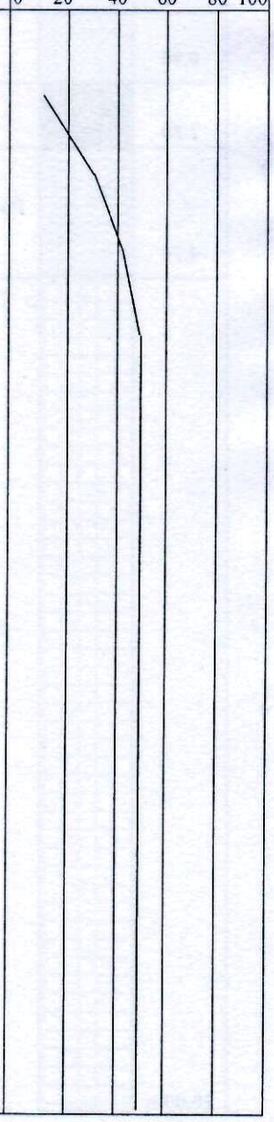

Geotechnical Engineer

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

Ref: *GEO – G - 239 – 2023-24*

SOIL TEST RESULTS

Name of Project: "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF MULTISTORIED BUILDING WITH BASEMENT + G + 10 FLOORS OF PLINTH AREA 12,000 SQ. FT., @ SF. NO. : 583/1 IN UPPLIPALAYAM VILLAGE & SF. NO. : 192/1, 192/2 IN SOWRIPALAYAM VILLAGE, COIMBATORE DISTRICT – 641005."

GEODESIGN INDIA PRIVATE LIMITED Soil Exploration Consultant, Coimbatore-38	BORE NUMBER - 1	LOCATION : 1	GROUND WATER LEVEL: 8.00m	COMMENCEMENT OF LAB TESTING 19.02.2024	COMPLETION OF LAB TESTING 22.02.2024

SOIL PROFILE AND DEPTH IN METRES	DEPTH OF SAMPLING (m)	IS SOIL CLASSIFICATION	NATURAL WET DENSITY (kN/m³)	NATURAL MOISTURE CONTENT %	INDEX TEST			SIEVE ANALYSIS % PASSING IS SIEVE ANALYSIS				SPECIFIC GRAVITY	SHEAR TEST		STANDARD PENETRATION TEST				CONSOLIDATION TEST			
					LIQUID LIMIT (%)	PLASTIC LIMIT (%)	PLASTICITY INDEX (%)	% of GRAVEL	% of SAND	% of SILT	% of CLAY		COHESION C (Ton / m²)	ANGLE OF INTERNAL FRICTION °	DEPTH OF TESTING (m)	OBSERVED N VALUE	CORRECTED N VALUE	SAFE BEARING CAPACITY (T/m²)	COMPRESSION INDEX C_c	PRE-CONSOLIDATION PRESSURE (kg/cm²)	INITIAL VOIDS RATIO	CO-EFFECT OF CONSOLIDATION C_v (cm²/sec)
		FS	-	-	-	-	-	-	-	-	-	-	-	-	1.50	11	11	6.96				
	1.10														3.00	20	20	14.66	-	-	-	-
															4.50	42	42	31.98				
		CL	18.27	16.12	32	20	12	7	20	73		2.73	2.4	-	6.00	>50	50	38.95	-	-	-	-
	1.80														7.50	>50	50	40.00				
		GP	22.34	11.93	-	-	-	44	35	21		2.63	-	32	9.00	>50	50	41.05				
															10.50	>50	50	42.10	-	-	-	-
	5.10														12.00	>50	50	43.15				
															13.50	>50	50	44.20				
															15.00	>50	50	45.25				
															16.50	>50	50	46.30				
															18.00	>50	50	47.35				
		SDR	-	-	-	-	-	-	-	-	-	-	-	-					-	-	-	-
	18.50																					
		SR	-																-	-	-	-
	20.00																					

Depth (m)	Core Recovery (%)	Rock Quality Designation (%)	Allowable Bearing Pressure (Ton/m²)
18.50 – 20.00	18.6	17.3	89

FS – FILLING SOIL, CL – LOW PLASTICITY CLAY, GP – POORLY GRADED GRAVEL, SDR – SOFT DISINTEGRATED ROCK, SR – SOFT ROCK.

Contd…2

For SREE SHARADHAMBAL FOUNDATIONS

Partner

For SREE SHARADHAMBAL FOUNDATIONS

Partner

Ref: *GEO – G - 239 – 2023-24*

SOIL TEST RESULTS

Name of Project: "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF MULTISTORIED BUILDING WITH BASEMENT + G + 10 FLOORS OF PLINTH AREA 12,000 SQ. FT., @ SF. NO. : 583/1 IN UPPLIPALAYAM VILLAGE & SF. NO. : 192/1, 192/2 IN SOWRIPALAYAM VILLAGE, COIMBATORE DISTRICT – 641005."

GEODESIGN INDIA PRIVATE LIMITED Soil Exploration Consultant, Coimbatore-38	BORE NUMBER - 2	LOCATION : 2	GROUND WATER LEVEL: 9.00m	COMMENCEMENT OF LAB TESTING 19.02.2024	COMPLETION OF LAB TESTING 22.02.2024

SOIL PROFILE AND DEPTH IN METRES	DEPTH OF SAMPLING (m)	IS SOIL CLASSIFICATION	NATURAL WET DENSITY (kN/m³)	NATURAL MOISTURE CONTENT %	INDEX TEST			SIEVE ANALYSIS % PASSING IS SIEVE ANALYSIS				SPECIFIC GRAVITY	SHEAR TEST		STANDARD PENETRATION TEST				CONSOLIDATION TEST			
					LIQUID LIMIT (%)	PLASTIC LIMIT (%)	PLASTICITY INDEX (%)	% of GRAVEL	% of SAND	% of SILT	% of CLAY		COHESION C (Ton / m²)	ANGLE OF INTERNAL FRICTION °	DEPTH OF TESTING (m)	OBSERVED N VALUE	CORRECTED N VALUE	SAFE BEARING CAPACITY (T/m²)	COMPRESSION INDEX C_c	PRE - CONSOLIDATION PRESSURE (kg/cm²)	INITIAL VOIDS RATIO	CO-EFFECT OF CONSOLIDATION C_v (cm²/sec)
		FS	-	-	-	-	-	-	-	-	-	-	-	-	1.50	9	9	5.48				
	0.90														3.00	35	35	25.76	-	-	-	-
		CL	16.49	13.75	33	21	12	9	15	76		2.75	2.8	-	4.50	48	48	36.42				
	2.20														6.00	>50	50	38.95	-	-	-	-
		GP	17.28	14.01	-	-	-	47	31	22		2.66	-	35	7.50	>50	50	40.00				
	4.70														9.00	>50	50	41.05	-	-	-	-
															10.50	>50	50	42.10				
															12.00	>50	50	43.15				
															13.50	>50	50	44.20				
															15.00	>50	50	45.25				
		SDR	-	-	-	-	-	-	-	-	-	-	-	-	16.50	>50	50	46.30	-	-	-	-
															18.00	>50	50	47.35				
															20.00	>50	50	48.75				
	20.00																					

FS – FILLING SOIL, CL – LOW PLASTICITY CLAY, GP – POORLY GRADED GRAVEL, SDR – SOFT DISINTEGRATED ROCK.

Contd…3

For SREE SHARADHAMBAL FOUNDATIONS

Partner

For SREE SHARADHAMBAL FOUNDATIONS

Partner

3

Ref: *GEO – G - 239 – 2023-24*

SOIL TEST RESULTS

Name of Project: "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF MULTISTORIED BUILDING WITH BASEMENT + G + 10 FLOORS OF PLINTH AREA 12,000 SQ. FT., @ SF. NO. : 583/1 IN UPPLIPALAYAM VILLAGE & SF. NO. : 192/1, 192/2 IN SOWRIPALAYAM VILLAGE, COIMBATORE DISTRICT – 641005."

GEODESIGN INDIA PRIVATE LIMITED Soil Exploration Consultant, Coimbatore-38	BORE NUMBER - 3	LOCATION : 3	GROUND WATER LEVEL: 8.00m	COMMENCEMENT OF LAB TESTING 19.02.2024	COMPLETION OF LAB TESTING 22.02.2024

SOIL PROFILE AND DEPTH IN METRES	DEPTH OF SAMPLING (m)	IS SOIL CLASSIFICATION	NATURAL WET DENSITY (kN/m³)	NATURAL MOISTURE CONTENT %	INDEX TEST			SIEVE ANALYSIS % PASSING IS SIEVE ANALYSIS				SPECIFIC GRAVITY	SHEAR TEST		STANDARD PENETRATION TEST				CONSOLIDATION TEST			
					LIQUID LIMIT (%)	PLASTIC LIMIT (%)	PLASTICITY INDEX (%)	% of GRAVEL	% of SAND	% of SILT	% of CLAY		COHESION C (Ton / m²)	ANGLE OF INTERNAL FRICTION °	DEPTH OF TESTING (m)	OBSERVED N VALUE	CORRECTED N VALUE	SAFE BEARING CAPACITY (T/m²)	COMPRESSION INDEX Cc	PRE - CONSOLIDATION PRESSURE (kg/cm²)	INITIAL VOIDS RATIO	CO-EFFECT OF CONSOLIDATION Cv (cm²/sec)
		FS	-	-	-	-	-	-	-	-	-	-	-	-	1.50	15	15	9.92				
	0.80														3.00	30	30	22.06	-	-	-	-
		CL	19.14	16.56	34	20	14	4	25	71		2.70	2.3	-	4.50	44	44	33.46				
	2.10														6.00	>50	50	38.95	-	-	-	-
		GP	20.83	13.92	-	-	-	41	29	30		2.64	-	33	7.50	>50	50	40.00				
	4.90														9.00	>50	50	41.05	-	-	-	-
															10.50	>50	50	42.10				
															12.00	>50	50	43.15				
															13.50	>50	50	44.20				
															15.00	>50	50	45.25				
		SDR	-	-	-	-	-	-	-	-	-	-	-	-	16.50	>50	50	46.30	-	-	-	-
															18.00	>50	50	47.35				
															20.00	>50	50	48.75				
	20.00																					

FS – FILLING SOIL, CL – LOW PLASTICITY CLAY, GP – POORLY GRADED GRAVEL, SDR – SOFT DISINTEGRATED ROCK.

Geotechnical Engineer

Soil Exploration Report For M/s. PREMIER HI TECH INDUSTRIES PVT. LTD., M/s. PREMIER PUMPS, M/s. PREMIER ENGINEERING, UPPLIPALAYAM VILLAGE & SOWRIPALAYAM VILLAGE, COIMBATORE DISTRICT – 641005.

For SREE SHARADHAAMBAL FOUNDATIONS


Partner

For SREE SHARADHAAMBAL FOUNDATIONS

Partner

8. PHOTOS

Borehole Location – 1

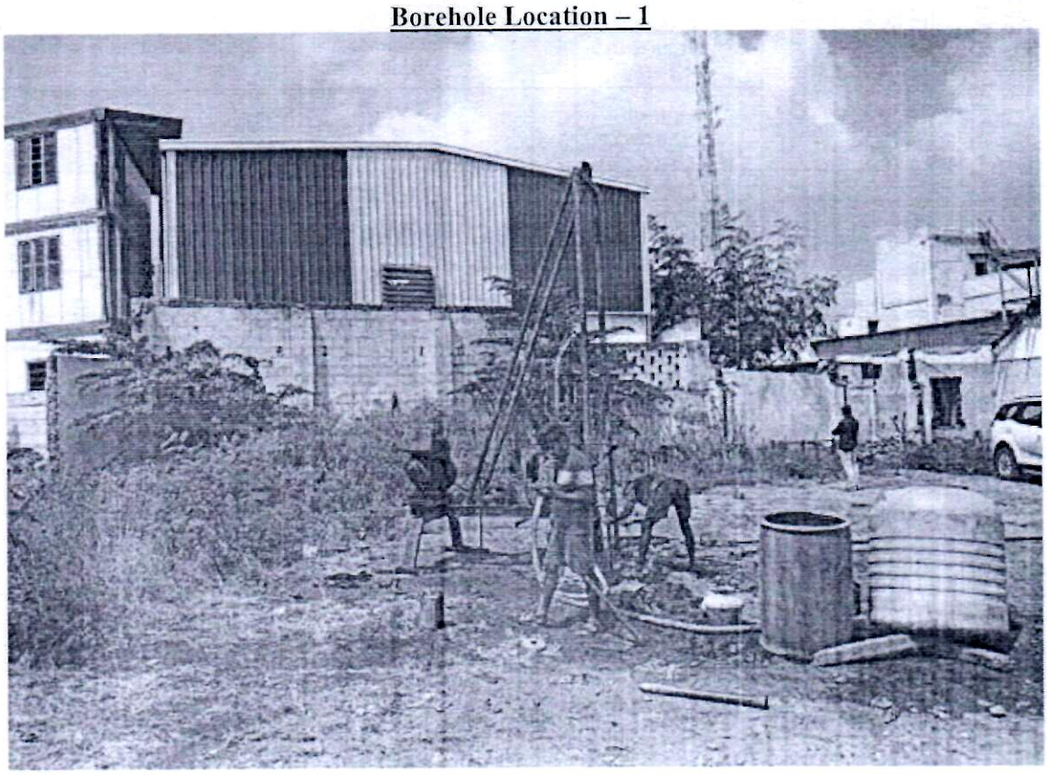

Borehole Location – 2




For SREE SHARADHA AMBAL FOUNDATIONS

Partner

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

Borehole Location – 3

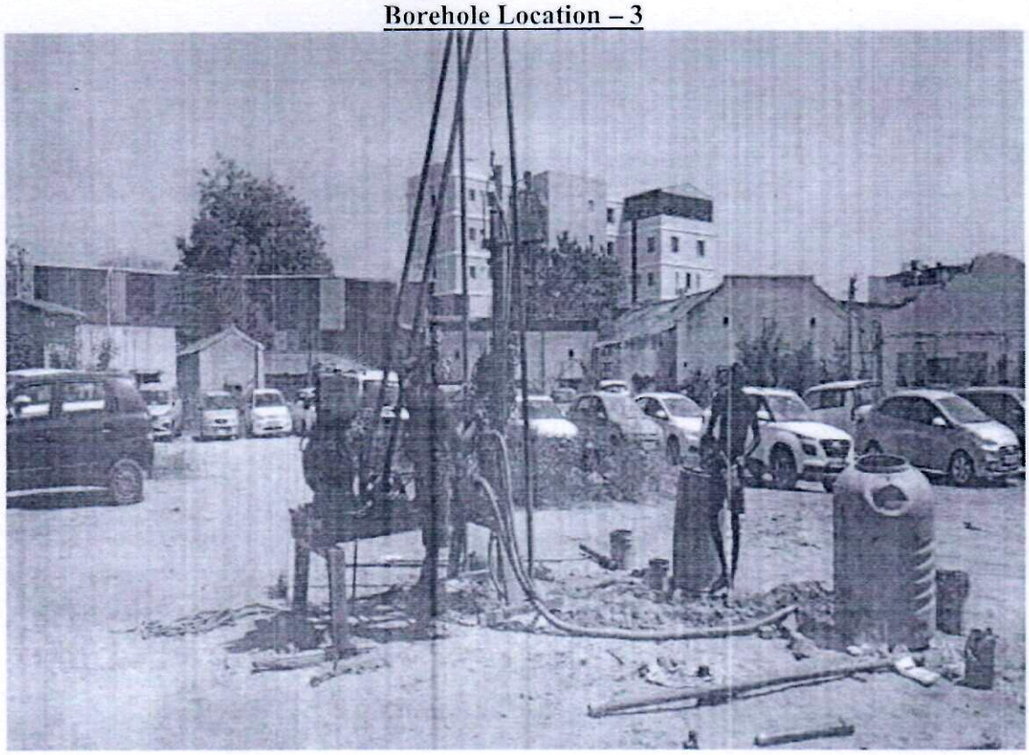

Er.K.P.VETRISELVAN.,M.E(GEOTECH),MIGS,MISTE.,
GEOTECHNICAL ENGINEER

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

For SREE SHARADHA AMBAL FOUNDATIONS

Partner

सत्यमेव जयते

Government of India

Form GST REG-06

[See Rule 10(1)]

Registration Certificate

Registration Number : 33AFBFS2120M1Z8

1.	**Legal Name**	SREE SHARADHA AMBAL FOUNDATIONS			
2.	**Trade Name, if any**	SREE SHARADHA AMBAL FOUNDATIONS			
3.	**Additional trade names, if any**				
4.	**Constitution of Business**	Partnership			
5.	**Address of Principal Place of Business**	**Building No./Flat No.:** 33 **Road/Street:** Trichy Road **Locality/Sub Locality:** Sundaresa Iyer Layout **City/Town/Village:** Coimbatore **District:** Coimbatore **State:** Tamil Nadu **PIN Code:** 641018			
6.	**Date of Liability**				
7.	**Period of Validity**	From	22/01/2025	To	Not Applicable
8.	**Type of Registration**	Regular			
9.	**Particulars of Approving**	Tamil Nadu			

Signature

Signature valid
Digitally signed by [illegible] GOODS AND SERVICES TAX NETWORK 15
Date: 2025.01.22 18:00:11 IST

Name	SARAVANAKUMAR
Designation	Assistant Commissioner
Jurisdictional Office	TRICHY ROAD
Date of issue of Certificate	22/01/2025

Note: The registration certificate is required to be prominently displayed at all places of business in the State.

This is a system generated digitally signed Registration Certificate issued based on the approval of application granted on 22/01/2025 by the jurisdictional authority.

Goods and Services Tax

Annexure A



Goods and Services Tax Identification Number: 33AFBFS2120M1Z8

Details of Additional Place of Business(s)

Legal Name	SREE SHARADHA AMBAL FOUNDATIONS
Trade Name, if any	SREE SHARADHA AMBAL FOUNDATIONS

Total Number of Additional Places of Business in the State **0**

Goods and Services Tax

Annexure B

सत्यमेव जयते

Goods and Services Tax Identification Number: 33AFBFS2120M1Z8

Legal Name	SREE SHARADHA AMBAL FOUNDATIONS
Trade Name, if any	SREE SHARADHA AMBAL FOUNDATIONS

Details of Managing / Authorized Partners

1		Name	ANNAMALAI VENKET ANNAMALAI
		Designation/Status	Partner
		Resident of State	Tamil Nadu
2		Name	PADMANABAN BALASWAMY
		Designation/Status	Partner
		Resident of State	Tamil Nadu

Goods and Services Tax



தமிழ்நாடு तमिलनाडु TAMILNADU

CZ 914082

23.05.2023 SREE SARADHAMBAL FOUNDATIONS
COIMBATORE

S. தாட்சாயிணி,
(S. DHATCHAYINI)
STAMP VENDOR
L. No: 928/ஆ1/2021-4
10 C, SBI Road, Coimbatore - 18.

SREE SHARADHA AMBAL FOUNDATIONS,

COIMBATORE

Agreement of Partnership entered into this 23'rd day of MAY 2023, between Mr. Venkat Annamalai Son of Mr. SP.Annamalai residing at 33,Sundaresa Layout, Trichy Road, Coimbatore -641 018 of the First part; and Mr.P.Balasamy Son of Mr. V.B. Padmanaban residing at No.6, Srivari Praneet, Red Fields, Coimbatore - 641 018 of the Second Part.

Whereas the parties are desirous of reducing the terms and conditions governing and Partnership in to writing.

V. Annamalai.

A. M



தமிழ்நாடு तमिलनाडु TAMILNADU

CZ 914083

S. தாட்சாயினி,
(S. DHATCHAYINI)
STAMP VENDOR
L. No: 928/அ1/2021-4
10 C, SBI Road, Coimbatore - 18.

23.05.2023 SREE SARADHAMBAL FOUNDATIONS
COIMBATORE

NOW THIS DEED WITNESSED AS FOLLOWS

1. The name of the Partnership is "SREE SHARADHA AMBAL FOUNDATIONS' or such name or names that may be agreed upon from time to time by the parties there to.

2. The business of partnership shall be carried at No.33, Sundaresa Layout, Trichy road, Coimbatore – 641018.

3. The business of the firm shall be that Real Estate, Construction, Promotion, Land & Building and Other Trading Activities.

V. Annamalai.



தமிழ்நாடு तमिलनाडु TAMILNADU

CZ 914084

S. தாட்சாயினி,
(S. DHATCHAYINI)
STAMP VENDOR
L. No: 928/ஆ1/2021-4
10 C, SBI Road, Coimbatore - 18.

23.05.2023 SREE SARADHAMBAL FOUNDATIONS
COIMBATORE

4. The principal place of this business shall be at Coimbatore. The parties mutual consent may carry on such other business and such other places also.

5. The capital of the partnership firm shall be Rupees Two Lakhs which shall be contributed by the parties as follows:

(a) Party of the First part Rs. 1,40,000/=

(b) Party of the Second part Rs. 60,000/=

V. Annamalai.

6. The firm shall pay 15% per annum to the partners on the amount of the capital contribution and loans if any advanced by each of them respectively and the profit or losses of the business of the firm shall be arrived at after for interest so payable as a expenditure of the firm.

7. The business of the partnership shall be managed by party of the First part Mr. Venkat Annamalai , who is authorized to enter in to contracts , operate bank accounts jointly or separately , borrow from banks and outsiders under offer of security or otherwise as circumstances demand , attend to court and Government offices, employ persons to attend to day to day running of the business, dismiss them if found unfit , authorize persons to attend to court and to Government offices and represent the firm and generally do everything to carry on the business to the best of advantage.

8. The accounts of the firm shall be closed on 31'st March of every year.

9. And the profit or loss ascertained shall be divided between the partners in the following manner :

(a) First part - Mr. Venkat Annamalai - 70%

(b) Second part - Mr. P.Balasamy - 30%

10. Death or retirement of the partners shall not dissolve the partnership but shall be continued to be carried on by the

remaining other partner with or without admitting the legal heirs of the deceased partners.

11. None of the partner shall without the written consent of the other assigns of change his interest in the firm.

12. This is a partnership at will.

13. All matters which are not specified here shall be governed by the Provisions of the Indian Partnership Act ,1932.

14. All the partners jointly can borrow from banks for any fund requirement at any time as they deem fit.

V. Annamalai.

A. M.

15 . All the partners jointly can appoint a Power of Attorney for any specific purpose at any time of requirement.

IN WITNESS WHEREOF the parties they have signed this day and your above mentioned.

WITNESS:

1) S.R.L

S.RAMESH KRISHNAN
S/O SELVARAJ
NO:42, SREE RAMAJEYAM AVENUE
SOLAKATTUPALAYAM
COIMBATORE

2)

J. NIROJA
D/O Joseph
No. 95 Siddhathottam
Krishna Raya colony
Ganapathy
Coimbatore

THE LANDLENS SUITE

Eight ways to know a piece of land before you pay for it.

This report covers one part of the picture. These cover the rest, drawn from the same government records, for any property in Tamil Nadu.

LandLens One
Ask anything about a property and get an answer grounded in live government records, with the sources shown.
/landlens/one

Verify My Land
Every record check run on one property and returned as a single report.
/landlens/verify-my-land

Legal Opinion
An advocate's written opinion on the title, built on the records we pull for it.
/landlens

One Map
Every layer on one map: the parcel, its boundary, zoning, water bodies and what sits around it.
/landlens/one/map

PriceMap
What land actually changed hands for around this plot, taken from the registered deeds.
/landlens/pricemap

Build Scope
What you are allowed to build here: floor space, height, coverage and setbacks.
/landlens/build-scope

Property Tracker
Watch a property and hear about it when something new is registered against it.
/landlens/property-tracker

Deal Room
Run the transaction in one place: documents, stamping, signatures and the parties.
/landlens/deal-room

FREE TOOLS · NO ACCOUNT NEEDED

Twenty-four checks you can run yourself, at no cost.

Records and verification

The registers themselves, read for you.

- Encumbrance Certificate
- Patta and Chitta
- Field Measurement Sketch
- EC Analyzer
- Bank charge check
- Court case search
- Seller background check
- Approval check by survey

Value and duty

What it is worth and what it costs to register.

- Guideline value by street
- Guideline value by survey
- Stamp duty and registration fees
- Capital gains
- Floor space index
- Area unit converter

Zoning and land use

What the plan says can happen on this land.

- Land use zone finder
- CMDA land use check
- Coastal regulation zone
- Master plan check
- Water bodies finder
- Airport height clearance

Registers and directories

Who holds it, and which office keeps the record.

- Find your registering office
- Temple property check
- Waqf property check
- RERA register

Every free tool
/tools

Services we run for you
/services

The LandLens suite
/landlens/one

Verified RealEstate™

Every claim in this document traces back to a government record.

- Legal opinions, due diligence and title verification
- Building plan, layout and sub-division approvals
- Completion and occupancy certificates, regularisation
- Escrow, negotiation and NRI property management
- Land survey, soil testing, architecture and construction

Verified RealEstate
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India
hello@verified.realestate
+91 9996 12 9996

Prepared from the registers named on the page each finding sits on. Where a register could not be read, this document says so in its place rather than leaving the gap to be read as a clean result.