Verified RealEstate™

RE REGULATORY RECORD

RERA Document

The document as the regulator published it, reproduced in full behind this page.

Published for reference. The authority's own register is the operative record.

Verified RealEstate™
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India

hello@verified.realestate
+91 9996 12 9996
verified.realestate

C.KANNAN, M.E. (Structure)
STRUCTURAL ENGINEER

Door .21, plot No. 257- W, Flat No. 2B
"Utopia Apartments" 2nd Floor,
4th Main Road, Indira Nagar,
Chennai- 600 020
Mobile: 9841249815
Email: kannankds2007@gmail.com

03-02-2025

STRUCTURAL STABILITY CERTIFICATE

It is certified that the Proposed Residential Building at Old D.No:21,New D.No:14,Gilchrist Avenue,Chetpet,Chennai-600031 Comprised In Old R.S Nos:321/1 And 366/1.T.S.No:321/30 Of Block No:18, Egmore Taluk,Greater Chennai Corporation Division No:107,Zone-VIII Having Stilt plus Five upper floors is designed to resist earthquake. Check has been made safe and sound, I hereby certify that,

1. The minimum column width is 300 in stilt floor areas
2. The minimum grade of concrete is M25.
3. The design analysis using the code of practice for loading Standards as per IS-875 Part I to III and seismic force as per one code IS 1893, is carried out.

The Structure is safe and sound when used for the purpose for which it is designed.

C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

PROPOSED RESIDENTIAL BUILDING AT OLD D.NO:21,NEW D.NO:14,GILCHRIST AVENUE,CHETPET,CHENNAI-600031 COMPRISED IN OLD R.S NOS:321/1 AND 366/1.T.S.NO:321/30 OF BLOCK NO:18, EGMORE TALUK,GREATER CHENNAI CORPORATION DIVISION NO:107,ZONE-VIII

GENERAL NOTE ON STRUCTURAL DESIGN.

1.0 GENERAL.

1.1 DESIGN BASIS

The proposed residential building consists of Stilt plus Five upper floors.

The design of this building is carried out based on frame analysis using STAAD CONNECT.

1.2 CODES AND STANDARDS

All structural design is carried out conforming to the provisions of National Building Code of India and other relevant Indian Codes and Standards.

1. I.S. 456 - 2000
2. I.S. 875 - Part I to III
3. I.S.1893 - 2016

2.0 BASIC CIVIL DESIGN LOADS

2.1 DEAD LOADS & LIVE LOADS

Typical slab dead load is calculated as follows

Self weight of slab	=	3.25kN/m²
Floor finish	=	2.0kN/m²
Live load	=	2.0kN/m²
		7.25kN/m²

C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

3.0 SOIL DETAILS

Based on soil test report Shallow Foundation is adopted.

DESIGN METHODS

General design and detailing of concrete members/elements are done conforming to the provisions of I.S: 456 and other relevant I.S codes. Limit State method is followed for the design.

Seismic Zone III load is taken into account for the analysis. The predominant direction of vibration is horizontal. Relevant combination of forces has been taken into account.

4.1

Load Combination	Ultimate Limit Load	Serviceability Limit State
DL+LL+WL	1.2DL+1.2LL+1.2WL	DL+LL+WL
Or	Or	or
DL+LL+EL	1.2DL+1.2LL+1.2EL	DL+LL+EL

4.3 **MINIMUM COVER**

Slab	15 mm
Beam	25 mm
Columns	40 mm
Foundations	50 mm

The Structure is safe and sound when used for the purpose for which it is designed.

C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

```
**************************************************
*                                                *
*          STAAD.Pro CONNECT Edition             *
*          Version  22.12.00.142                 *
*          Proprietary Program of                *
*          Bentley Systems, Inc.                 *
*          Date=    FEB  3, 2025                 *
*          Time=    12:40:24                     *
*                                                *
*  Licensed to: C.Kannan                         *
**************************************************
```

```
    1. STAAD SPACE
INPUT FILE: D:\LOGESH\STABILITY CERTIFICATE\PUSHKAR-GILCHRIST\PUSHKAR-G.. .STD
    2. START JOB INFORMATION
    3. ENGINEER DATE 03-FEB-25
    4. JOB NAME PROP[OSED RESIDENTIAL BUILDING AT OLD NO.21,NEW NO.14,GILCHRIST -
    5. AVENUE, CHETPET,CHENNAI-600031
    6. ENGINEER NAME KANNAN
    7. CHECKER NAME KANNAN
    8. APPROVED NAME KANNAN
    9. CHECKER DATE 2/3/2025
   10. APPROVED DATE 2/3/2025
   11. END JOB INFORMATION
   12. INPUT WIDTH 79
   13. UNIT MMS KN
   14. JOINT COORDINATES
   15. 1 0 0 0; 2 3157.83 0 0; 3 8720.43 0 0; 4 11885.5 0 0; 5 0 3000 0
   16. 6 3157.83 3000 0; 7 8720.43 3000 0; 8 11885.5 3000 0; 9 0 6000 0
   17. 10 3157.83 6000 0; 11 8720.43 6000 0; 12 11885.5 6000 0; 13 0 9000 0
   18. 14 3157.83 9000 0; 15 8720.43 9000 0; 16 11885.5 9000 0; 17 0 12000 0
   19. 18 3157.83 12000 0; 19 8720.43 12000 0; 20 11885.5 12000 0; 21 0 15000 0
   20. 22 3157.83 15000 0; 23 8720.43 15000 0; 24 11885.5 15000 0; 25 0 18000 0
   21. 26 3157.83 18000 0; 27 8720.43 18000 0; 28 11885.5 18000 0; 29 0 -3000 0
   22. 30 3157.83 -3000 0; 31 8720.43 -3000 0; 32 11885.5 -3000 0
   23. MEMBER INCIDENCES
   24. 1 1 2; 2 2 3; 3 3 4; 4 1 5; 5 2 6; 6 3 7; 7 4 8; 8 5 6; 9 6 7; 10 7 8; 11 5 9
   25. 12 6 10; 13 7 11; 14 8 12; 15 9 10; 16 10 11; 17 11 12; 18 9 13; 19 10 14
   26. 20 11 15; 21 12 16; 22 13 14; 23 14 15; 24 15 16; 25 13 17; 26 14 18; 27 15 19
   27. 28 16 20; 29 17 18; 30 18 19; 31 19 20; 32 17 21; 33 18 22; 34 19 23; 35 20 24
   28. 36 21 22; 37 22 23; 38 23 24; 39 21 25; 40 22 26; 41 23 27; 42 24 28; 43 25 26
   29. 44 26 27; 45 27 28; 46 1 29; 47 2 30; 48 3 31; 49 4 32
   30. UNIT METER KN
   31. DEFINE MATERIAL START
   32. ISOTROPIC CONCRETE
   33. E 2.17185E+07
   34. POISSON 0.17
   35. DENSITY 23.5616
   36. ALPHA 1E-05
   37. DAMP 0.05
   38. G 9.28139E+06
```

C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

STAAD SPACE -- PAGE NO. 2

```
39. TYPE CONCRETE
40. STRENGTH FCU 27579
41. END DEFINE MATERIAL
42. MEMBER PROPERTY
43. 1 TO 3 8 TO 10 15 TO 17 22 TO 24 29 TO 31 36 TO 38 43 TO 45 PRIS YD 0.6 ZD 0.23
44. 4 TO 7 11 TO 14 18 TO 21 25 TO 28 32 TO 35 39 TO 42 46 TO 48 -
45. 49 PRIS YD 0.6 ZD 0.23
46. CONSTANTS
47. MATERIAL CONCRETE ALL
48. SUPPORTS
49. 29 TO 32 FIXED
50. DEFINE IS1893 2016 LOAD
51. ZONE 0.16 RF 5 I 1.2 SS 1 ST 1 DM 0.05 DT 3
52. SELFWEIGHT 1
53. MEMBER WEIGHT
54. 1 TO 3 8 TO 10 15 TO 17 22 TO 24 29 TO 31 36 TO 38 43 TO 45 UNI 30 0 0
55. 1 TO 3 8 TO 10 15 TO 17 22 TO 24 29 TO 31 36 TO 38 43 TO 45 UNI 10 0 0
56. DEFINE WIND LOAD

*** NOTE: If any floor diaphragm is present in the model Wind Load definition
          should be defined after Floor Diaphragm definition. Otherwise wind
          load generation may be unsuccessful during analysis.

57. TYPE 1 WIND 1
58. <! STAAD PRO GENERATED DATA DO NOT MODIFY !!!
59. CUSTOM:PARAMS
60. !> END GENERATED DATA BLOCK
61. INT 1.35 1.49 1.54 HEIG  10  15  18
62. EXP 1 JOINT 1 TO 32
63. LOAD 1 LOADTYPE NONE  TITLE EQ +X
64. 1893 LOAD X 1
65. LOAD 2 LOADTYPE NONE  TITLE EQ -X
66. 1893 LOAD X -1.
67. LOAD 3 LOADTYPE NONE  TITLE EQ +Z
68. 1893 LOAD Z 1
69. LOAD 4 LOADTYPE NONE  TITLE EQ -Z
70. 1893 LOAD Z -1.
71. LOAD 5 LOADTYPE NONE  TITLE WIND +X
72. WIND LOAD X 1 TYPE 1
*WARNING- NO MEMBERS LOADED FOR A WIND LOAD GENERATION.
73. LOAD 6 LOADTYPE NONE  TITLE WIND -X
```

STAAD SPACE -- PAGE NO. 3

```
  74. WIND LOAD -X 1 TYPE 1
*WARNING- NO MEMBERS LOADED FOR A WIND LOAD GENERATION.
  75. LOAD 7 LOADTYPE NONE  TITLE WIND +Z
  76. WIND LOAD Z 1 TYPE 1
  77. LOAD 8 LOADTYPE NONE  TITLE WIND -Z
  78. WIND LOAD -Z 1 TYPE 1
  79. LOAD 9 LOADTYPE NONE  TITLE LIVE LOAD
  80. MEMBER LOAD
  81. 1 TO 3 8 TO 10 15 TO 17 22 TO 24 29 TO 31 36 TO 38 43 TO 45 UNI GY -10
  82. LOAD 10 LOADTYPE NONE  TITLE DEAD LOAD
  83. SELFWEIGHT Y -1
  84. MEMBER LOAD
  85. 1 TO 3 8 TO 10 15 TO 17 22 TO 24 29 TO 31 36 TO 38 43 TO 45 UNI GY -30
  86. LOAD COMB 11 1.5(DL+IL)
  87. 9 1.5 10 1.5
  88. LOAD COMB 12 1.2(DL+IL+ELX)
  89. 9 1.5 10 1.2 1 1.2
  90. LOAD COMB 13 1.2(DL+IL-ELX)
  91. 9 1.2 10 1.2 2 1.2
  92. LOAD COMB 14 1.2(DL+IL+ELZ)
  93. 9 1.2 10 1.2 3 1.2
  94. LOAD COMB 15 1.2(DL+IL-ELZ)
  95. 9 1.2 10 1.2 4 1.2
  96. LOAD COMB 16 1.2(DL+IL+WLX)
  97. 9 1.2 10 1.2 5 1.2
  98. LOAD COMB 17 1.2(DL+IL-WLX)
  99. 10 1.2 6 1.2
 100. LOAD COMB 18 1.2(DL+IL+WLZ)
 101. 9 1.2 10 1.2 7 1.2
 102. LOAD COMB 19 1.2(DL+IL-WLZ)
 103. 9 1.2 10 1.2 8 1.2
 104. LOAD COMB 20 1.5(DL+ELX)
 105. 9 1.5 10 1.5 1 1.5
 106. LOAD COMB 21 1.5(DL-ELX)
 107. 9 1.5 10 1.5 2 1.5
 108. LOAD COMB 22 1.5(DL+ELZ)
 109. 9 1.5 10 1.5 3 1.5
 110. LOAD COMB 23 1.5(DL-ELZ)
 111. 10 1.5 4 1.5
 112. LOAD COMB 24 1.5(DL+WLX)
 113. 10 1.5 5 1.5
 114. LOAD COMB 25 1.5(DL-WLX)
 115. 10 1.5 6 1.5
 116. LOAD COMB 26 1.5(DL+WLZ)
 117. 10 1.5 7 1.5
 118. LOAD COMB 27 1.5(DL-WLZ)
 119. 10 1.5 8 1.5
```

```
120. LOAD COMB 28 0.9 DL+ELX
121. 10 0.9 1 1.5
122. LOAD COMB 29 0.9 DL-ELX
123. 10 0.9 2 1.5
124. LOAD COMB 30 0.9 DL+ELZ
125. 10 0.9 3 1.5
126. LOAD COMB 31 0.9 DL-ELZ
127. 10 0.9 4 1.5
128. LOAD COMB 32 0.9 DL+WLX
129. 10 0.9 5 1.5
130. LOAD COMB 33 0.9 DL-WLX
131. 10 0.9 6 1.5
132. LOAD COMB 34 0.9 DL+WLZ
133. 10 0.9 7 1.5
134. LOAD COMB 35 0.9 DL-WLZ
135. 10 0.9 8 1.5
136. PERFORM ANALYSIS PRINT ALL


         P R O B L E M   S T A T I S T I C S
         -----------------------------------


  NUMBER OF JOINTS         32  NUMBER OF MEMBERS      49
  NUMBER OF PLATES          0  NUMBER OF SOLIDS        0
  NUMBER OF SURFACES        0  NUMBER OF SUPPORTS      4

        Using 64-bit analysis engine.

        SOLVER USED IS THE IN-CORE ADVANCED MATH SOLVER


TOTAL      PRIMARY LOAD CASES =     10, TOTAL DEGREES OF FREEDOM =     168
TOTAL LOAD COMBINATION  CASES =     25  SO FAR.
```

C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

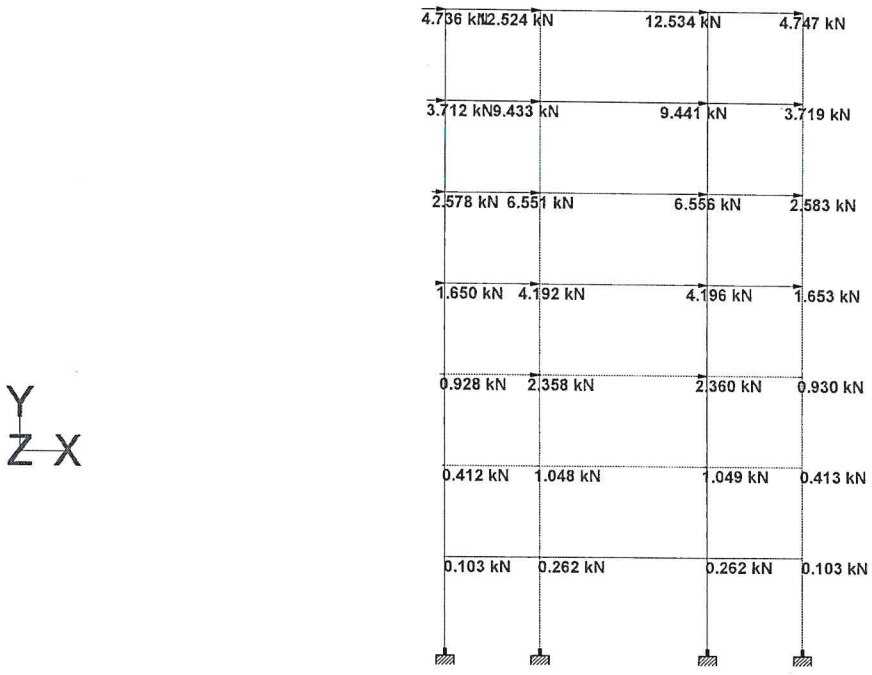

Load 1

C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

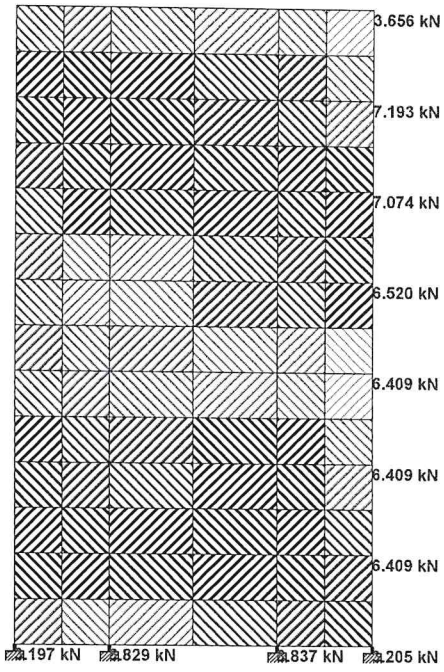
3.656 kN
7.193 kN
7.074 kN
6.520 kN
6.409 kN
6.409 kN
6.409 kN
.197 kN
.829 kN
.837 kN
.205 kN



Y
Z
X

Load 7


-10.000 kN/m
-10.000 kN/m
-10.000 kN/m
-10.000 kN/m
-10.000 kN/m
-10.000 kN/m
-10.000 kN/m
-10.000 kN/m
-10.000 kN/m
-10.000 kN/m
-10.000 kN/m
-10.000 kN/m
-10.000 kN/m
-10.000 kN/m

Y
Z X


Load 9

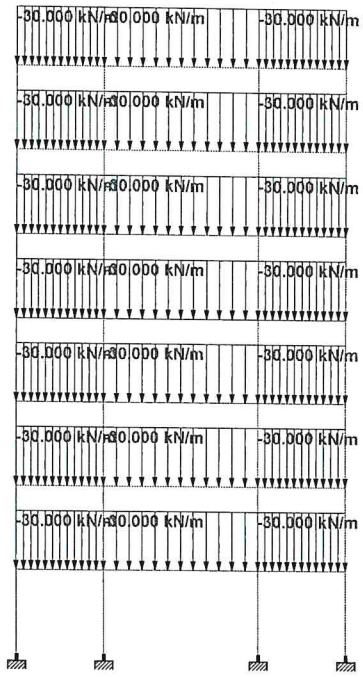


Y
Z X


Load 10

C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

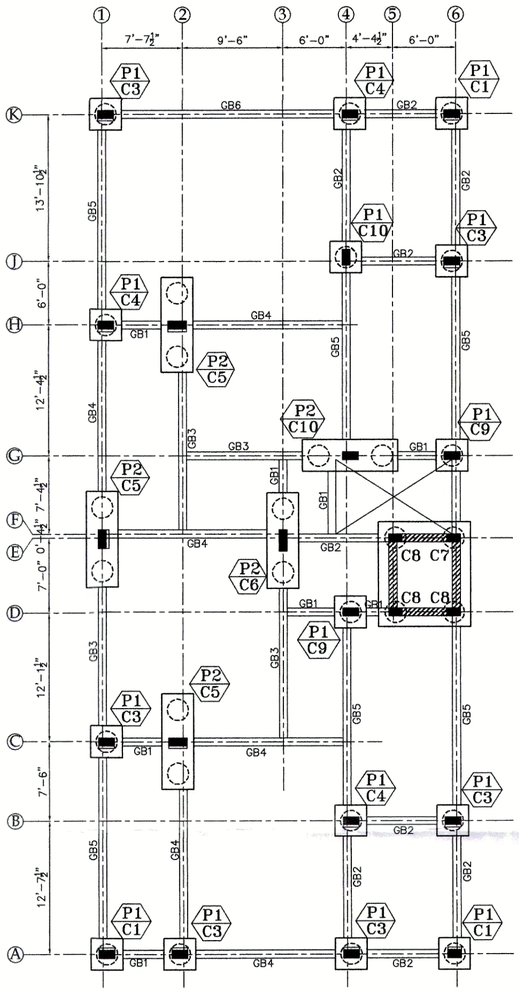





COL–C1




COL–C3




COL–C4




COL–C5




COL–C6




COL–C7




COL–C8




COL–C9




COL–C10




PILE–P1




600ø PILE
SAFE LOAD=100T




SECTION B B

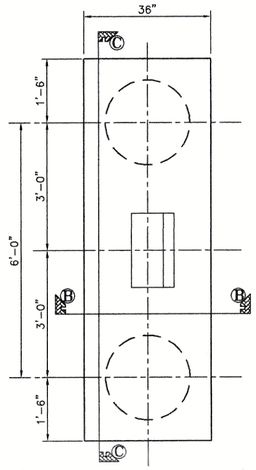


PILE–P2

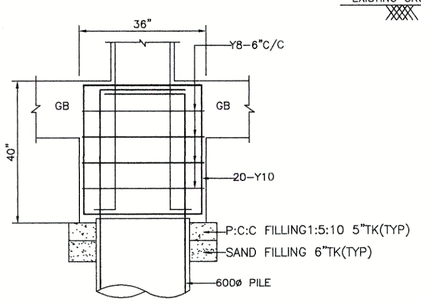


SECTION A A

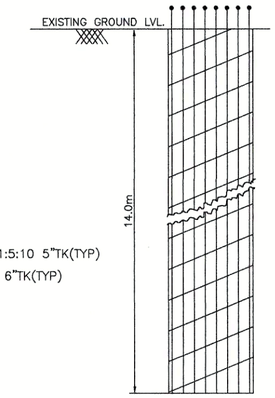


TYP. SEC. OF PILE
(BORED CAST-IN-SITU PILE)

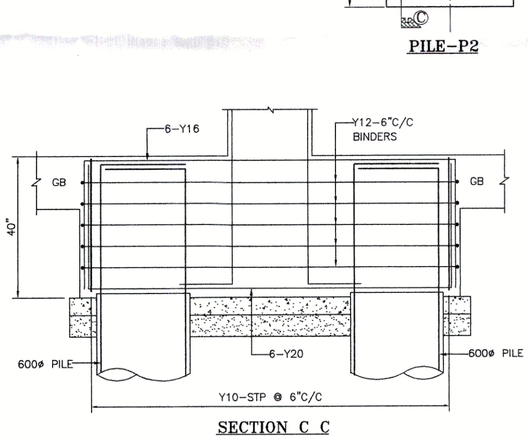


SECTION C C

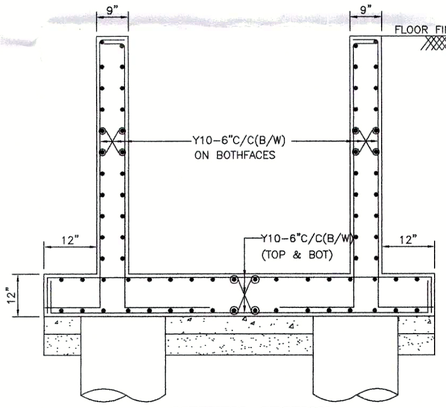


LIFTWELL SECTION

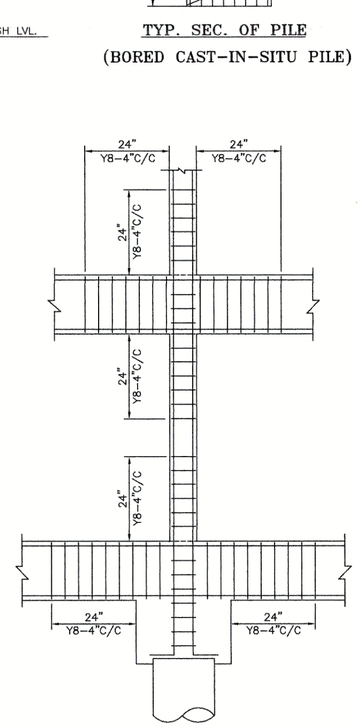


TYP. SEC. FOR
STP. DETAILS




C.S OF GB1




C.S OF GB2

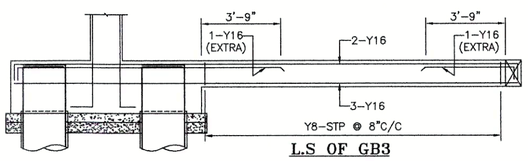


L.S OF GB3




C.S OF GB3

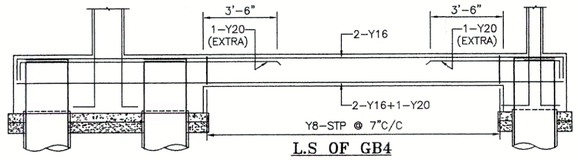


L.S OF GB4




C.S OF GB4

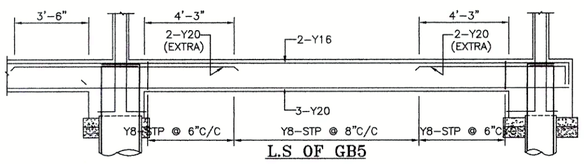


L.S OF GB5



C.S OF GB5

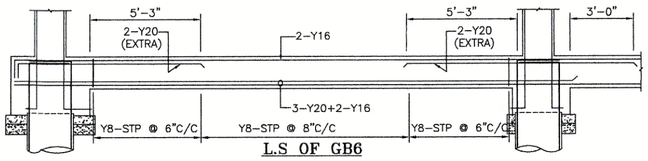

L.S OF GB6



C.S OF GB6

Notes:–

1. This drawing should be read along with architectural drawings.
2. Grade of R.C.C. items shall be M30 for column & M25 for all other R.C.C works
   Grade of pile elements shall be M30 with minimum cement content 400 kg/m3
3. Y Denotes TOR40 Steel confirming to I.S. 1786 – 1985.
   Grade – Fe 500
4. Clear cover to the main steel
   50 for Footings , Raft Slabs & Raft Beams.
   40 for Columns.
   25 for Lintel & Beams.
   20 for Sunshade & Slab.
5. Lap length shall be 50 d (Max. dia) for all bars.
6. ——— Bottom Reinforcement
7. ----- Top Reinforcement
8. Provide Continuous Chairs to keep the top Reinforcement in position
9. Provide Y 8 at 200 as Distribution steel for all top Reinforcement.
10. Spacer Bar to be Provided in Between Two Layers Of Reinforcement of Same Dia at Every 1000 C/ C.
11. Not more than 40% of Reinforcement shall be Lapped at any particular junction.
12. Cantilever props should not be released until the roof is concreted.
13. Foundation is designed for Stilt plus four upper floor only.
14. For Earthquake analysis Zone III is taken as per IS : 1893–2016 code.
15. Removal of formworks :
    i) For Slabs :
    a. Slabs spanning upto 4.5 m (15'–0") – 7 days
    b. Slabs spanning over 4.5 m (15'–0") – 14 days
    ii) For Beams and Arches :
    c. Beams and Arches spanning upto 6 m (20'–0") –14days
    d. Beams and Arches spanning over 6 m (20'–0") –21days

R.NO	DATE	DESCRIPTION

PROJECT

PROPOSED RESIDENTIAL BUILDING PLOT NO.3314, OLD DOOR NO.AJ 138, NEW DOOR NO.AJ 98, AJ BLOCK, 7TH MAIN ROAD, ANNA NAGAR CHENNAI 600 040 COMPRISED IN OLD S.NO.92/2PT, T.S.NO.146, BLOCK NO.1C OF NADUVAKKARAI VILLAGE& OLD S.NO.492, T.S.NO.4/10, BLOCK NO.1 OF THIRUMANGALAM VILLAGE WITHIN THE LIMITS OF GREATER CHENNAI CORPORATION

FOUNDATION DETAILS


DESIGNED	KANNAN		SCALE	1 : 100
DRAWN	NASURTHEEN		DATE	05-02-2026

STRUCTURAL CONSULTANTS:


C.KANNAN B.E.,M.E, (Structure)
Structural Engineer,
CMDA Reg. No. SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

C.KANNAN B.E., M.E(STRUCTURE)
DOOR NO:21, PLOT NO:257–W,
FLAT NO:2B, "UTOPIA APARTMENTS",
2nd FLOOR, 4th MAIN ROAD,
INDIRA NAGAR, CHENNAI–20.
MOBILE NO: 098412 49815.
E–MAIL:kannankds2007@gmail.com


FILE NAME : D/NASURTHEEN/JAN26/PUSHKAR–AJ BLOCK

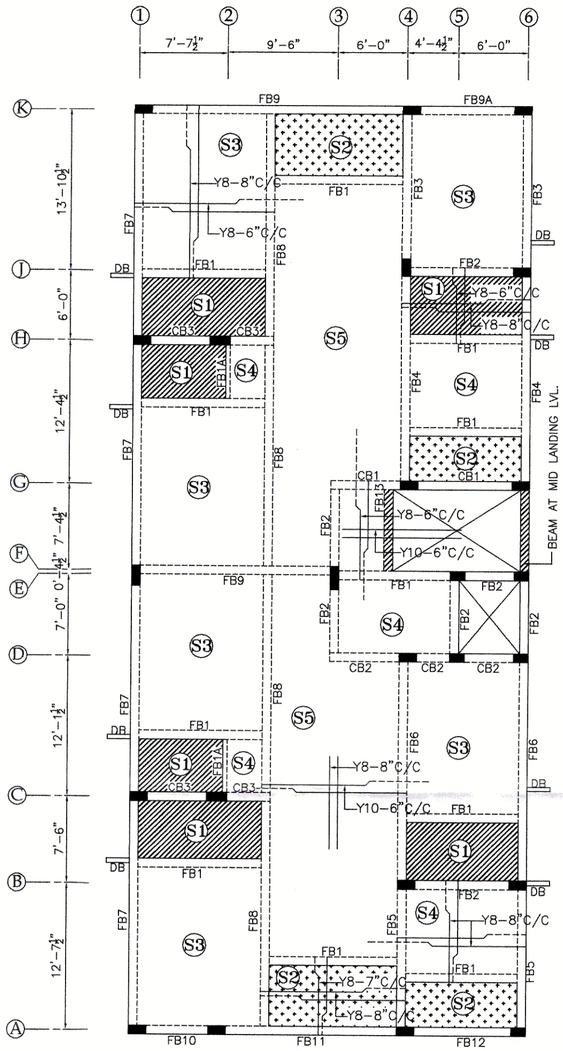


ALL SLABS ARE 5"THK UNLESS SPECIFIED




C.S OF FB1




C.S OF FB1A




C.S OF FB2

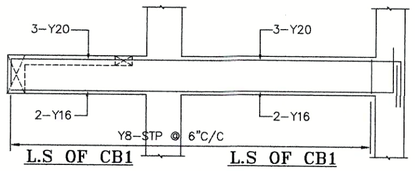


L.S OF CB1 L.S OF CB1




C.S OF CB1

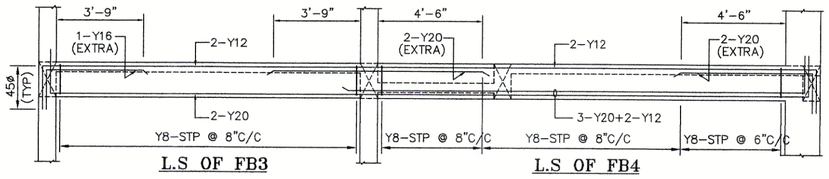


L.S OF FB3 L.S OF FB4




C.S OF FB3




C.S OF FB4

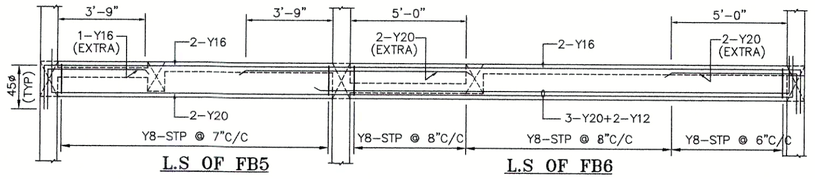


L.S OF FB5 L.S OF FB6




C.S OF FB5




C.S OF FB6

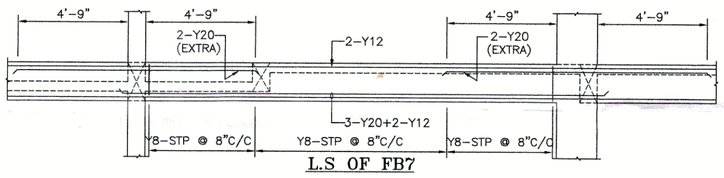


L.S OF FB7




C.S OF FB7







C.S OF DB

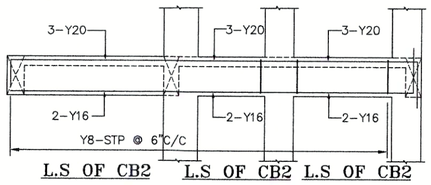


L.S OF CB2 L.S OF CB2 L.S OF CB2




C.S OF CB2




L.S OF CB3 L.S OF CB3




C.S OF CB3

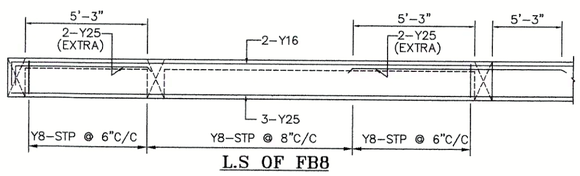


L.S OF FB8




C.S OF FB8

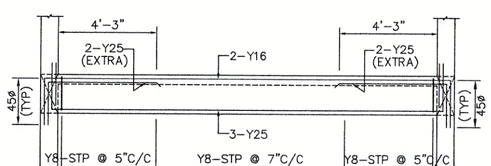


L.S OF FB9




C.S OF FB9




C.S OF FB9A




TYP. SEC. FOR STP. DETAILS

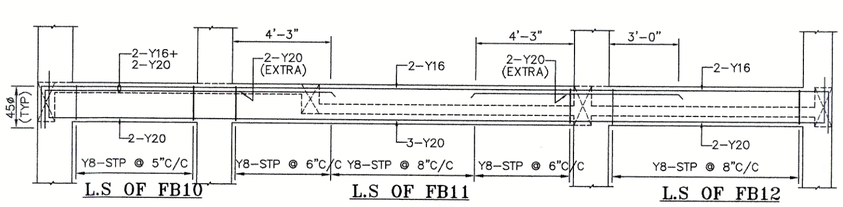


L.S OF FB10 L.S OF FB11 L.S OF FB12




C.S OF FB10



C.S OF FB11



C.S OF FB12



C.S OF FB13

Notes:-

1. This drawing should be read along with architectural drawings.
2. Grade of R.C.C. items shall be M30 for column & M25 for all other R.C.C works
3. Y Denotes TOR40 Steel confirming to I.S. 1786 – 1985. Grade – Fe 500
4. Clear cover to the main steel
   - 50 for Footings , Raft Slabs & Raft Beams.
   - 40 for Columns.
   - 25 for Lintel & Beams.
   - 20 for Sunshade & Slab.
5. Lap length shall be 50 d (Max. dia) for all bars.
6. ——— Bottom Reinforcement
7. ----- Top Reinforcement
8. Provide Continuous Chairs to keep the top Reinforcement in position
9. Provide Y 8 at 200 as Distribution steel for all top Reinforcement.
10. Spacer Bar to be Provided in Between Two Layers Of Reinforcement of Same Dia at Every 1000 C/ C.
11. Not more than 40% of Reinforcement shall be Lapped at any particular junction.
12. Cantilever props should not be released until the roof is concreted.
13. Foundation is designed for Stilt plus four upper floor only.
14. For Earthquake analysis Zone III is taken as per IS : 1893–2016 code.
15. Removal of formworks :
    - i) For Slabs :
    - a. Slabs spanning upto 4.5 m (15'–0") – 7 days
    - b. Slabs spanning over 4.5 m (15'–0") – 14 days
    - ii) For Beams and Arches :
    - c. Beams and Arches spanning upto 6 m (20'–0") –14days
    - d. Beams and Arches spanning over 6 m (20'–0") –21days

R.NO	DATE	DESCRIPTION

PROJECT

PROPOSED RESIDENTIAL BUILDING PLOT NO.3314, OLD DOOR NO.AJ 138, NEW DOOR NO.AJ 98, AJ BLOCK, 7TH MAIN ROAD, ANNA NAGAR CHENNAI 600 040 COMPRISED IN OLD S.NO.92/2PT, T.S.NO.146, BLOCK NO.1C OF NADUVAKKARAI VILLAGE& OLD S.NO.492, T.S.NO.4/10, BLOCK NO.1 OF THIRUMANGALAM VILLAGE WITHIN THE LIMITS OF GREATER CHENNAI CORPORATION

TYPICAL FLOOR ROOF DETAILS

DESIGNED	KANNAN		SCALE	1 : 100
DRAWN	NASURTHEEN		DATE	06-02-2026

STRUCTURAL CONSULTANTS:

C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai - 600 020.

C.KANNAN B.E., M.E(STRUCTURE)
DOOR NO:21, PLOT NO:257–W,
FLAT NO:2B, "UTOPIA APARTMENTS",
2nd FLOOR, 4th MAIN ROAD,
INDIRA NAGAR, CHENNAI–20.
MOBILE NO: 098412 49815.
E–MAIL:kannankds2007@gmail.com

FILE NAME : D/NASURTHEEN/JAN26/PUSHKAR–AJ BLOCK

THE LANDLENS SUITE

Eight ways to know a piece of land before you pay for it.

This report covers one part of the picture. These cover the rest, drawn from the same government records, for any property in Tamil Nadu.

LandLens One
Ask anything about a property and get an answer grounded in live government records, with the sources shown.
/landlens/one

Verify My Land
Every record check run on one property and returned as a single report.
/landlens/verify-my-land

Legal Opinion
An advocate's written opinion on the title, built on the records we pull for it.
/landlens

One Map
Every layer on one map: the parcel, its boundary, zoning, water bodies and what sits around it.
/landlens/one/map

PriceMap
What land actually changed hands for around this plot, taken from the registered deeds.
/landlens/pricemap

Build Scope
What you are allowed to build here: floor space, height, coverage and setbacks.
/landlens/build-scope

Property Tracker
Watch a property and hear about it when something new is registered against it.
/landlens/property-tracker

Deal Room
Run the transaction in one place: documents, stamping, signatures and the parties.
/landlens/deal-room

FREE TOOLS · NO ACCOUNT NEEDED

Twenty-four checks you can run yourself, at no cost.

Records and verification

The registers themselves, read for you.

- Encumbrance Certificate
- Patta and Chitta
- Field Measurement Sketch
- EC Analyzer
- Bank charge check
- Court case search
- Seller background check
- Approval check by survey

Value and duty

What it is worth and what it costs to register.

- Guideline value by street
- Guideline value by survey
- Stamp duty and registration fees
- Capital gains
- Floor space index
- Area unit converter

Zoning and land use

What the plan says can happen on this land.

- Land use zone finder
- CMDA land use check
- Coastal regulation zone
- Master plan check
- Water bodies finder
- Airport height clearance

Registers and directories

Who holds it, and which office keeps the record.

- Find your registering office
- Temple property check
- Waqf property check
- RERA register

Every free tool
/tools

Services we run for you
/services

The LandLens suite
/landlens/one

Verified RealEstate™

Every claim in this document traces back to a government record.

- Legal opinions, due diligence and title verification
- Building plan, layout and sub-division approvals
- Completion and occupancy certificates, regularisation
- Escrow, negotiation and NRI property management
- Land survey, soil testing, architecture and construction

Verified RealEstate
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India
hello@verified.realestate
+91 9996 12 9996

Prepared from the registers named on the page each finding sits on. Where a register could not be read, this document says so in its place rather than leaving the gap to be read as a clean result.