Verified RealEstate™

Your trusted partner for buying, selling, and managing property, ensuring hassle-free service with 100% transparency.

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996

Official Property Record

Digitally Verified Record - Powered by Verified RealEstate™



SOIL EXPLORATION REPORT

For

M/s. MUKURTHI HOUSING AND PROPERTIES PVT LTD.,

Ref: GEO - 211 - 2021-22

Date: 31.03.2022 – 02.04.2022

PROJECT NAME

SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF RESIDENTIAL APARTMENT BUILDING WITH STILT + 5 FLOORS OF PLINTH AREA 5,100 SQ. FT., @ SF. NO. : 370/3, CHINNAVEDAMPATTI, COIMBATORE NORTH, COIMBATORE DISTRICT – 641022.

GEODESIGN INDIA PRIVATE LIMITED®

(An ISO 9001 : 2015 Certified Company)

Soil Investigations, SPT Test, DTH, Diamond core drilling, & Grouting works

Old no – 40 , New no – 29 , 8th street , K.K.Pudur, Coimbatore - 38

Ph. 0422 4202452 Mobile : 90433 – 44488

E - mail: geodesign123@gmail.com , Web : www.geodesign.co.in

S.NO.	CONTENTS	PAGE NO.
1.	INTRODUCTION	3
	1.1 PURPOSE AND SCOPE	3
	1.2 THE SITE	3
2.	FIELD INVESTIGATIONS	3
	2.1 ROTARY BORING	3
	2.2 STANDARD PENETRATION TEST	4
	2.3 SAMPLING	4
3.	LABORATORY TEST	4
4.	FOUNDATION ANALYSIS	5
	4.1 SOIL PROFILE	5
	4.2 SAFE BEARING CAPACITY	5
5.	RECOMMENDATION	6
6.	REFERENCES	7
7.	ANNEXURE	
	7.1 LOG OF BORINGS	8 - 9
	7.2 LABORATORY TEST RESULTS	10 - 11
8.	PHOTOS	12
9.	ANNEXURE	
	9.1 BOREHOLE LOCATION DRAWING	13

GEODESIGN INDIA PRIVATE LIMITED

1. INTRODUCTION

1.1. PURPOSE AND SCOPE

Geotechnical site investigation work for "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF RESIDENTIAL APARTMENT BUILDING WITH STILT + 5 FLOORS OF PLINTH AREA 5,100 SQ. FT., @ SF. NO. : 370/3, CHINNAVEDAMPATTI, COIMBATORE NORTH, COIMBATORE DISTRICT – 641022. " The primary purpose of our investigation is to obtain data to develop foundation design recommendations for the above work. At, first instance, Two boreholes was bored at site. Client's representatives selected the locations of borings. To accomplish these purposes, the following tasks were performed:

1. Detailed soil borings were done up to stratum to explore the sub surface stratigraphy and obtain soil samples for testing. Field and laboratory tests were conducted to evaluate the index and engineering properties of the soils
2. Engineering analysis was performed to develop foundation design information for proposed structure.

1.2. THE SITE

"SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF RESIDENTIAL APARTMENT BUILDING WITH STILT + 5 FLOORS OF PLINTH AREA 5,100 SQ. FT., @ SF. NO. : 370/3, CHINNAVEDAMPATTI, COIMBATORE NORTH, COIMBATORE DISTRICT – 641022. "

2. FIELD INVESTIGATIONS

2.1. ROTARY BORING

Rotary drilling technique was adapted using Calyx machine in this field. In this method, boring is effected by the cutting action of a rotating bit that is kept in firm contact with the bottom of the hole. The bit is attached to the lower end of a hollow drill rod that is rotated by a suitable chuck. Drilling mud (usually Bentonite) is continuously forced down the hollow drill rods. The mud returning upwards though the annular space between the drill rods and the side of the hold bring the cutting to the surface.

2.2. STANDARD PENETRATION TEST

It is now most commonly used in site test. The test measures the penetration resistance of the split spoon sampler, when it is driven into the soil, at the bottom of a borehole in a standard manner. The N-value, which is the number of blow required to achieve 300mm penetration of the soil, indicates the relative density of sand or gravel, the consistency of other soil such as silts or clays and the strength of weak rocks. The test is described in IS 2131 - 1981. The split spoon sampler is attached to stiff drill rod and lowered to the bottom of the bore hold. A standard blow consists of dropping a mass of 63.5kg free fall through 750 mm on to an donut hammer at the top of the rods and ensuing that this amount of dynamic energy is transferred to the sampler as much as possible.

The number of blows required to achieve each 150mm penetration is recorded for a fall penetration of 450mm. The initial 150mm penetration is referred to as seating drive and the blows required for this penetration are not considered as this zone is in disturbed soil. The next 300mm of penetration is referred to as the test drive and the number of blows required to achieve this fully is termed the penetration resistance or N-value.

2.3. SAMPLING

Soil samples were collected through Split spoon and rock core sample were collected through single tube core barrel.

3. LABORATORY TESTS

The operations to be performed in the laboratory depend upon the type of the nature of data required for the problem at hand. In case of cohesionless material, like sand, the laboratory tests are usually minimum and the design parameters are worked out from field test data such as form SPT- N value, Core resistance and plate load test data.

In the case of cohesive soils, the programme of laboratory testing can vary from carrying out simple tests such as unconfined tests to comprehensive study of soil behaviour using triaxial shear tests and consolidation tests.

Following laboratory tests are conducted.

For Cohesion & cohesionless soil

a) Specific gravity

b) Sieve analysis

c) Atterberg's limits

d) Natural moisture content.

GEODESIGN INDIA PRIVATE LIMITED COIMBATORE-38

4. FOUNDATION ANALYSIS

4.1 Soil Profile

The profile of the area as observed in the bore hole is given in the chart. The water level is observed far below. The soil layer up to 12.00m depth KANKAR was obtained.

4.2 Safe Bearing Capacity

The bearing capacity of granular soil depends upon the unit weight and angle of internal friction of the soil. These two properties of granular soils are determined by standard penetration tests.

The allowable bearing pressure based on tolerable settlement has been established empirically by Terzaghi and Peck, 1948 and may be expressed by the equation.

Safe bearing capacity (SBC) = $3.5\ (N-3)\ \{(B+0.3)/2B\}^2 \times R_W \times F_D + P$

Where

N = Corrected N value N1

B = Width of Foundation = constant 1

RW = Water Correction = constant 0.5

FD = Depth of Factor = constant 1

P = Over Burden Pressure

5. RECOMMENDATION

For the site, "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF RESIDENTIAL APARTMENT BUILDING WITH STILT + 5 FLOORS OF PLINTH AREA 5,100 SQ. FT., @ SF. NO. : 370/3, CHINNAVEDAMPATTI, COIMBATORE NORTH, COIMBATORE DISTRICT – 641022," the borehole investigation was conducted and SBC was determined.

- In this site, up to 12.00m, KANKAR is obtained.
- The **ISOLATED FOUNDATION** is recommended for this site.
- **Rest the Foundation at 3.00m from the Natural Ground Level.**
- The **SBC at 3.00m is 36.85 Ton/m^2** is determined in All Locations @ Foundation Level.

Er.K.P.VETRISELVAN.,M.E(GEOTECH),MIGS,MISTE.,
GEOTECHNICAL ENGINEER

S.NO	TITLE	ENGINEER'S NAME	SIGNATURE
1	Lab testing	Er.V.Suganthi	V. Suganthi.
2	Report prepared by	Er.V.Suganthi	V. Suganthi
3	Corrected by	Er.A.Sindhuja	A. Sindhuja.
4	Checked by	Er.D.Ranjini	D. Ranjini.
5	Approved by	Er.K.P.Vetriselvan	

Copy right :
This report is the property of GEODESIGN INDIA PRIVATE LIMITED and should not be copied or reproduced without the consent of engineer.

6. REFERENCES

1. **IS: 1892-1979** – Indian Standard Code of Practice for Determination of Bearing Capacity Of Shallow Foundation

2. **IS: 1892-1979** - Indian Standard Code of Practice for Subsurface Investigation for Foundations

3. **IS: 2131-1981** - Indian Standard Method for Standard Penetration Test for Soils

4. **IS: 8009 (Part 1) - 1976** - Indian Standard Code of Practice for Calculation of Settlements of Foundations

5. **IS: 2720 (Part-2) - 1973** - Indian Standard Methods of Test for Soils, Determination of Water Content

6. **IS: 2720 (Part-4) - 1985** - Indian Standard Methods of Test for Soils, Grain Size Analysis

7. **IS: 2720 (Part-5) – 1985** - Indian Standard Method of Test for Soils, Determination of Liquid and Plastic Limit

8. **IS: 2720 (Part-3/Sec-1)1980** - Indian Standard Methods of Test for Soils, Determination of Specific Gravity.

GEO DESIGN INDIA PRIVATE LIMITED COIMBATORE-38

1

Bore Log

Ref: *GEO - 211 - 2021-22*

Name of Project: "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF RESIDENTIAL APARTMENT BUILDING WITH STILT + 5 FLOORS OF PLINTH AREA 5,100 SQ. FT., @ SF. NO. : 370/3, CHINNAVEDAMPATTI, COIMBATORE NORTH, COIMBATORE DISTRICT – 641022. "

Soil Investigation done by: GEODESIGN INDIA PRIVATE LIMITED Soil Exploration Consultant, Coimbatore-38

Type of Drilling: Rotary – Mud Circulation
LOCATION – 1

G.W.T-Not met

Bore hole No. : 1

Date of commencement : 31.03.2022
Date of completion : 01.04.2022

Depth below G.L	Soil Profile	Description of Soil	Thickness of layer (m)	Standard penetration test data: Depth at which test is conducted	N – Value- Depth of penetration: 15cm	30cm	45cm	For 30cm	Relative density / Consistency	Graphical representation of penetration resistance (0 20 40 60 80 100)
0.80		**Clay**	**0.80**							
				1.00	9	11	12	23	Medium	
2.40		**Clay with Kankar**	**1.60**	2.00	13	14	16	30	V.Dense	
				3.00	12	50/4	-	>50	V.Dense	
				4.50	50/3	-	-	>50	V.Dense	
				6.00	50/2	-	-	>50	V.Dense	
		Kankar	**9.60**							
12.00m		End of Bore hole								

Contd…2

2

Bore Log

Ref: *GEO - 211 - 2021-22*

Name of Project: "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF RESIDENTIAL APARTMENT BUILDING WITH STILT + 5 FLOORS OF PLINTH AREA 5,100 SQ. FT., @ SF. NO. : 370/3, CHINNAVEDAMPATTI, COIMBATORE NORTH, COIMBATORE DISTRICT – 641022. "

Soil Investigation done by: GEODESIGN INDIA PRIVATE LIMITED Soil Exploration Consultant, Coimbatore-38

Type of Drilling: Rotary – Mud Circulation
LOCATION – 2

G.W.T-Not met

Bore hole No. : 2

Date of commencement : 01.04.2022
Date of completion : 02.04.2022

Depth below G.L	Soil Profile	Description of Soil	Thickness of layer (m)	Standard penetration test data: Depth at which test is conducted	N – Value- Depth of penetration: 15cm	30cm	45cm	For 30cm	Relative density / Consistency	Graphical representation of penetration resistance
0.90		**Clay**	**0.90**							
2.50		**Clay with Kankar**	**1.60**	1.00	10	14	18	32	Dense	
				2.00	12	15	23	38	Dense	
		Kankar	**9.50**	3.00	26	50/11	-	>50	V.Dense	
				4.50	50/3	-	-	>50	V.Dense	
				6.00	50/4	-	-	>50	V.Dense	
				7.50	50/3	-	-	>50	V.Dense	
				9.00	50/2	-	-	>50	V.Dense	
				10.50	50/1	-	-	>50	V.Dense	
12.00m		End of Bore hole		12.00	>50	-	-	>50	V.Dense	

Graphical representation of penetration resistance: 0 20 40 60 80 100

D. Ram

Geotechnical Engineer

GEODESIGN INDIA PRIVATE LIMITED COIMBATORE-38

Er.D. RAMESH M.E (GEOTECH)
GEOTECHNICAL ENGINEER
GEODESIGN INDIA PRIVATE LIMITED

Ref: *GEO – 211 - 2021-22*

SOIL TEST RESULTS

Name of Project: "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF RESIDENTIAL APARTMENT BUILDING WITH STILT + 5 FLOORS OF PLINTH AREA 5,100 SQ. FT., @ SF. NO. : 370/3, CHINNAVEDAMPATTI, COIMBATORE NORTH, COIMBATORE DISTRICT – 641022. "

GEODESIGN INDIA PRIVATE LIMITED Soil Exploration Consultant, Coimbatore-38	BORE NUMBER - 1	LOCATION : 1	GROUND WATER LEVEL: Not met	COMMENCEMENT OF LAB TESTING 04.04.2022	COMPLETION OF LAB TESTING 06.04.2022

SOIL PROFILE AND DEPTH IN METRES	DEPTH OF SAMPLING (m)	IS SOIL CLASSIFICATION	NATURAL WET DENSITY (kN/m³)	NATURAL MOISTURE CONTENT %	INDEX TEST			SIEVE ANALYSIS % PASSING IS SIEVE ANALYSIS				SPECIFIC GRAVITY	SHEAR TEST		STANDARD PENETRATION TEST				CONSOLIDATION TEST			
					LIQUID LIMIT (%)	PLASTIC LIMIT (%)	PLASTICITY INDEX (%)	% of GRAVEL	% of SAND	% of SILT	% of CLAY		COHESION C (Ton / m²)	ANGLE OF INTERNAL FRICTION ⁰	DEPTH OF TESTING (m)	OBSERVED N VALUE	CORRECTED N VALUE	SAFE BEARING CAPACITY (T/m²)	COMPRESSION INDEX C_c	PRE - CONSOLIDATION PRESSURE (kg/cm²)	INITIAL VOIDS RATIO	CO-EFFECT OF CONSOLIDATION Cv (cm²/sec)
		CL	15.78	11.26	31	20	11	7	18	30	45	2.69	2.9	-	1.00	23	23	15.48	-	-	-	-
	0.80														2.00	30	30	21.36				
		CL & KAN	17.39	14.95	-	-	-	34	15	13	38	2.72	2.5	28	3.00	>50	50	36.85	-	-	-	-
	2.40														4.50	>50	50	37.90				
															6.00	>50	50	38.95				
		KAN	17.45	10.26	-	-	-	-	-	-	-	-	-	-					-	-	-	-
	12.00																					

Depth (m)	Core Recovery (%)	Rock Quality Designation (%)	Allowable Bearing Pressure (Ton/m²)
6.00 – 7.50	5 Small pieces	NIL	-
7.50 - 9.00	2.66 + 2 Small pieces	NIL	-
9.00 – 10.50	6.66	NIL	-
10.50 – 12.00	10	NIL	-

CL - CLAY OF LOW PLASTICITY, CL & KAN - CLAY WITH KANKAR, KAN-KANKAR.

Contd…2

Ref: *GEO – 211 - 2021-22*

SOIL TEST RESULTS

Name of Project: "SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF RESIDENTIAL APARTMENT BUILDING WITH STILT + 5 FLOORS OF PLINTH AREA 5,100 SQ. FT., @ SF. NO. : 370/3, CHINNAVEDAMPATTI, COIMBATORE NORTH, COIMBATORE DISTRICT – 641022. "

GEODESIGN INDIA PRIVATE LIMITED Soil Exploration Consultant, Coimbatore-38					BORE NUMBER - 2			LOCATION : 2				GROUND WATER LEVEL: Not met		COMMENCEMENT OF LAB TESTING 04.04.2022				COMPLETION OF LAB TESTING 06.04.2022			
SOIL PROFILE AND DEPTH IN METRES	DEPTH OF SAMPLING (m)	IS SOIL CLASSIFICATION	NATURAL WET DENSITY (kN/m³)	NATURAL MOISTURE CONTENT %	INDEX TEST			SIEVE ANALYSIS % PASSING IS SIEVE ANALYSIS				SPECIFIC GRAVITY	SHEAR TEST		STANDARD PENETRATION TEST				CONSOLIDATION TEST			
					LIQUID LIMIT (%)	PLASTIC LIMIT (%)	PLASTICITY INDEX (%)	% of GRAVEL	% of SAND	% of SILT	% of CLAY		COHESION C (Ton / m²)	ANGLE OF INTERNAL FRICTION °	DEPTH OF TESTING (m)	OBSERVED N VALUE	CORRECTED N VALUE	SAFE BEARING CAPACITY (T/m²)	COMPRESSION INDEX C_c	PRE - CONSOLIDATION PRESSURE (kg/cm²)	INITIAL VOIDS RATIO	CO-EFFECT OF CONSOLIDATION C_v (cm²/sec)
	0.90	CL	16.95	14.47	34	21	13	10	21	26	43	2.73	2.6	-	1.00	32	32	22.14	-	-	-	-
		CL & KAN	19.64	16.31	32	23	9	29	24	12	35	2.70	2.2	30	2.00	38	38	27.27				
	2.50														3.00	>50	50	36.85	-	-	-	-
															4.50	>50	50	37.90				
															6.00	>50	50	38.95				
		KAN	15.23	13.08	-	-	-	-	-	-	-	-	-	-	7.50	>50	50	40.00	-	-	-	-
															9.00	>50	50	41.05				
															10.50	>50	50	42.10				
															12.00	>50	50	43.15				
	12.00																					

CL - CLAY OF LOW PLASTICITY, CL & KAN - CLAY WITH KANKAR, KAN-KANKAR.

D. Ranjini
Geotechnical Engineer

GEODESIGN INDIA PRIVATE LIMITED COIMBATORE-38

Er. D. RANJINI M.E (GEOTECH)
GEOTECHNICAL ENGINEER
GEODESIGN INDIA PRIVATE LIMITED

8. PHOTOS

Borehole Location – 1



Borehole Location – 2




D. Ranjini

Er.D.RANJINI, M.E(GEOTECH),
GEOTECHNICAL ENGINEER

GEODESIGN INDIA PRIVATE LIMITED COIMBATORE-38

Er. D. RANJINI M.E (GEOTECH)
GEOTECHNICAL ENGINEER
GEODESIGN INDIA PRIVATE LIMITED

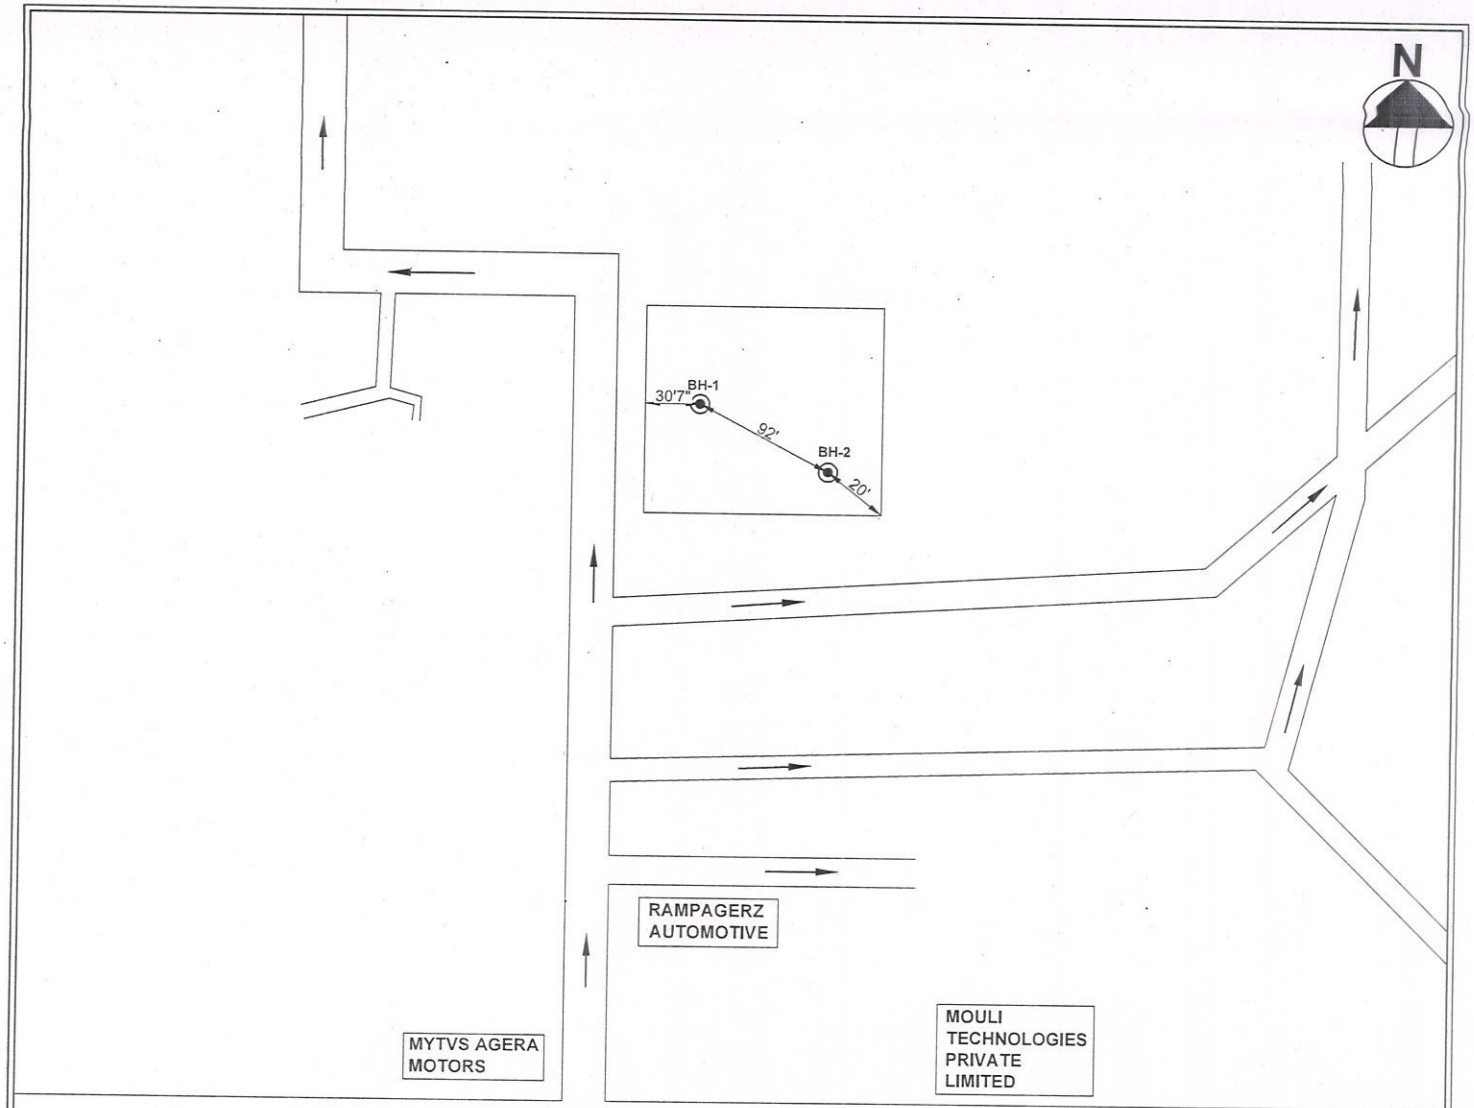

CLIENT : **M/s. MUKURTHI HOUSING AND PROPERTIES PVT LTD.,**

PROJECT : SOIL INVESTIGATION FOR THE PROPOSED CONSTRUCTION OF RESIDENTIAL APARTMENT BUILDING WITH STILT + 5 FLOORS OF PLINTH AREA 5,100 SQ. FT., @ SF. NO. : 370/3, CHINNAVEDAMPATTI, COIMBATORE NORTH, COIMBATORE DISTRICT - 641022.

Copyright:
This drawing is the property of GEODESIGN INDIA PRIVATE LIMITED and should not be copied or reproduced without the consent of engineer.

PREPARED: A Sindhuja

ENGINEER: D Ramesh

DATE: 31.03.2022-02.04.2022

GEODESIGN INDIA PRIVATE LIMITED
SOIL EXPLORATION & FOUNDATION DESIGN
(A UNIT OF GEOTECHNICAL ENGINEERS)
H.O:Old No:40,New No:29, 8th St. K.K.Pudur,Coimbatore-641038.
E -Mail:geodesign123@gmail.com Web:www.geodesign.co.in
Off : 0422-4202452

Er.K.P. VETRISELVAN, M.E(GEOTECH), MICS,MISTE,
GEOTECHNICAL ENGINEER
INDIAN GEOTECHNICAL SOCIETY (LM-3584)



our services doesn't just end there

Buying & Selling Services

Property Buying Assistance, Property Selling Support, Market Price Analysis, Owner Outreach and Negotiation.

Legal & Documentation Services

Certified EC, Patta, legal opinions, property verification, due diligence, litigation solutions, and legal heir certificates.

Property Development & Approvals

Building plan approvals, construction, layout and sub-division approvals, zone conversion, and occupancy certification.

NRI & Investment Services

Escrow Services, Rentals, Litigation Solutions, Property Valuation and Property Management

Compliance & Special Services

Demolition, Vaasthu checks, regularization of unauthorized buildings, and office space solutions.



empowering your real estate decisions with smart tools

Property Valuation & Cost Estimation

Guideline Value, Apartment Composite Value, Stamp Duty & Registration Fees Calculator, Building Value Calculator, Capital Gains Calculator, Area Unit Converter, Length Unit Converter

Ownership, Compliance & Legal Verification

Encumbrance Certificate (EC) Search, Find Your SRO, Temple Property Check, WAQF Property Check, View Patta/Chitta, View FMB, Patta Analyzer, EC Analyzer

Zoning & Land Use Analysis

Land Use Zone Finder, CRZ Zone Check, Aquifer Zone Check, CBA Check, EWS Check, Road Width Check, Proposed Road Widening Check, FSI Calculator

Property Documentation & Workflow Tools

Forms & Templates, Document Generator, Document Translation, Dictionary

Vastu & Property Management Tools

Home Vastu Shastra, Plot Vastu Shastra, Property Management

Verified RealEstate™

We're honored to be part of your real estate journey

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996
www.verified.realestate