Verified RealEstate™

Your trusted partner for buying, selling, and managing property, ensuring hassle-free service with 100% transparency.

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996

Official Property Record

Digitally Verified Record - Powered by Verified RealEstate™



GLOBE GEOTECHNIQUES

GEOTECHNICAL INVESTIGATION REPORT

PROJECT: Geotechnical investigation for the proposed construction of G+13 Floors RCC Framed Structure at New Kumaran Nagar Main Road, Comprised in S.No.270/1, Sholinganallur Village, Chennai.

CLIENT: Mr.Chiranjeev

Soil Investigation carried out and Report prepared by:

GLOBE GEOTECHNIQUES

CMDA REG.NO.GTE/19/03/012

DTCP REG. NO. RGTE/TKDTCP/09/01/2024

REPORT NO: GGS_JAN20_132_SHOLINGANALLUR

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail.com

GLOBE GEOTECHNIQUES

06/12/2020

New No.17/10, Vinayagapuram III Street, MMDA, Arumpakkam, Chennai-600 106.
Mobile: 9445315710 / 9994712791. E-mail: globegeotechniques@gmail.com

CONTENTS

S.NO.	DESCRIPTION	PAGE NO.
1.	INTRODUCTION	1
2.	OBJECTIVE	2
3.	SCOPE OF WORK	2 - 3
4.	INVESTIGATION PROGRAM & TECHNIQUES	3 - 4
5.	LABORATARY TESTING PROGRAM	4 - 5
6.	DETAILS OF SUBSURFACE SOIL	5 - 6
7.	GROUND WATER	6
8.	SAFE BEARING CAPACITY	6 - 7
9.	FOUNDATION RECOMMENDATIONS	7 – 11
	Appendix – A **BOREHOLE LOG**	A
	Appendix – B - **LABORATARY TEST RESULTS** -	B
	Appendix – C - **GENERAL COMMENTS**	C

GLOBE GEOTECHNIQUES


CHENNAI METROPOLITAN DEVELOPMENT AUTHORITY
'ThalamuthuNatarajan Building', No.1, Gandhi Irwin Road,
Egmore, Chennai-600 008.

PROFESSIONAL REGISTRATION CERTIFICATE

This is to certify that the **Dr. G. MANOJKUMAR** has enrolled as **Registered Geo-Technical Engineer (RGTE)** with Chennai Metropolitan Development Authority (CMDA) who has the qualification of **M.E., (Soil Mechanics & Foundation Engg.)** and experience in the relevant field for **11years**.

He has been given the Registration No.**GTE/2019/03/012** Renewed on **21.03.2024.** He shall be required to comply with the duties and responsibilities prescribed by the Government of Tamil Nadu in Part-V, "Registration of Professionals", Tamil Nadu Combined Development and Building Rules, 2019 approved vide G.O.(Ms) No.18 MAWS (MA1) Dept. dated 04.02.2019.

This Registration is valid upto **20.03.2029**.

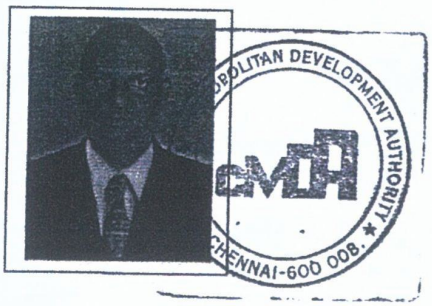

21/3/24

(A. MEGANATHAN)
Superintendent

GGS_JAN20_132_
SHOLINGANALLUR
DATE: 06.12.2020

GLOBE GEOTECHNIQUES

24/10/24

Er.G.MANOJKUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail com

INTRODUCTION

This report presents the results of the geotechnical investigations carried out by **GLOBE GEOTECHNIQUES,** for the proposed construction of G+13 Floors Structure at New Kumaran Nagar Extension, Sholinganallur, Chennai.

This work was authorized by **Mr.Chiranjeev.** This report contains the field and laboratory test results along with Design computations and recommendations for suitable foundation systems.

Six (06) Standard Penetration Testing bores were drilled at the proposed site up to maximum depth of 12.50 m, 10.50 m, 10.50 m, 10.70 m, 10.50 m and 10.50 m at Borehole locations BH-01, BH-02, BH-03, BH-04, BH-05 and BH-06 respectively below existing ground level as per the request of the client.

The investigation consists of drilling Six (06) boreholes, soil sampling, field and laboratory testing and preparation of a Geotechnical Report for the proposed construction of G+13 Floors Structure at New Kumaran Nagar Extension, Sholinganallur, Chennai.

GLOBE GEOTECHNIQUES

OBJECTIVE

The objective of soil investigation is to ascertain the nature and characteristics of sub-soil below the ground level at the site and to establish relevant properties for determination of safe bearing capacity of soil.

SCOPE OF WORK

The scope of this investigation is to: Mobilization of equipment to the site and demobilization of the same on completion of field work. Determine the soil profile at the site by conducting Standard Penetration tests at various depths, with ground water observation.

i) Collection of disturbed samples and undisturbed samples wherever possible.
ii) Laboratory tests for determination of Index and Engineering Properties of soil.

Recommend a suitable foundation system and safe bearing pressure at the founding levels for the proposed construction of G+13 Floors Structure at New Kumaran Nagar Extension, Sholinganallur, Chennai.

To achieve the above, Six (06) bores were drilled at the proposed site up to maximum depth of 12.50 m, 10.50 m, 10.50 m, 10.70 m, 10.50 m and 10.50 m at Borehole locations BH-01, BH-02, BH-03, BH-04, BH-05 and BH-06 respectively. The borehole location was selected by our geotechnical engineer in-

Er.G.MANOJ KUMAR B.E(Civil) M.E(Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail.com

charge. Soil samples were collected for visual identification, classification and laboratory testing.

The Borehole log is given in Appendix ~A~ and the laboratory test results is presented in Appendix ~B~.

INVESTIGATION PROGRAM & TECHNIQUES

After the visual inspection of the site, the subsurface investigation was started on 29th January 2020 and completed on the day of 31st January 2020.

Six (06) bores were drilled at the proposed site up to maximum depth of 12.50 m, 10.50 m, 10.50 m, 10.70 m, 10.50 m and 10.50 m at Borehole locations BH-01, BH-02, BH-03, BH-04, BH-05 and BH-06 respectively selected by the geotechnical engineer in-charge. Rotary drilling was performed using water as drilling fluid in the sub soil with casing pipe to stabilize the boreholes up to the required depth. Field testing and sampling were conducted in accordance with IS: 2131-1981.

Standard penetration tests were conducted at the borehole locations, in accordance with IS: 2131. The tests were conducted at every change of strata up to the depth of termination of the borehole as directed by the engineer-in-charge. In this test, a standard split spoon of length about 460 mm and external/internal diameter of 51/35 mm initially penetrates the soil for 15cm to bypass the expected accumulated sludge at the bottom of the hole by means of a **63.5 kg (140 lb)**hammer falling freely along a guide from a height of 760 mm.

GLOBE GEOTECHNIQUES

The total number of blows (N) required, to advance the spoon into the bore, for another two successive 15cm (a total of 30 cm) is recorded as a measure of the soil relative density or consistency as given in Table # 1.0.The fieldwork was carried out under the close supervision of our engineer in accordance with Indian Standard mentioned earlier.

LABORATORY TESTING PROGRAM

All the extracted soil samples were brought to the Geotechnical & Materials Testing Laboratory of GLOBE GEOTECHNIQUES, for further examination in accordance with IS: 1498-1970. These samples were used for visual and physical identification and for conducting laboratory classification tests as per I.S.1498-1970.

1. Moisture Content
2. Liquid limit (IS: 2720 Part V – 1985)
3. Plastic Limit and Plasticity Index (IS: 2720 Part VI – 1972)
4. Sieve Analysis (IS: 2720 Part IV – 1985)

The laboratory test results are given in Appendix "B".

Coarse Grained Samples:

Grain size Analysis Tests:

On the coarse grained samples, grain size distribution tests were conducted as per I.S.2720 (Part 4)-1985, to know the gradation characteristics and to classify them. These results are presented in Tables.

Fine Grained Samples:

Index Property – Free Swell Tests:

Atterberg's Limits were carried out on fine grained soil samples to evaluate the limits of different consistency states. Generally

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445215710

Liquid limits, Plastic limits and Shrinkage Limits tests were conducted as per I.S.2720 (Part-5)-1985 and I.S.2720 (Part 6)-1972. On such type of strata encountered at the investigation locations, such tests were conducted and the test results are presented in tables.

SUBSURFACE SOIL DESCRIPTION

Based on the bore-hole information, the existing sub surface soil profile at the captioned site is illustrated below.

Borehole I	
Layers	**Description of Soil**
00.00 m-03.00 m	Light Greyish Sandy Clay
03.00 m-06.00 m	Dark Greyish Clayey Silty Fine Sand
06.00 m-09.00 m	Light Greyish Clayey Medium to Fine Sand
09.00 m-12.50 m	Soft Weathered / Disintegrated Rock
Below 12.50 m	Hard Rock
Drilling stopped at 12.50 m below EGL	

Borehole II	
Layers	**Description of Soil**
00.00 m-03.00 m	Light Greyish Sandy Clay
03.00 m-06.00 m	Dark Greyish Clayey Silty Fine Sand
06.00 m-09.00 m	Light Greyish Clayey Medium to Fine Sand
09.00 m-10.50 m	Soft Weathered / Disintegrated Rock
Drilling stopped at 10.50 m below EGL	

Borehole III	
Layers	**Description of Soil**
00.00 m-03.00 m	Light Greyish Sandy Clay
03.00 m-06.00 m	Dark Greyish Clayey Silty Fine Sand
06.00 m-09.00 m	Dark Greyish Medium to Fine Sand with Shells
09.00 m-12.50 m	Soft Weathered / Disintegrated Rock
Drilling stopped at 10.50 m below EGL	

GLOBE GEOTECHNOLOGIES

Borehole IV	
Layers	**Description of Soil**
00.00 m-03.00 m	Light Greyish Sandy Clay
03.00 m-06.00 m	Dark Greyish Clayey Silty Fine Sand
06.00 m-09.00 m	Light Greyish Clayey Medium to Fine Sand
09.00 m-10.70 m	Soft Weathered / Disintegrated Rock
Drilling stopped at 10.70 m below EGL	

Borehole V	
Layers	**Description of Soil**
00.00 m-03.00 m	Light Greyish Sandy Clay
03.00 m-06.00 m	Dark Greyish Clayey Silty Fine Sand
06.00 m-09.00 m	Light Greyish Clayey Medium to Fine Sand
09.00 m-10.50 m	Soft Weathered / Disintegrated Rock
Drilling stopped at 10.50 m below EGL	

Borehole VI	
Layers	**Description of Soil**
00.00 m-03.00 m	Light Greyish Sandy Clay
03.00 m-06.00 m	Dark Greyish Clayey Silty Fine Sand
06.00 m-09.00 m	Light Greyish Clayey Medium to Fine Sand
09.00 m-10.50 m	Soft Weathered / Disintegrated Rock
Drilling stopped at 10.50 m below EGL	

GROUND WATER

GROUND WATER TABLE	
Borehole Location	**Depth of Ground Water Table**
Borehole I	1.00 m below existing ground level
Borehole II	0.70 m below existing ground level
Borehole III	0.70 m below existing ground level
Borehole IV	1.00 m below existing ground level
Borehole V	1.10 m below existing ground level
Borehole VI	1.10 m below existing ground level

SAFE BEARING CAPACITY:

IS CODE (IS: 6403-1981) recommends a bearing capacity equation to take into account, the shape of the footing,

Er.G.MANOJ KUMAR B.E(Civil) M.E(Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail.com

inclination of loading, depth of embedment and effect of water table.

For General shear failure:

$q_{nf} = cN_c.s_c.d_c.i_c + \sigma (N_q-1)s_q.d_q.i_q + 0.5\ B.Y.N_Y.s_Y.d_Y.i_YW'$

For Local shear failure:

$q_{nf} = 2/3\ cN_c'.s_c.d_c.i_c + \sigma (N_q'-1)s_q.d_q.i_q + 0.5\ B.Y.N_Y'.s_Y.d_Y.i_YW'$

SHAPE FACTORS (IS: 6403-1981)

Shape of base	Shape factors		
	s_c	s_q	s_Y
1.Continuous strip	1.0	1.0	1.0
2.Rectangle	(1+0.2B/L)	(1+0.2B/L)	(1-0.4B/L)
3.Square	1.3	1.2	0.8
4. Circle	1.3	1.2	0.6

PILE LOAD CAPACITY:

STATIC FORMULA:

PILE LOAD CAPACITY = POINT BEARING RESISTANCE + END BEARING RESISTANCE.

FOUNDATION RECOMMENDATION:

The foundation system design is an interface between super structure and the sub soil bearing strata characteristics. A sound foundation system should be safe against bearing strata shear response under the super structure load intensity. Similarly, the stability of the foundation system is governed by the bearing strata deformation response under the super structure load intensity.

In addition, as a combined system of super structure and foundation, the overall stability is also governed by the super structure arrangement. Considering the above aspects of foundation design, the suitable type of foundation system with respect to the sub soil conditions encountered at the borehole locations is presented in the subsequent sections.

Based on the borehole information in addition to the nature of the proposed construction of G+13 Floors Structure at New Kumaran Nagar Extension, Sholinganallur, Chennai, the following foundation recommendation shall be adopted.

PILE FOUNDATION:


Bored cast in–situ pile (End bearing cum friction) shall be adopted by terminating pile length at 12.50 m from existing ground level.


S.NO.	PILE DIAMETER, mm	PILE LENGTH, m	RECOMMENDED SAFE LOAD CARRYING CAPACITY OF PILE (SKIN+END), kN	LATERAL LOAD CARRYING CAPACITY OF PILE, kN
1	300 mm dia	12.50	**250.00**	33
2	400 mm dia	12.50	**380.00**	44
3	450 mm dia	12.50	**480.00**	58
4	500 mm dia	12.50	**560.00**	67
5	600 mm dia	12.50	**750.00**	85
6	800 mm dia	12.50	**1200.00**	129
7	1000 mm dia	12.50	**1800.00**	197

- *Actual pile capacities will* range between 25 to 55 tonnes, which shall be verified by pile load tests.

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail com

- Since, the behavior of the pile not only depends upon the soil parameters (theoretical load carrying capacity estimates) but also on the execution skill and care, it is mandatory to construct prototype pile load tests as per the guide lines laid down in IS: 2911-Part IV to confirm the theoretical estimates, before proceeding with the execution work.

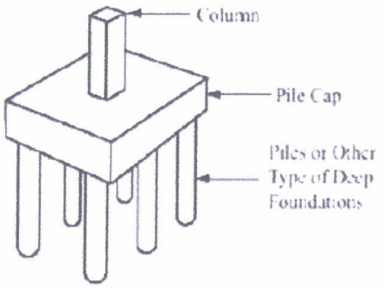

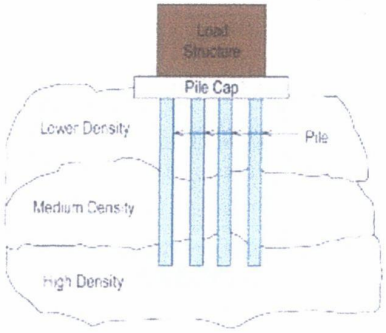


Design and construction of bored cast in situ piles are done in accordance with IS 2911 (part-1/Sec-2) – 2010. The work is basically making a borehole of designed diameter at the designated locations to the required depth, after providing temporary or permanent casing and stabilizing with bentonite slurry; and filling the borehole with concrete after placing reinforcement cage. The boreholes are drilled using rotary or percussion type drilling rigs, using direct mud circulation (DMC) or reverse mud circulation (RMC) methods. Drilling can also be done using rope operated or hydraulically operated grabbing tools. Concreting is usually done using tremie pipes.

Direct mud circulation method is the less expensive method for doing the boring activity. In this method bentonite slurry is constantly circulated into the bore hole during the boring activity through the bailer pipes, and overflow is collected and redirected

GLOBE GEOTECHNIQUES

to the bentonite slurry tank. The density of bentonite slurry should be around 1.12. Bentonite has a property of becoming a jelly like substance once left undisturbed for a long time. This jelly acts as plastering on the walls of the bore holes, and thereby preventing the boreholes from caving. Direct mud circulation method is commonly used while boring with bailer and chisel, and reverse mud circulation is adopted for boring using auger. In reverse mud circulation method, the bentonite is directed into the borehole directly, and the return is collected through the drill pipe.

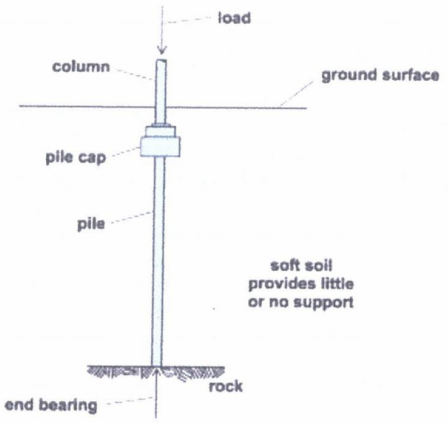

SAFE BEARING CAPACITY OF SOIL

S.No.	Depth, m	Ultimate Bearing Capacity of Soil, kPa.	Factor of Safety	Safe Bearing Capacity of Soil, kPa	Ultimate Bearing Capacity of Soil, t/sqm	Factor of Safety	Safe Bearing Capacity of Soil, t/sqm.
1	1.50	44.55	2.50	17.82	4.45	2.50	1.78
2	3.00	44.55	2.50	17.82	4.45	2.50	1.78
3	4.50	66.82	2.50	26.73	6.68	2.50	2.67
4	6.00	178.18	2.50	71.27	17.82	2.50	7.13
5	7.50	178.18	2.50	71.27	17.82	2.50	7.13
6	9.00	1113.63	2.50	445.45	111.36	2.50	44.55
7	10.50	1336.35	2.50	534.54	133.64	2.50	53.45
8	12.50	1559.08	2.50	623.63	155.91	2.50	62.36

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail com

GENERAL: All Structures have to be designed for higher seismic forces (Zone III) due to increased seismic activity in peninsular India in the last decade.

GEOTECHNICAL ENGINEER

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail com

GLOBE GEOTECHNIQUES

APPENDIX A

BOREHOLE LOG

Client: Mr.Chiranjeev

Soil Investigation carried out and Report prepared by: GLOBE GEOTECHNIQUES

Project : Geotechnical investigation for the proposed construction of G+13 Floors Structure at New Kumaran Nagar Extension, Sholinganallur, Chennai.

Location: BH-01

Started On : 29/01/2020; Ended On : 29/01/2020 G.W.T: 1.00 m below existing ground level Final Depth: 12.50 m

R.L of Layer (m)	G.W.T. (m)	Soil Profile	Engineering Description of Soil	SPT - Details: Depth of SPT below E.G.L (m)	0-15 cm	15-30 cm	30-45 cm	N-Value	Graphical Representation of SPT (0 10 20 30 40 50 60 70 80 90)	Relative Density/Consistency	Type of Sample
GL			Light Greyish Sandy Clay								
			Light Greyish Sandy Clay								
1.00	GWT		Light Greyish Sandy Clay								
			Light Greyish Sandy Clay								
			Light Greyish Sandy Clay								
1.50			Light Greyish Sandy Clay	1.50	1	1	1	2		Very Soft	DS
			Light Greyish Sandy Clay								
			Light Greyish Sandy Clay								
3.00			Light Greyish Sandy Clay	3.00	1	1	1	2		Very Soft	DS
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
4.50			Dark Greyish Clayey Silty Fine Sand	4.50	1	1	2	3		Very Loose	DS
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
6.00			Dark Greyish Clayey Silty Fine Sand	6.00	4	4	4	8		Loose	DS
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
7.50			Light Greyish Clayey Medium to Fine Sand	7.50	4	4	4	8		Loose	DS
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
9.00			Light Greyish Clayey Medium to Fine Sand	9.00	10	50 / 4 cm Bal				Very Dense	DS
			Soft Weathered / Disintegrated Rock								
			Soft Weathered / Disintegrated Rock								
10.50			Soft Weathered / Disintegrated Rock	10.50	50 / 10 cm Balance					Very Dense	DS
			Soft Weathered / Disintegrated Rock								
			Soft Weathered / Disintegrated Rock								
12.50			Soft Weathered / Disintegrated Rock	12.50	50 / 15 cm Balance					Very Dense	DS
			Hard Rock								

Fig. 2.1 Soil Profile at BH-01 Location

BORE HOLE IS TERMINATED AT THE DEPTH OF 12.50 m FROM EXISTING GROUND LEVEL

GLOBE GEOTECHNIQUES

Client: Mr.Chiranjeev

Soil Investigation carried out and Report prepared by: GLOBE GEOTECHNIQUES

Project : Geotechnical investigation for the proposed construction of G+13 Floors Structure at New Kumaran Nagar Extension, Sholinganallur, Chennai.

Location: BH-02

Started On : 29/01/2020; Ended On : 29/01/2020 G.W.T: 0.70 m below existing ground level Final Depth: 10.50 m

R.L of Layer (m)	G.W.T. (m)	Soil Profile	Engineering Description of Soil	SPT - Details: Depth of SPT below E.G.L (m)	0-15 cm	15-30 cm	30-45 cm	N-Value	Graphical Representation of SPT (0 10 20 30 40 50 60 70 80 90)	Relative Density/Consistency	Type of Sample
GL			Light Greyish Sandy Clay								
	GWT		Light Greyish Sandy Clay								
0.70			Light Greyish Sandy Clay								
			Light Greyish Sandy Clay								
			Light Greyish Sandy Clay								
1.50			Light Greyish Sandy Clay	1.50	1	1	2	3		Soft	DS
			Light Greyish Sandy Clay								
			Light Greyish Sandy Clay								
3.00			Light Greyish Sandy Clay	3.00	0	0	1	1		Very Soft	DS
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
4.50			Dark Greyish Clayey Silty Fine Sand	4.50	1	1	1	2		Very Loose	DS
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
6.00			Dark Greyish Clayey Silty Fine Sand	6.00	1	2	4	6		Loose	DS
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
7.50			Light Greyish Clayey Medium to Fine Sand	7.50	3	3	4	7		Loose	DS
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
9.00			Light Greyish Clayey Medium to Fine Sand	9.00	50 / 8 cm Balance					Very Dense	DS
			Soft Weathered / Disintegrated Rock								
			Soft Weathered / Disintegrated Rock								
10.50			Soft Weathered / Disintegrated Rock	10.50	50 / 2 cm Balance					Very Dense	DS
			Hard Rock								

Fig. 2.2 Soil Profile at BH-01 Location

BORE HOLE IS TERMINATED AT THE DEPTH OF 10.50 m FROM EXISTING GROUND LEVEL

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail com

Client: Mr.Chiranjeev

Soil Investigation carried out and Report prepared by: GLOBE GEOTECHNIQUES

Project : Geotechnical investigation for the proposed construction of G+13 Floors Structure at New Kumaran Nagar Extension, Sholinganallur, Chennai.

Location: BH-03

Started On : 30/01/2020; Ended On : 30/01/2020 G.W.T: 0.70 m below existing ground level Final Depth: 10.50 m

R.L of Layer (m)	G.W.T. (m)	Soil Profile	Engineering Description of Soil	SPT - Details: Depth of SPT below E.G.L (m)	0-15 cm	15-30 cm	30-45 cm	N-Value	Graphical Representation of SPT (0 10 20 30 40 50 60 70 80 90)	Relative Density/Consistency	Type of Sample
GL			Dark Greyish Sandy Clay								
			Dark Greyish Sandy Clay								
0.70	GWT		Dark Greyish Sandy Clay								
			Dark Greyish Sandy Clay								
			Dark Greyish Sandy Clay								
1.50			Dark Greyish Sandy Clay	1.50	1	1	2	3		Soft	DS
			Dark Greyish Sandy Clay								
			Dark Greyish Sandy Clay								
3.00			Dark Greyish Sandy Clay	3.00	0	1	1	2		Very Soft	DS
			Dark Greyish Sandy Clay								
			Dark Greyish Sandy Clay								
			Dark Greyish Sandy Clay								
			Dark Greyish Sandy Clay								
4.50			Dark Greyish Sandy Clay	4.50	1	1	2	3		Soft	DS
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
6.00			Dark Greyish Clayey Silty Fine Sand	6.00	2	3	3	6		Loose	DS
			Dark Greyish Medium to Fine Sand with Shells								
			Dark Greyish Medium to Fine Sand with Shells								
			Dark Greyish Medium to Fine Sand with Shells								
7.50			Dark Greyish Medium to Fine Sand with Shells	7.50	3	6	4	10		Loose	DS
			Dark Greyish Medium to Fine Sand with Shells								
			Dark Greyish Medium to Fine Sand with Shells								
			Dark Greyish Medium to Fine Sand with Shells								
9.00			Dark Greyish Medium to Fine Sand with Shells	9.00	50 / 3 cm Balance					Very Dense	DS
			Soft Weathered / Disintegrated Rock								
			Soft Weathered / Disintegrated Rock								
10.50			Soft Weathered / Disintegrated Rock	10.50	50 / 7 cm Balance					Very Dense	DS
			Hard Rock								

Fig. 2.3 Soil Profile at BH-03 Location

BORE HOLE IS TERMINATED AT THE DEPTH OF 10.50 m FROM EXISTING GROUND LEVEL

GLOBE GEOTECHNIQUES

Client: Mr.Chiranjeev

Soil Investigation carried out and Report prepared by: GLOBE GEOTECHNIQUES

Project : Geotechnical investigation for the proposed construction of G+13 Floors Structure at New Kumaran Nagar Extension, Sholinganallur, Chennai.

Location: BH-04

Started On : 30/01/2020; Ended On : 30/01/2020 G.W.T: 1.00 m below existing ground level Final Depth: 10.70 m

R.L of Layer (m)	G.W.T. (m)	Soil Profile	Engineering Description of Soil	SPT - Details: Depth of SPT below E.G.L (m)	0-15 cm	15-30 cm	30-45 cm	N-Value	Graphical Representation of SPT (0 10 20 30 40 50 60 70 80 90)	Relative Density/Consistency	Type of Sample
GL			Light Greyish Sandy Clay								
	GWT		Light Greyish Sandy Clay								
1.00			Light Greyish Sandy Clay								
			Light Greyish Sandy Clay								
			Light Greyish Sandy Clay								
1.50			Light Greyish Sandy Clay	1.50	0	1	1	2		Very Soft	DS
			Light Greyish Sandy Clay								
			Light Greyish Sandy Clay								
3.00			Light Greyish Sandy Clay	3.00	1	1	2	3		Soft	DS
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
4.50			Dark Greyish Clayey Silty Fine Sand	4.50	2	2	3	5		Loose	DS
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
6.00			Dark Greyish Clayey Silty Fine Sand	6.00	3	4	4	8		Loose	DS
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
7.50			Light Greyish Clayey Medium to Fine Sand	7.50	5	5	6	11		Medium	DS
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
9.00			Light Greyish Clayey Medium to Fine Sand	9.00	50 / 2 cm Balance					Very Dense	DS
			Soft Weathered / Disintegrated Rock								
			Soft Weathered / Disintegrated Rock								
10.70			Soft Weathered / Disintegrated Rock	10.70	50 / 4 cm Balance					Very Dense	DS
			Hard Rock								

Fig. 2.4 Soil Profile at BH-04 Location

BORE HOLE IS TERMINATED AT THE DEPTH OF 10.70 m FROM EXISTING GROUND LEVEL

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail com

Client: Mr.Chiranjeev

Soil Investigation carried out and Report prepared by: GLOBE GEOTECHNIQUES

Project : Geotechnical investigation for the proposed construction of G+13 Floors Structure at New Kumaran Nagar Extension, Sholinganallur, Chennai.

Location: BH-05

Started On : 31/01/2020; Ended On : 31/01/2020 G.W.T: 1.10 m below existing ground level Final Depth: 10.50 m

R.L of Layer (m)	G.W.T. (m)	Soil Profile	Engineering Description of Soil	SPT - Details: Depth of SPT below E.G.L (m)	0-15 cm	15-30 cm	30-45 cm	N-Value	Graphical Representation of SPT (0 10 20 30 40 50 60 70 80 90)	Relative Density/Consistency	Type of Sample
GL			Light Greyish Sandy Clay with Shell								
			Light Greyish Sandy Clay with Shell								
1.10	GWT		Light Greyish Sandy Clay with Shell								
			Light Greyish Sandy Clay with Shell								
			Light Greyish Sandy Clay with Shell								
1.50			Light Greyish Sandy Clay with Shell	1.50	1	2	2	4		Very Soft	DS
			Light Greyish Sandy Clay with Shell								
			Light Greyish Sandy Clay with Shell								
3.00			Light Greyish Sandy Clay with Shell	3.00	1	1	2	3		Soft	DS
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
4.50			Dark Greyish Clayey Silty Fine Sand	4.50	2	2	2	4		Loose	DS
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
6.00			Dark Greyish Clayey Silty Fine Sand	6.00	2	3	3	6		Loose	DS
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
7.50			Light Greyish Clayey Medium to Fine Sand	7.50	6	8	8	16		Medium	DS
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
9.00			Light Greyish Clayey Medium to Fine Sand	9.00	50 / 8 cm Balance					Very Dense	DS
			Soft Weathered / Disintegrated Rock								
			Soft Weathered / Disintegrated Rock								
10.50			Soft Weathered / Disintegrated Rock	10.50	50 / 10 cm Balance					Very Dense	DS
			Hard Rock								

Fig. 2.5 Soil Profile at BH-05 Location

BORE HOLE IS TERMINATED AT THE DEPTH OF 10.50 m FROM EXISTING GROUND LEVEL

GLOBE GEOTECHNIQUES

Client: Mr.Chiranjeev

Soil Investigation carried out and Report prepared by: GLOBE GEOTECHNIQUES

Project : Geotechnical investigation for the proposed construction of G+13 Floors Structure at New Kumaran Nagar Extension, Sholinganallur, Chennai.

Location: BH-06

Started On : 31/01/2020; Ended On : 31/01/2020 G.W.T: 1.10 m below existing ground level Final Depth: 10.50 m

R.L of Layer (m)	G.W.T. (m)	Soil Profile	Engineering Description of Soil	SPT - Details: Depth of SPT below E.G.L (m)	0-15 cm	15-30 cm	30-45 cm	N-Value	Graphical Representation of SPT (0 10 20 30 40 50 60 70 80 90)	Relative Density/Consistency	Type of Sample
GL			Light Greyish Sandy Clay with Shell								
			Light Greyish Sandy Clay with Shell								
1.10	GWT		Light Greyish Sandy Clay with Shell								
			Light Greyish Sandy Clay with Shell								
			Light Greyish Sandy Clay with Shell								
1.50			Light Greyish Sandy Clay with Shell	1.50	1	1	2	3		Soft	DS
			Light Greyish Sandy Clay with Shell								
			Light Greyish Sandy Clay with Shell								
3.50			Light Greyish Sandy Clay with Shell	3.50	1	1	1	2		Very Soft	DS
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
4.50			Dark Greyish Clayey Silty Fine Sand	4.50	1	1	2	3		Very Loose	DS
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
			Dark Greyish Clayey Silty Fine Sand								
5.75			Dark Greyish Clayey Silty Fine Sand	5.75	1	2	3	5		Loose	DS
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
7.50			Light Greyish Clayey Medium to Fine Sand	7.50	4	4	5	9		Loose	DS
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
			Light Greyish Clayey Medium to Fine Sand								
9.00			Light Greyish Clayey Medium to Fine Sand	9.00	50 / 13 cm Balance					Very Dense	DS
			Soft Weathered / Disintegrated Rock								
			Soft Weathered / Disintegrated Rock								
10.50			Soft Weathered / Disintegrated Rock	10.50	Hammer Rebound					Very Dense	DS
			Hard Rock								

Fig. 2.6 Soil Profile at BH-06 Location

BORE HOLE IS TERMINATED AT THE DEPTH OF 10.50 m FROM EXISTING GROUND LEVEL

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail com

APPENDIX B

LABORATORY TEST RESULTS

TABLE – 1
Correlations of SPT N values with Common properties of soils

A) Granular Soil

S.NO.	Standard Penetration No., SPT N	Description	Relative Density, Dr %	Approx. Angle of Internal Friction, Φ°	Approx. Rang of Most. Unit Wt.,ɣ kN/m3
1	< 4	Very Loose	< 20	< 29	11 to 16
2	04 to 10	Loose	20 to 40	29 to 30	14 to 18
3	10 to 30	Medium	40 to 60	30 to 36	17 to 20
4	30 to 50	Dense	60 to 80	36 to 41	17 to 22
5	> 50	Very Dense	> 80	> 41	20 to 29

B) Cohesive Soil

S.NO.	Standard Penetration No., SPT N	Description	Unconfined Compressive Strength(q_u), kPa	Cohesive Stength (c), kPa	Approx. Rang of Most. Unit Wt.,ɣ kN/m3
1	< 02	Very Soft	0 to 25	0 to 12.50	14.40 to 16.00
2	02 to 04	Soft	25 to 50	12.50 to 25	16.00 to 17.74
3	04 to 08	Firm	50 to 100	25 to 50	17.60 to 19.20
4	08 to 15	Stiff	100 to 200	50 to 100	19.20 to 20.80
5	15 to 30	Very Stiff	200 to 400	100 to 200	20.80 to 22.40
6	> 30	Hard	> 400	> 200	> 20.00

Note: These values are most appropriate values in general. However, the soil properties vary between sites to site and hence it shall be used only for guidance

ABBREVIATION :

W_N	Natural Moisture content (%)
W_L	Liquid limit (%)
W_P	Plasticity Limit (%)
I_P	Plasticity Index (%)
F.S.I.	Free Swell Index (%)
IS	Indian Standard Classification
CL	Low Compressibility Clay of with WL < 35%
CI	Intermediate Compressibility Clay of with 35%<WL<50%
CH	High Compressibility Clay of with >50%

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail.com

Table of Laboratory Test Results

Client: Mr.Chiranjeev

Soil Investigation carried out and Report prepared by: GLOBE GEOTECHNIQUES

Project : Geotechnical investigation for the proposed construction of G+13 Floors Structure at New Kumaran Nagar Extension, Sholinganallur, Chennai.

Bore Hole No	Depth (m)		Type of Soil	Grain Size Analaysis (Particle Retained in IS Sieve) %					Atterberg Limits			IS Classification	Natural Moisture Content %	Remarks
	From	To		4.75 mm	2.00 mm	0.425 mm	0.075 mm	Fines	LL	PL	PI			
BH 1	0.00	3.00	Sandy Clay	0.41	4.26	2.98	11.36	80.99	33.0	15.0	18.0	CL	11.36	
	3.00	6.00	Clayey Silty Fine Sand	0.87	11.23	5.36	16.32	66.22	-	-	-	SM	13.54	
	6.00	9.00	Clayey Medium to Fine Sand	0.32	10.21	19.85	25.32	44.30	-	-	-	SP	12.59	
	9.00	12.50	SDR	-	-	-	-	-	-	-	-	-	-	
BH 2	0.00	3.00	Sandy Clay	0.36	3.54	2.55	10.56	82.99	30.0	14.0	16.0	CL	11.89	
	3.00	6.00	Clayey Silty Fine Sand	0.68	10.22	4.89	13.54	70.67	-	-	-	SM	13.69	
	6.00	9.00	Clayey Medium to Fine Sand	1.36	12.36	15.48	19.56	51.24	-	-	-	SP	12.58	
	9.00	10.50	SDR	-	-	-	-	-	-	-	-	-	-	
	0.00	4.50	Sandy Clay	0.41	2.89	3.65	11.54	81.51	31.0	14.0	17.0	CL	14.15	

GLOBE GEOTECHNIQUES

APPENDIX C

GENERAL COMMENTS

GENERAL INSTRUCTIONS (FOR SHALLOW FOUNDATIONS)

STRUCTURAL FILL

It shall be made of compacted coarse gravel material and placed in layers of 50cm thickness with a minimum compaction of 95% of maximum dry density.

FOUNDATION CONSIDERATIONS

A PCC (Plain Cement Concrete) layer of 10cm thickness is recommended below the foundations.

Any over excavation in the foundation trenches should be re-filled by plain concrete and any disturbed and loose materials found in the foundation trenches should be removed before placement of P.C.C.

EXCAVATION

Excavation through the overburden soil can be carried out by conventional equipment such as dozers and Poclain Excavators.

BACKFILLING AND COMPACTION

Backfilling materials shall be granular with durable particles free of deleterious matter, meeting the gradation requirement. It shall not contain stones larger than 80 mm; more than 35% fines passing # 200 sieves and is free of any deleterious foreign matter. Backfilling materials shall be placed in horizontal layers not exceeding 25 cm thickness and each layer shall be compacted to atleast 95% of the maximum dry density. If there is any over excavations in the foundation trenches, which should be refilled with either structural fill or lean concrete and all the loose and disturbed materials, should be cleared from the foundation trenches.

GLOBE GEOTECHNIQUES

GENERAL INSTRUCTIONS (FOR DEEP FOUNDATIONS)

Pile foundations shall be designed in such a way that the load from the structure can be transmitted to the sub-surface with adequate factor of safety against shear failure of sub-surface and without causing such settlement (differential or total), which may result in structural damage and/or functional distress under permanent/transient loading. The pile shaft should have adequate structural capacity to withstand all loads (vertical, axial or otherwise) and moments which are to be transmitted to the subsoil and shall be designed according to IS 456.

MATERIALS AND STRESSES

CEMENT:

The cement used shall be any of the following:

a) 33 Grade ordinary Portland cement conforming to IS 269,

b) 43 Grade ordinary Portland cement conforming to IS 8112,

c) 53 Grade ordinary Portland cement conforming to IS 12269,

d) Rapid hardening Portland cement conforming to IS 8041,

e) Portland slag cement conforming to IS 455,

f) Portland pozzolana cement (fly ash based) conforming to IS 1489 (Part 1),

g) Portland pozzolana cement (calcined clay based) conforming to IS 1489 (Part 2),

h) Hydrophobic cement conforming to IS 8043,

i) Low beat Portland cement conforming to IS 12600,and

j) Sulphate resisting Portland cement conforming to IS 12330.

STEEL REINFORCEMENT STEEL SHALL BE ANY OF THE FOLLOWING:

a) Mild steel and medium tensile steel bars conforming to IS 432 (Part 1), b) High strength deformed steel bars conforming to IS 1786, and c) Structural steel conforming to IS 2062.

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail.com

CONCRETE:

Consistency of concrete to be used for driven cast in-situ piles shall be consistent with the method of installation of piles. Concrete shall be so designed or chosen as to have a homogeneous mix having a slump/workability consistent with the method of concreting under the given conditions of pile installation.The average compressive stress under working load should not exceed 25 percent of the specified works cube strength at 28 days calculated on the total cross-sectional area of the pile. Where the casing of the pile is permanent, of adequate thickness and of suitable shape, the allowable compressive stress may be increased.

For the concrete, water and aggregates specifications laid down in IS 456 shall be followed in general. The slump should be 150 to 180 mm at the time of pouring. The minimum grade of concrete to be used for piling shall be M 25. For sub aqueous concrete, the requirements specified in IS 456 shall be followed. The minimum cement content shall be 400 kg/m^3. However, with proper mix design and use of proper admixtures the cement content may be reduced but in no case the cement content shall be less than 350 kg/m^3.

Piles shall be installed as accurately as possible according to the design and drawings either vertically or to the specified batter. Greater care should be exercised in respect of installation of single piles or piles in two pile groups. As a guide, for vertical piles, an angular deviation of 1.5 percent and for raker piles, a deviation of 4 percent should not be exceeded. Piles should not deviate more than 75 mm or D/6 whichever is less (75 mm or

GLOBE GEOTECHNIQUES

D/10 whichever is more in case of piles having diameter more than 600 mm) from their designed positions at the working level. In the case of single pile under a column the positional deviation should not be more than 50 mm or D/6 whichever is less (100 mm in case of piles having diameter more than 600 mm). Greater tolerance may be prescribed for piles cast over water and for raking piles. For piles to be cut-off at a substantial depth below the working level, the design shall provide for the worst combination of the above tolerances in position and inclination. In case of piles deviating beyond these limits and to such an extent that the resulting eccentricity cannot be taken care of by redesign of the pile cap or pile ties, the piles shall be replaced or supplemented by additional piles.

GENERAL COMMENTS

The recommendations for foundation design and construction are based on the information obtained from borehole drilled at location. When foundation construction is underway, the recommendations of this report should be checked through field inspection, to validate the information for use during the construction stage. Any variation in underground conditions revealed by the borehole should be brought to our attention.

For GLOBE GEOTECHNIQUES

G.MANOJ KUMAR, B.E (CIVIL), M.E (GEO-TECH)
Mobile: 9445315710 / 9994712791.
E-mail: globegeotechniques@gmail.com

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail.com

GLOBE GEOTECHNIQUES

DESIGN OF PILE FOUNDATION (Refer-BH-01 - BH-06)

Refer, IS:2911(Part I/Sec 2)-1979, Reaffirmed 1997

1.0 Type of Installation of Pile **Bored Cast in Situ**

1.1 Geometrical Data

Assumed Diameter of pile(D):	**300.0**	mm
Assumed R.L of E.G.L:	0.000	m
Length of pile below E.G.L.(l) :	**12.500**	m
R.L. of Bot. of Pile	12.50	m

1.2 Design of Pile for Vertical Compression

1.2.1 Computation of Skin Resistance:

1.2.1.1 **Layer-I**

Type of Strata:	Clay	
Average SPT of the strata,N:	7	
Bulk Density of the strata,γ:	16	kN/m^3
Undrained Cohesion, Cu:	46.6667	kPa
R.L of top of Strata:	0.00	m
R.L of bottom of Strata:	3.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	0.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	18.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	9.00	kN/m^2
Adhesion Factor, α:	0.70	
Skin Resistance of the pile,q_s:	92.36	kN

1.2.1.2 **Layer-II**

Type of Strata:	Sand	
Average SPT of the strata,N:	10	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	30	Deg.
R.L of top of Strata:	3.00	m
R.L of bottom of Strata:	6.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	18.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	33.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	25.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	41.63	kN

(q_s:σ*k*tanϕ*pi()*d*Ic)



1.2.1.3 **Layer-III**

Type of Strata:	Sand	
Average SPT of the strata,N:	15	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	31.5	Deg.
R.L of top of Strata:	6.00	m
R.L of bottom of Strata:	9.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	33.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	48.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	40.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	70.17	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		

1.2.1.4 **Layer-IV**


Type of Strata:	Sand	
Average SPT of the strata,N:	20	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	33	Deg.
R.L of top of Strata:	9.00	m
R.L of bottom of Strata:	12.50	m
Average Thickness of Strata,I_c:	3.50	m
Effective overburden pressure over the top of strata,σ_{top}:	48.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	65.50	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	56.75	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	121.57	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		
Ultimate Skin Resistance,q_s:	**325.7**	**kN**

1.2.2 Computation of End Bearing Resistance:

Type of Bearing Strata	Weathered Rock	
Cross-Sectional Area of pile,Ap:	0.071	m^2
R.L of bottom of pile:	12.50	
Minimum SPT-value of the Bearing Strata	50	
Angle of Shearing Resistance(ASR)	41.00	Degrees
Bearing Capacity Factor(Nq)	70.00	
Effecitve Over Burden Pressure at the bottom of pile (q)	65.50	kPa

GLOBE GEOTECHNIQUES

	(limited to a maximum value produced by a soil layer of thickness equal to 20 times the diameter of pile from the N.G.L.)		
	Ultimate End Bearing Resistance (Qp) (Qp=Ap*q*Nq)	**324.1**	**kN**
1.3.0	**Ultimate Load Carrying Capacity (Qu=Qp+Qs**	**649.8**	**kN**
	Safe Load Carrying Capacity (Qsafe =Qu/2.5)	**259.9**	**kN**
	However, limit Q_{safe} to the structural capacity of pile:	**250.0**	**kN**



DESIGN OF PILE FOUNDATION (Refer-BH-01 - BH-06)

Refer, IS:2911(Part I/Sec 2)-1979, Reaffirmed 1997

1.0 Type of Installation of Pile **Bored Cast in Situ**

1.1 Geometrical Data

Assumed Diameter of pile(D):	**400.0**	mm
Assumed R.L of E.G.L:	0.000	m
Length of pile below E.G.L.(l) :	**12.500**	m
R.L. of Bot. of Pile	12.50	m

1.2 Design of Pile for Vertical Compression

1.2.1 Computation of Skin Resistance:

1.2.1.1 **Layer-I**

Type of Strata:	Clay	
Average SPT of the strata,N:	7	
Bulk Density of the strata,γ:	16	kN/m^3
Undrained Cohesion, Cu:	46.6667	kPa
R.L of top of Strata:	0.00	m
R.L of bottom of Strata:	3.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	0.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	18.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	9.00	kN/m^2
Adhesion Factor, α:	0.70	
Skin Resistance of the pile,q_s:	123.15	kN

1.2.1.2 **Layer-II**

Type of Strata:	Sand	
Average SPT of the strata,N:	10	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	30	Deg.
R.L of top of Strata:	3.00	m
R.L of bottom of Strata:	6.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	18.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	33.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	25.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	55.50	kN

(q_s:σ*k*tanϕ*pi()*d*Ic)

GLOBE GEOTECHNIQUES

1.2.1.3 **Layer-III**

Type of Strata:	Sand	
Average SPT of the strata,N:	15	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	31.5	Deg.
R.L of top of Strata:	6.00	m
R.L of bottom of Strata:	9.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	33.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	48.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	40.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	93.56	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		

1.2.1.4 **Layer-IV**


Type of Strata:	Sand	
Average SPT of the strata,N:	20	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	33	Deg.
R.L of top of Strata:	9.00	m
R.L of bottom of Strata:	12.50	m
Average Thickness of Strata,I_c:	3.50	m
Effective overburden pressure over the top of strata,σ_{top}:	48.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	65.50	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	56.75	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	162.09	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		
Ultimate Skin Resistance,q_s:	**434.3**	**kN**

1.2.2 Computation of End Bearing Resistance:

Type of Bearing Strata	Weathered Rock	
Cross-Sectional Area of pile,Ap:	0.126	m^2
R.L of bottom of pile:	12.50	
Minimum SPT-value of the Bearing Strata	50	
Angle of Shearing Resistance(ASR)	41.00	Degrees
Bearing Capacity Factor(Nq)	70.00	
Effecitve Over Burden Pressure at the bottom of pile (q)	65.50	kPa



	(limited to a maximum value produced by a soil layer of thickness equal to 20 times the diameter of pile from the N.G.L.)		
	Ultimate End Bearing Resistance (Qp) (Qp=Ap*q*Nq)	**576.2**	**kN**
1.3.0	**Ultimate Load Carrying Capacity (Qu=Qp+Qs**	**1010.5**	**kN**
	Safe Load Carrying Capacity (Qsafe =Qu/2.5)	**404.2**	**kN**
	However, limit Q_{safe} to the structural capacity of pile:	**380.0**	**kN**



DESIGN OF PILE FOUNDATION (Refer-BH-01 - BH-06)

Refer, IS:2911(Part I/Sec 2)-1979, Reaffirmed 1997

1.0 Type of Installation of Pile **Bored Cast in Situ**

1.1 Geometrical Data

Assumed Diameter of pile(D):	**450.0**	mm
Assumed R.L of E.G.L:	0.000	m
Length of pile below E.G.L.(l) :	**12.500**	m
R.L. of Bot. of Pile	12.50	m

1.2 Design of Pile for Vertical Compression

1.2.1 Computation of Skin Resistance:

1.2.1.1 **Layer-I**

Type of Strata:	Clay	
Average SPT of the strata,N:	7	
Bulk Density of the strata,γ:	16	kN/m^3
Undrained Cohesion, Cu:	46.6667	kPa
R.L of top of Strata:	0.00	m
R.L of bottom of Strata:	3.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	0.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	18.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	9.00	kN/m^2
Adhesion Factor, α:	0.70	
Skin Resistance of the pile,q_s:	138.54	kN

1.2.1.2 **Layer-II**

Type of Strata:	Sand	
Average SPT of the strata,N:	10	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	30	Deg.
R.L of top of Strata:	3.00	m
R.L of bottom of Strata:	6.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	18.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	33.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	25.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	62.44	kN

(q_s:σ*k*tanϕ*pi()*d*Ic)

GLOBE GEOTECHNIQUES

1.2.1.3

Layer-III

Type of Strata:	Sand	
Average SPT of the strata,N:	15	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	31.5	Deg.
R.L of top of Strata:	6.00	m
R.L of bottom of Strata:	9.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	33.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	48.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	40.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	105.26	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		

1.2.1.4

Layer-IV

Type of Strata:	Sand	
Average SPT of the strata,N:	20	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	33	Deg.
R.L of top of Strata:	9.00	m
R.L of bottom of Strata:	12.50	m
Average Thickness of Strata,I_c:	3.50	m
Effective overburden pressure over the top of strata,σ_{top}:	48.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	65.50	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	56.75	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	182.35	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		
Ultimate Skin Resistance,q_s:	**488.6**	**kN**

1.2.2 Computation of End Bearing Resistance:

Type of Bearing Strata	Weathered Rock	
Cross-Sectional Area of pile,Ap:	0.159	m^2
R.L of bottom of pile:	12.50	
Minimum SPT-value of the Bearing Strata	50	
Angle of Shearing Resistance(ASR)	41.00	Degrees
Bearing Capacity Factor(Nq)	70.00	
Effecitve Over Burden Pressure at the bottom of pile (q)	65.50	kPa

GLOBE GEOTECHNIQUES

	(limited to a maximum value produced by a soil layer of thickness equal to 20 times the diameter of pile from the N.G.L.)		
	Ultimate End Bearing Resistance (Qp) (Qp=Ap*q*Nq)	**729.2**	**kN**
1.3.0	**Ultimate Load Carrying Capacity (Qu=Qp+Qs**	**1217.8**	**kN**
	Safe Load Carrying Capacity (Qsafe =Qu/2.5)	**487.1**	**kN**
	However, limit Q_{safe} to the structural capacity of pile:	**480.0**	**kN**



DESIGN OF PILE FOUNDATION (Refer-BH-01 - BH-06)

Refer, IS:2911(Part I/Sec 2)-1979, Reaffirmed 1997

1.0 Type of Installation of Pile **Bored Cast in Situ**

1.1 Geometrical Data

Assumed Diameter of pile(D):	**500.0**	mm
Assumed R.L of E.G.L:	0.000	m
Length of pile below E.G.L.(l) :	**12.500**	m
R.L. of Bot. of Pile	12.50	m

1.2 Design of Pile for Vertical Compression

1.2.1 Computation of Skin Resistance:

1.2.1.1 **Layer-I**

Type of Strata:	Clay	
Average SPT of the strata,N:	7	
Bulk Density of the strata,γ:	16	kN/m^3
Undrained Cohesion, Cu:	46.6667	kPa
R.L of top of Strata:	0.00	m
R.L of bottom of Strata:	3.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	0.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	18.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	9.00	kN/m^2
Adhesion Factor, α:	0.70	
Skin Resistance of the pile,q_s:	153.94	kN

1.2.1.2 **Layer-II**

Type of Strata:	Sand	
Average SPT of the strata,N:	10	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	30	Deg.
R.L of top of Strata:	3.00	m
R.L of bottom of Strata:	6.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	18.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	33.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	25.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	69.38	kN

(q_s:σ*k*tanϕ*pi()*d*Ic)

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail com

1.2.1.3 **Layer-III**

Type of Strata:	Sand	
Average SPT of the strata,N:	15	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	31.5	Deg.
R.L of top of Strata:	6.00	m
R.L of bottom of Strata:	9.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	33.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	48.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	40.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	116.95	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		

1.2.1.4 **Layer-IV**

Type of Strata:	Sand	
Average SPT of the strata,N:	20	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	33	Deg.
R.L of top of Strata:	9.00	m
R.L of bottom of Strata:	12.50	m
Average Thickness of Strata,I_c:	3.50	m
Effective overburden pressure over the top of strata,σ_{top}:	48.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	65.50	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	56.75	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	202.61	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		
Ultimate Skin Resistance,q_s:	**542.9**	**kN**

1.2.2 Computation of End Bearing Resistance:

Type of Bearing Strata	Weathered Rock	
Cross-Sectional Area of pile,Ap:	0.196	m^2
R.L of bottom of pile:	12.50	
Minimum SPT-value of the Bearing Strata	50	
Angle of Shearing Resistance(ASR)	41.00	Degrees
Bearing Capacity Factor(Nq)	70.00	
Effecitve Over Burden Pressure at the bottom of pile (q)	65.50	kPa

GLOBE GEOTECHNIQUES

	(limited to a maximum value produced by a soil layer of thickness equal to 20 times the diameter of pile from the N.G.L.)		
	Ultimate End Bearing Resistance (Qp) (Qp=Ap*q*Nq)	**900.3**	**kN**
1.3.0	**Ultimate Load Carrying Capacity (Qu=Qp+Qs**	**1443.1**	**kN**
	Safe Load Carrying Capacity (Qsafe =Qu/2.5)	**577.3**	**kN**
	However, limit Q_{safe} to the structural capacity of pile:	**560.0**	**kN**

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail com

DESIGN OF PILE FOUNDATION (Refer-BH-01 - BH-06)

Refer, IS:2911(Part I/Sec 2)-1979, Reaffirmed 1997

1.0 Type of Installation of Pile **Bored Cast in Situ**

1.1 Geometrical Data

Assumed Diameter of pile(D):	**600.0**	mm
Assumed R.L of E.G.L:	0.000	m
Length of pile below E.G.L.(l) :	**12.500**	m
R.L. of Bot. of Pile	12.50	m

1.2 Design of Pile for Vertical Compression

1.2.1 Computation of Skin Resistance:

1.2.1.1 **Layer-I**

Type of Strata:	Clay	
Average SPT of the strata,N:	7	
Bulk Density of the strata,γ:	16	kN/m^3
Undrained Cohesion, Cu:	46.6667	kPa
R.L of top of Strata:	0.00	m
R.L of bottom of Strata:	3.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	0.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	18.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	9.00	kN/m^2
Adhesion Factor, α:	0.70	
Skin Resistance of the pile,q_s:	184.73	kN

1.2.1.2 **Layer-II**

Type of Strata:	Sand	
Average SPT of the strata,N:	10	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	30	Deg.
R.L of top of Strata:	3.00	m
R.L of bottom of Strata:	6.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	18.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	33.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	25.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	83.25	kN

(q_s:σ*k*tanϕ*pi()*d*Ic)

GLOBE GEOTECHNIQUES

1.2.1.3

Layer-III

Type of Strata:	Sand	
Average SPT of the strata,N:	15	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	31.5	Deg.
R.L of top of Strata:	6.00	m
R.L of bottom of Strata:	9.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	33.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	48.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	40.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	140.34	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		

1.2.1.4

Layer-IV

Type of Strata:	Sand	
Average SPT of the strata,N:	20	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	33	Deg.
R.L of top of Strata:	9.00	m
R.L of bottom of Strata:	12.50	m
Average Thickness of Strata,I_c:	3.50	m
Effective overburden pressure over the top of strata,σ_{top}:	48.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	65.50	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	56.75	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	243.14	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		
Ultimate Skin Resistance,q_s:	**651.5**	**kN**

1.2.2 Computation of End Bearing Resistance:

Type of Bearing Strata	Weathered Rock	
Cross-Sectional Area of pile,Ap:	0.283	m^2
R.L of bottom of pile:	12.50	
Minimum SPT-value of the Bearing Strata	50	
Angle of Shearing Resistance(ASR)	41.00	Degrees
Bearing Capacity Factor(Nq)	70.00	
Effecitve Over Burden Pressure at the bottom of pile (q)	65.50	kPa

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail com

	(limited to a maximum value produced by a soil layer of thickness equal to 20 times the diameter of pile from the N.G.L.)		
	Ultimate End Bearing Resistance (Qp) (Qp=Ap*q*Nq)	**1296.4**	**kN**
1.3.0	**Ultimate Load Carrying Capacity (Qu=Qp+Qs**	**1947.8**	**kN**
	Safe Load Carrying Capacity (Qsafe =Qu/2.5)	**779.1**	**kN**
	However, limit Q_{safe} to the structural capacity of pile:	**750.0**	**kN**



DESIGN OF PILE FOUNDATION (Refer-BH-01 - BH-06)

Refer, IS:2911(Part I/Sec 2)-1979, Reaffirmed 1997

1.0 Type of Installation of Pile **Bored Cast in Situ**

1.1 Geometrical Data

Assumed Diameter of pile(D):	**800.0**	mm
Assumed R.L of E.G.L:	0.000	m
Length of pile below E.G.L.(l) :	**12.500**	m
R.L. of Bot. of Pile	12.50	m

1.2 Design of Pile for Vertical Compression

1.2.1 Computation of Skin Resistance:

1.2.1.1 **Layer-I**

Type of Strata:	Clay	
Average SPT of the strata,N:	7	
Bulk Density of the strata,γ:	16	kN/m^3
Undrained Cohesion, Cu:	46.6667	kPa
R.L of top of Strata:	0.00	m
R.L of bottom of Strata:	3.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	0.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	18.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	9.00	kN/m^2
Adhesion Factor, α:	0.70	
Skin Resistance of the pile,q_s:	246.30	kN

1.2.1.2 **Layer-II**

Type of Strata:	Sand	
Average SPT of the strata,N:	10	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	30	Deg.
R.L of top of Strata:	3.00	m
R.L of bottom of Strata:	6.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	18.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	33.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	25.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	111.00	kN

(q_s:σ*k*tanϕ*pi()*d*Ic)

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail com

1.2.1.3 **Layer-III**

Type of Strata:	Sand	
Average SPT of the strata,N:	15	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	31.5	Deg.
R.L of top of Strata:	6.00	m
R.L of bottom of Strata:	9.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	33.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	48.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	40.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	187.13	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		

1.2.1.4 **Layer-IV**

Type of Strata:	Sand	
Average SPT of the strata,N:	20	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	33	Deg.
R.L of top of Strata:	9.00	m
R.L of bottom of Strata:	12.50	m
Average Thickness of Strata,I_c:	3.50	m
Effective overburden pressure over the top of strata,σ_{top}:	48.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	65.50	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	56.75	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	324.18	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		
Ultimate Skin Resistance,q_s:	**868.6**	**kN**

1.2.2 Computation of End Bearing Resistance:

Type of Bearing Strata	Weathered Rock	
Cross-Sectional Area of pile,Ap:	0.503	m^2
R.L of bottom of pile:	12.50	
Minimum SPT-value of the Bearing Strata	50	
Angle of Shearing Resistance(ASR)	41.00	Degrees
Bearing Capacity Factor(Nq)	70.00	
Effecitve Over Burden Pressure at the bottom of pile (q)	65.50	kPa

GLOBE GEOTECHNIQUES

	(limited to a maximum value produced by a soil layer of thickness equal to 20 times the diameter of pile from the N.G.L.)		
	Ultimate End Bearing Resistance (Qp) (Qp=Ap*q*Nq)	**2304.7**	**kN**
1.3.0	**Ultimate Load Carrying Capacity (Qu=Qp+Qs**	**3173.3**	**kN**
	Safe Load Carrying Capacity (Qsafe =Qu/2.5)	**1269.3**	**kN**
	However, limit Q_{safe} to the structural capacity of pile:	**1200.0**	**kN**

Er.G.MANOJ KUMAR B.E (Civil) M.E (Geotech)
Registered Geotechnical Consultant
GTE/2019/03/012 -CMDA
RGTE/TKDTCP/September/01/2024 DTCP
GLOBE GEOTECHNIQUES
New No 42 Old No 70, Bajanai Koil Street
Choolaimedu Chennai 600 094
Cell 9445315710 & 6381663653
Email globegeotechniques@gmail com

DESIGN OF PILE FOUNDATION (Refer-BH-01 - BH-06)

Refer, IS:2911(Part I/Sec 2)-1979, Reaffirmed 1997

1.0 Type of Installation of Pile **Bored Cast in Situ**

1.1 Geometrical Data

Assumed Diameter of pile(D):	**1000.0**	mm
Assumed R.L of E.G.L:	0.000	m
Length of pile below E.G.L.(l) :	**12.500**	m
R.L. of Bot. of Pile	12.50	m

1.2 Design of Pile for Vertical Compression

1.2.1 Computation of Skin Resistance:


1.2.1.1 **Layer-I**

Type of Strata:	Clay	
Average SPT of the strata,N:	7	
Bulk Density of the strata,γ:	16	kN/m^3
Undrained Cohesion, Cu:	46.6667	kPa
R.L of top of Strata:	0.00	m
R.L of bottom of Strata:	3.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	0.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	18.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	9.00	kN/m^2
Adhesion Factor, α:	0.70	
Skin Resistance of the pile,q_s:	307.88	kN

1.2.1.2 **Layer-II**

Type of Strata:	Sand	
Average SPT of the strata,N:	10	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	30	Deg.
R.L of top of Strata:	3.00	m
R.L of bottom of Strata:	6.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	18.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	33.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	25.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	138.76	kN

(q_s:σ*k*tanϕ*pi()*d*Ic)



1.2.1.3

Layer-III

Type of Strata:	Sand	
Average SPT of the strata,N:	15	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	31.5	Deg.
R.L of top of Strata:	6.00	m
R.L of bottom of Strata:	9.00	m
Average Thickness of Strata,I_c:	3.00	m
Effective overburden pressure over the top of strata,σ_{top}:	33.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	48.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	40.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	233.91	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		

1.2.1.4

Layer-IV

Type of Strata:	Sand	
Average SPT of the strata,N:	20	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	33	Deg.
R.L of top of Strata:	9.00	m
R.L of bottom of Strata:	12.50	m
Average Thickness of Strata,I_c:	3.50	m
Effective overburden pressure over the top of strata,σ_{top}:	48.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	65.50	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	56.75	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	405.23	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		
Ultimate Skin Resistance,q_s:	**1085.8**	**kN**

1.2.2 Computation of End Bearing Resistance:

Type of Bearing Strata	Weathered Rock	
Cross-Sectional Area of pile,Ap:	0.785	m^2
R.L of bottom of pile:	12.50	
Minimum SPT-value of the Bearing Strata	50	
Angle of Shearing Resistance(ASR)	41.00	Degrees
Bearing Capacity Factor(Nq)	70.00	
Effecitve Over Burden Pressure at the bottom of pile (q)	65.50	kPa

GLOBE GEOTECHNIQUES

	(limited to a maximum value produced by a soil layer of thickness equal to 20 times the diameter of pile from the N.G.L.)		
	Ultimate End Bearing Resistance (Qp) (Qp=Ap*q*Nq)	**3601.1**	**kN**
1.3.0	**Ultimate Load Carrying Capacity (Qu=Qp+Qs**	**4686.8**	**kN**
	Safe Load Carrying Capacity (Qsafe =Qu/2.5)	**1874.7**	**kN**
	However, limit Q_{safe} to the structural capacity of pile:	**1800.0**	**kN**





our services doesn't just end there

Buying & Selling Services

Property Buying Assistance, Property Selling Support, Market Price Analysis, Owner Outreach and Negotiation.

Legal & Documentation Services

Certified EC, Patta, legal opinions, property verification, due diligence, litigation solutions, and legal heir certificates.

Property Development & Approvals

Building plan approvals, construction, layout and sub-division approvals, zone conversion, and occupancy certification.

NRI & Investment Services

Escrow Services, Rentals, Litigation Solutions, Property Valuation and Property Management

Compliance & Special Services

Demolition, Vaasthu checks, regularization of unauthorized buildings, and office space solutions.



empowering your real estate decisions with smart tools

Property Valuation & Cost Estimation

Guideline Value, Apartment Composite Value, Stamp Duty & Registration Fees Calculator, Building Value Calculator, Capital Gains Calculator, Area Unit Converter, Length Unit Converter

Ownership, Compliance & Legal Verification

Encumbrance Certificate (EC) Search, Find Your SRO, Temple Property Check, WAQF Property Check, View Patta/Chitta, View FMB, Patta Analyzer, EC Analyzer

Zoning & Land Use Analysis

Land Use Zone Finder, CRZ Zone Check, Aquifer Zone Check, CBA Check, EWS Check, Road Width Check, Proposed Road Widening Check, FSI Calculator

Property Documentation & Workflow Tools

Forms & Templates, Document Generator, Document Translation, Dictionary

Vastu & Property Management Tools

Home Vastu Shastra, Plot Vastu Shastra, Property Management

Verified RealEstate™

We're honored to be part of your real estate journey

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996
www.verified.realestate