Verified RealEstate™

Your trusted partner for buying, selling, and managing property, ensuring hassle-free service with 100% transparency.

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996

Official Property Record

Digitally Verified Record - Powered by Verified RealEstate™



C.KANNAN, M.E. (Structure)
STRUCTURAL ENGINEER

Door .21, plot No. 257- W, Flat No. 2B
"Utopia Apartments" 2nd Floor,
4th Main Road, Indira Nagar,
Chennai- 600 020
Mobile: 9841249815
Email: kannankds2007@gmail.com

05-11-2024

STRUCTURAL STABILITY CERTIFICATE

It is certified that the Proposed Residential Building At No:21, Ramachandra Iyer Street, Street, T.Nagar, Chennai. Having Stilt plus Five upper floors is designed to resist earthquake. Check has been made safe and sound, I hereby certify that,

1. The minimum column width is 300 in stilt floor areas
2. The minimum grade of concrete is M25.
3. The design analysis using the code of practice for loading Standards as per IS-875 Part I to III and seismic force as per one code IS 1893, is carried out.

The Structure is safe and sound when used for the purpose for which it is designed.

C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

PROPOSED RESIDENTIAL BUILDING AT NO:21, RAMACHANDRA IYER STREET, STREET, T.NAGAR, CHENNAI.

GENERAL NOTE ON STRUCTURAL DESIGN.

1.0 GENERAL.

1.1 DESIGN BASIS

The proposed residential building consists of Stilt plus Five upper floors.

The design of this building is carried out based on frame analysis using STAAD CONNECT.

1.2 CODES AND STANDARDS

All structural design is carried out conforming to the provisions of National Building Code of India and other relevant Indian Codes and Standards.

1. I.S. 456 - 2000
2. I.S. 875 - Part I to III
3. I.S.1893 - 2016

2.0 BASIC CIVIL DESIGN LOADS

2.1 DEAD LOADS & LIVE LOADS

Typical slab dead load is calculated as follows

Self weight of slab	=	3.25kN/m²
Floor finish	=	2.0kN/m²
Live load	=	2.0kN/m²
		7.25kN/m²

C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

3.0 SOIL DETAILS

Based on soil test report Pile Foundation is adopted.

DESIGN METHODS

General design and detailing of concrete members/elements are done conforming to the provisions of I.S: 456 and other relevant I.S codes. Limit State method is followed for the design.

Seismic Zone III load is taken into account for the analysis. The predominant direction of vibration is horizontal. Relevant combination of forces has been taken into account.

4.1

Load Combination	Ultimate Limit Load	Serviceability Limit State
DL+LL+WL Or DL+LL+EL	1.2DL+1.2LL+1.2WL Or 1.2DL+1.2LL+1.2EL	DL+LL+WL or DL+LL+EL

4.3 **MINIMUM COVER**

Slab	15 mm
Beam	25 mm
Columns	40 mm
Foundations	50 mm

The Structure is safe and sound when used for the purpose for which it is designed.

C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

```
**************************************************
*                                                *
*          STAAD.Pro CONNECT Edition             *
*          Version  22.12.00.142                 *
*          Proprietary Program of                *
*          Bentley Systems, Inc.                 *
*          Date=    NOV  5, 2024                 *
*          Time=    14:45: 5                     *
*                                                *
*  Licensed to: C.Kannan                         *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: D:\AGAN\4.STABILITY\KCEE - 21 RAMACHANDRA IYER STREET\Staad.. .STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 11/5/2024
     4. JOB NAME PROPOSED RESIDENTIAL BUILDING AT NO:21, RAMACHANDRA IYER STREET, -
     5. T.NAGAR, CHENNAI.
     6. ENGINEER NAME KANNAN
     7. CHECKER NAME KANNAN
     8. CHECKER DATE 11/5/2024
     9. APPROVED DATE 11/5/2024
    10. END JOB INFORMATION
    11. INPUT WIDTH 79
    12. SET NL 250
    13. UNIT INCHES KN
    14. JOINT COORDINATES
    15. 65 0 0 0; 124 286.504 0 0; 125 0 118.11 0; 126 166.503 118.11 0
    16. 127 286.504 118.11 0; 128 351.004 118.11 0; 189 0 236.22 0
    17. 190 166.503 236.22 0; 191 286.504 236.22 0; 192 351.004 236.22 0
    18. 239 0 354.331 0; 240 166.503 354.331 0; 241 286.504 354.331 0
    19. 242 351.004 354.331 0; 349 0 -78.7402 0; 365 286.504 -78.7402 0
    20. 427 0 708.662 0; 439 286.504 708.662 0; 444 0 472.441 0; 445 166.503 472.441 0
    21. 446 286.504 472.441 0; 447 351.004 472.441 0; 494 0 590.551 0
    22. 495 166.503 590.551 0; 496 286.504 590.551 0; 497 351.004 590.551 0
    23. 544 166.503 708.661 0; 545 351.004 708.661 0; 581 166.503 0 0
    24. 583 166.503 -78.7402 0
    25. MEMBER INCIDENCES
    26. 87 65 581; 174 125 126; 175 126 127; 257 127 128; 278 189 190; 279 190 191
    27. 347 191 192; 358 239 240; 359 240 241; 425 241 242; 514 349 65; 530 365 124
    28. 531 65 125; 532 125 189; 533 189 239; 586 124 127; 587 127 191; 588 191 241
    29. 713 444 445; 714 445 446; 780 446 447; 785 239 444; 797 241 446; 802 494 495
    30. 803 495 496; 869 496 497; 874 444 494; 886 446 496; 891 427 544; 892 544 439
    31. 958 439 545; 963 494 427; 975 496 439; 998 581 124; 1000 583 581; 1002 581 126
    32. 1003 126 190; 1004 190 240; 1005 240 445; 1006 445 495; 1007 495 544
    33. SUPPORTS
    34. 349 365 583 FIXED
    35. UNIT METER KN
    36. DEFINE MATERIAL START
    37. ISOTROPIC CONCRETE
    38. E 2.17185E+07
```

C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

```
 39. POISSON 0.17
 40. DENSITY 23.5616
 41. ALPHA 1E-05
 42. DAMP 0.05
 43. G 9.28139E+06
 44. TYPE CONCRETE
 45. STRENGTH FCU 27579
 46. END DEFINE MATERIAL
 47. MEMBER PROPERTY
 48. 514 530 TO 533 586 TO 588 785 797 874 886 963 975 1000 1002 TO 1006 -
 49. 1007 PRIS YD 0.45 ZD 0.23
 50. 87 174 175 257 278 279 347 358 359 425 713 714 780 802 803 869 891 892 958 -
 51. 998 PRIS YD 0.45 ZD 0.23
 52. CONSTANTS
 53. MATERIAL CONCRETE ALL
 54. DEFINE IS1893 2016 LOAD
 55. ZONE 0.16 RF 5 I 1.2 SS 1 ST 1 DM 0.05 DT 2
 56. MEMBER WEIGHT
 57. 87 174 175 257 278 279 347 358 359 425 713 714 780 802 803 869 891 892 958 -
 58. 998 UNI 12 0 0
 59. 87 174 175 257 278 279 347 358 359 425 713 714 780 802 803 869 891 892 958 -
 60. 998 UNI 25 0 0
 61. DEFINE WIND LOAD

*** NOTE: If any floor diaphragm is present in the model Wind Load definition
          should be defined after Floor Diaphragm definition. Otherwise wind
          load generation may be unsuccessful during analysis.

 62. TYPE 1 WIND 1
 63. <! STAAD PRO GENERATED DATA DO NOT MODIFY !!!
 64. CUSTOM:PARAMS
 65. !> END GENERATED DATA BLOCK
 66. INT 1.22 1.35 1.48 HEIG  10  15  18
 67. EXP 1 JOINT 65 124 TO 128 189 TO 192 239 TO 242 349 365 427 439 444 TO 447 -
 68. 494 TO 497 544 545 581 583
 69. LOAD 1 LOADTYPE SEISMIC-H  TITLE EQX
 70. 1893 LOAD X 1
 71. LOAD 2 LOADTYPE SEISMIC-H  TITLE EQX
 72. 1893 LOAD X -1.
 73. LOAD 3 LOADTYPE SEISMIC-V  TITLE EQZ
 74. 1893 LOAD Z 1
 75. LOAD 4 LOADTYPE SEISMIC-V  TITLE EQZ
 76. 1893 LOAD Z -1.
 77. LOAD 5 LOADTYPE WIND  TITLE WIND +X
```

```
  78. WIND LOAD X 1 TYPE 1
*WARNING- NO MEMBERS LOADED FOR A WIND LOAD GENERATION.
  79. LOAD 6 LOADTYPE WIND  TITLE WIND -X
  80. WIND LOAD -X 1 TYPE 1
*WARNING- NO MEMBERS LOADED FOR A WIND LOAD GENERATION.
  81. LOAD 7 LOADTYPE WIND  TITLE WIND +Z
  82. WIND LOAD Z 1 TYPE 1
  83. LOAD 8 LOADTYPE WIND  TITLE WIND -Z
  84. WIND LOAD -Z 1 TYPE 1
  85. LOAD 9 LOADTYPE LIVE  TITLE L.L
  86. MEMBER LOAD
  87. 87 174 175 257 278 279 347 358 359 425 713 714 780 802 803 869 891 892 958 -
  88. 998 UNI GY -12
  89. LOAD 10 LOADTYPE DEAD  TITLE D.L.
  90. SELFWEIGHT Y -1 LIST ALL
  91. MEMBER LOAD
  92. 87 174 175 257 278 279 347 358 359 425 713 714 780 802 803 869 891 892 958 -
  93. 998 UNI GY -25
  94. LOAD COMB 11 1.5(DL+IL)
  95. 9 1.5 10 1.5
  96. LOAD COMB 12 1.2(DL+IL+ELX)
  97. 9 1.5 10 1.2 1 1.2
  98. LOAD COMB 13 1.2(DL+IL-ELX)
  99. 9 1.2 10 1.2 2 1.2
 100. LOAD COMB 14 1.2(DL+IL+ELZ)
 101. 9 1.2 10 1.2 3 1.2
 102. LOAD COMB 15 1.2(DL+IL-ELZ)
 103. 9 1.2 10 1.2 4 1.2
 104. LOAD COMB 16 1.2(DL+IL+WLX)
 105. 9 1.2 10 1.2 5 1.2
 106. LOAD COMB 17 1.2(DL+IL-WLX)
 107. 10 1.2 6 1.2
 108. LOAD COMB 18 1.2(DL+IL+WLZ)
 109. 9 1.2 10 1.2 7 1.2
 110. LOAD COMB 19 1.2(DL+IL-WLZ)
 111. 9 1.2 10 1.2 8 1.2
 112. LOAD COMB 20 1.5(DL+ELX)
 113. 9 1.5 10 1.5 1 1.5
 114. LOAD COMB 21 1.5(DL-ELX)
 115. 9 1.5 10 1.5 2 1.5
 116. LOAD COMB 22 1.5(DL+ELZ)
 117. 9 1.5 10 1.5 3 1.5
 118. LOAD COMB 23 1.5(DL-ELZ)
 119. 10 1.5 4 1.5
```

```
120. LOAD COMB 24 1.5(DL+WLX)
121. 10 1.5 5 1.5
122. LOAD COMB 25 1.5(DL-WLX)
123. 10 1.5 6 1.5
124. LOAD COMB 26 1.5(DL+WLZ)
125. 10 1.5 7 1.5
126. LOAD COMB 27 1.5(DL-WLZ)
127. 10 1.5 8 1.5
128. LOAD COMB 28 0.9 DL+ELX
129. 10 0.9 1 1.5
130. LOAD COMB 29 0.9 DL-ELX
131. 10 0.9 2 1.5
132. LOAD COMB 30 0.9 DL+ELZ
133. 10 0.9 3 1.5
134. LOAD COMB 31 0.9 DL-ELZ
135. 10 0.9 4 1.5
136. LOAD COMB 32 0.9 DL+WLX
137. 10 0.9 5 1.5
138. LOAD COMB 33 0.9 DL-WLX
139. 10 0.9 6 1.5
140. LOAD COMB 34 0.9 DL+WLZ
141. 10 0.9 7 1.5
142. LOAD COMB 35 0.9 DL-WLZ
143. 10 0.9 8 1.5
144. PERFORM ANALYSIS PRINT ALL


         P R O B L E M   S T A T I S T I C S
         -----------------------------------

  NUMBER OF JOINTS          30  NUMBER OF MEMBERS       41
  NUMBER OF PLATES           0  NUMBER OF SOLIDS         0
  NUMBER OF SURFACES         0  NUMBER OF SUPPORTS       3


        Using 64-bit analysis engine.

        SOLVER USED IS THE IN-CORE ADVANCED MATH SOLVER

TOTAL       PRIMARY LOAD CASES =     10, TOTAL DEGREES OF FREEDOM =      162
TOTAL LOAD COMBINATION  CASES =     25  SO FAR.
```




C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

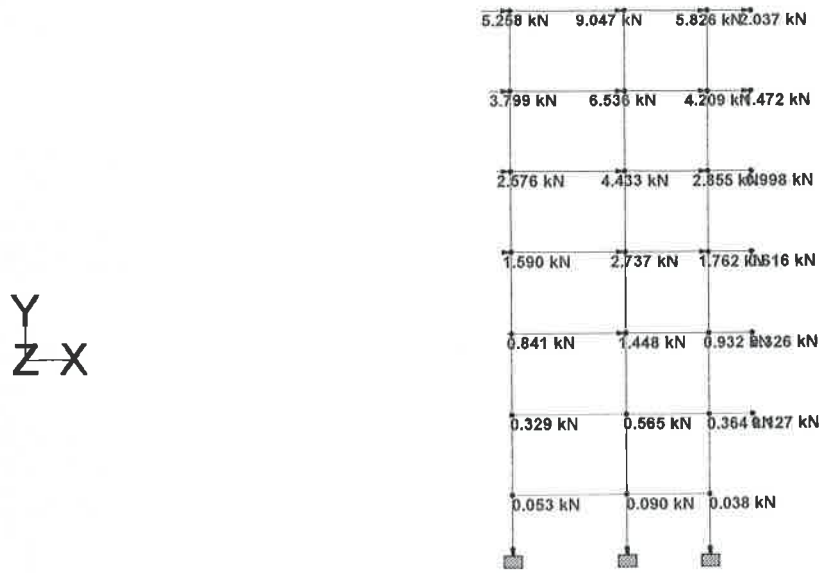


Load 1


C. KANNAN, B.E.,M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai - 600 020.

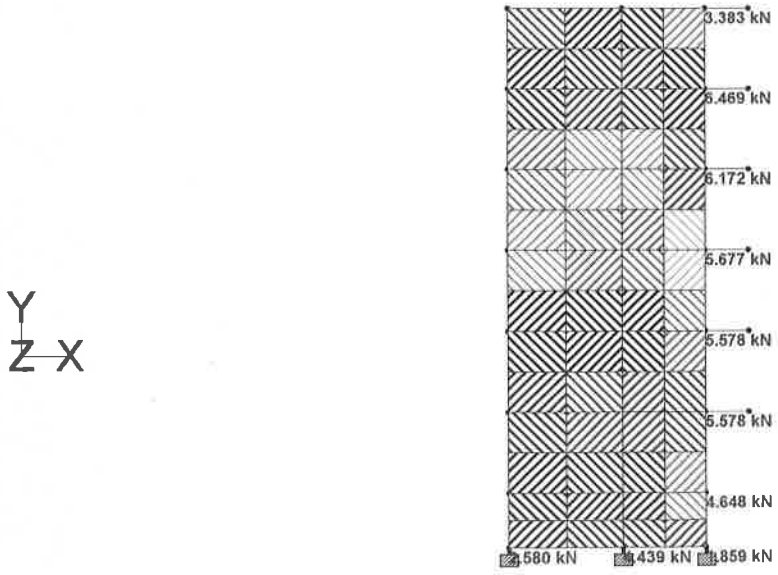
3.383 kN
6.469 kN
6.172 kN
5.677 kN
5.578 kN
5.578 kN
4.648 kN
580 kN
439 kN
859 kN
Y
Z
X

Load 7

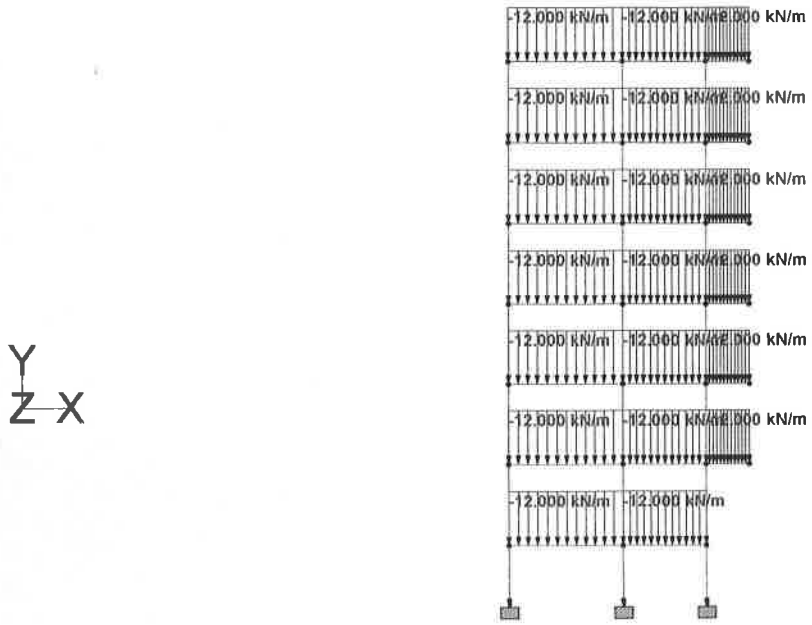

-12.000 kN/m
-12.000 kN/m
-12.000 kN/m
-12.000 kN/m
-12.000 kN/m
-12.000 kN/m
-12.000 kN/m
-12.000 kN/m
-12.000 kN/m
-12.000 kN/m
-12.000 kN/m
-12.000 kN/m
-12.000 kN/m
-12.000 kN/m
Y
Z
X


Load 9

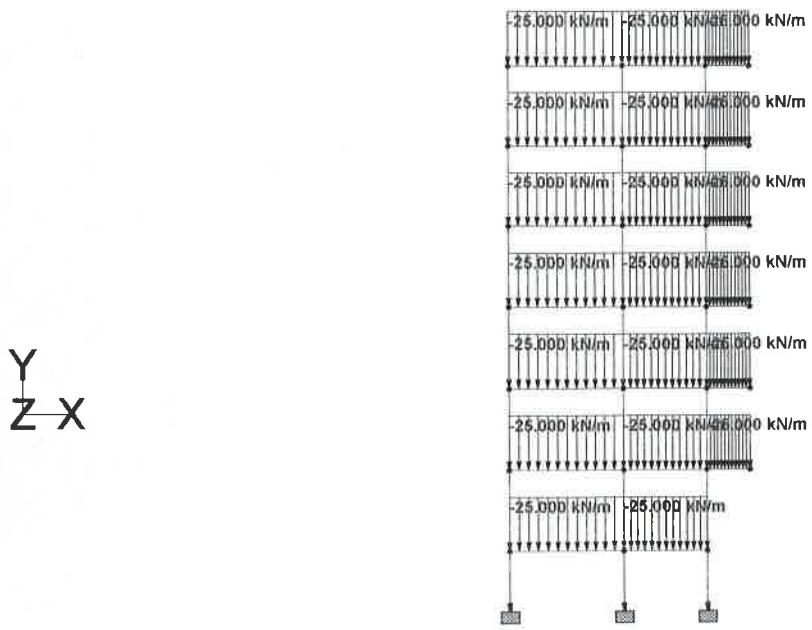


Load 10

C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai - 600 020.

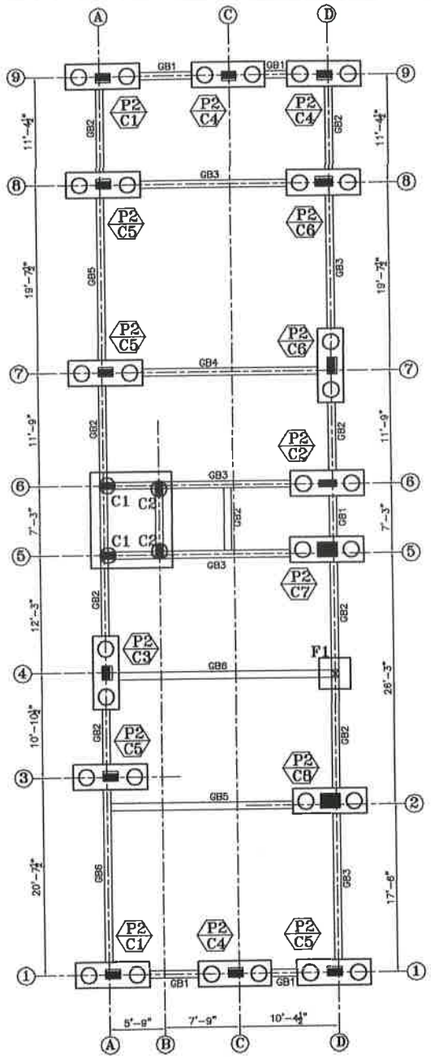





COL-C1




COL-C2




COL-C3




COL-C4




COL-C5




COL-C6




COL-C7




COL-C8




C.S OF GB1




C.S OF GB2

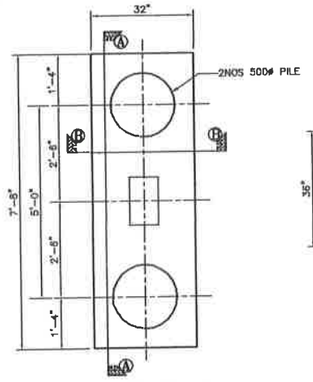


PILE-P2

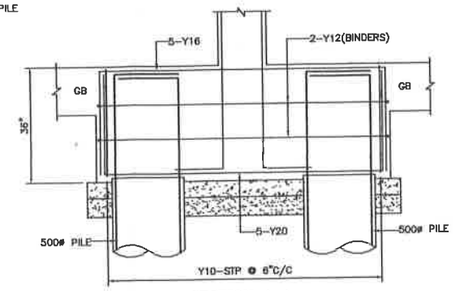


SECTION A A




SECTION B B




L.S OF GB3




C.S OF GB3




COL-F1
(SECTION A A)

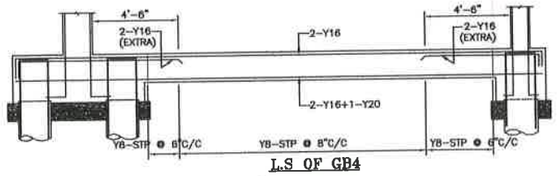


L.S OF GB4




C.S OF GB4




FOOTING-F1

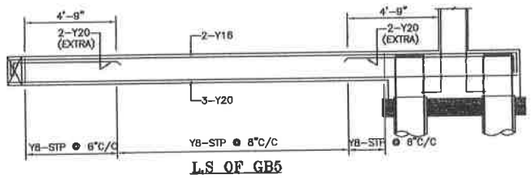


L.S OF GB5




C.S OF GB5

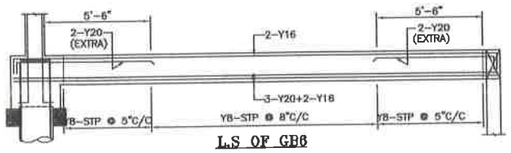


L.S OF GB6




C.S OF GB6

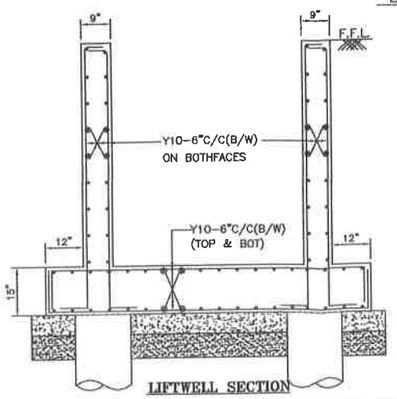


LIFTWELL SECTION

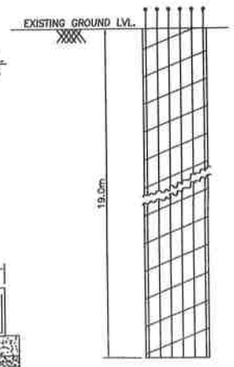

TYP. SEC. OF PILE
(BORED CAST-IN-SITU PILE)



500ø PILE

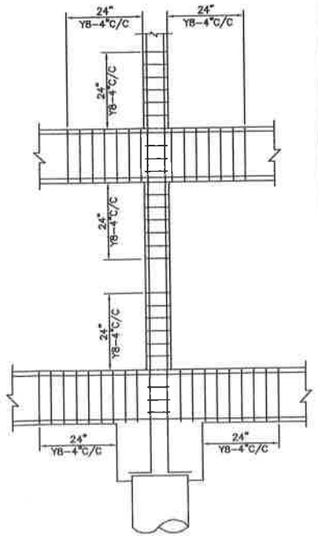

TYP. SEC. FOR
STP. DETAILS

Notes:-

1. This drawing should be read along with architectural drawings.
2. Grade of R.C.C. Items shall be M30 for column & M25 for all other R.C.C works
   Grade of pile elements shall be M30 with minimum cement content 400 kg/m3
3. Y Denotes TOR40 Steel conforming to I.S. 1786 – 1985.
   Grade – Fe 500
4. Clear cover to the main steel
   50 for Footings , Raft Slabs & Raft Beams.
   40 for Columns.
   25 for Lintel & Beams.
   20 for Sunshade & Slab.
5. Lap length shall be 50 d (Max. dia) for all bars.
6. ——— Bottom Reinforcement
7. ----- Top Reinforcement
8. Provide Continuous Chairs to keep the top Reinforcement in position
9. Provide Y 8 at 200 as Distribution steel for all top Reinforcement.
10. Spacer Bar to be Provided in Between Two Layers Of Reinforcement of Same Dia at Every 1000 C/ C.
11. Not more than 40% of Reinforcement shall be Lapped at any particular junction.
12. Cantilever props should not be released until the roof is concreted.
13. Foundation is designed for Stilt plus five upper floor only.
14. For Earthquake analysis Zone III is taken as per IS : 1893-2016 code.
15. Removal of formworks :
    I) For Slabs :
    a. Slabs spanning upto 4.5 m (15'-0") – 7 days
    b. Slabs spanning over 4.5 m (15'-0") – 14 days
    II) For Beams and Arches :
    c. Beams and Arches spanning upto 6 m (20'-0") -14days
    d. Beams and Arches spanning over 6 m (20'-0") -21days

R.NO	DATE	DESCRIPTION

PROJECT

PROPOSED RESIDENTIAL BUILDING AT NO:21, RAMACHANDRA IYER STREET, T.NAGAR, CHENNAI., FOR M/s. KCee PROPERTIES

FOUNDATION DETAIL


DESIGNED	KANNAN	SCALE	1 : 100
DRAWN	VINAYAGAM	DATE	05-11-2024

STRUCTURAL CONSULTANTS:


C. KANNAN, B.E., M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

C.KANNAN B.E., M.E(STRUCTURE)
DOOR NO:21, PLOT NO:267-W,
FLAT NO:2B, "UTOPIA APARTMENTS",
2nd FLOOR, 4th MAIN ROAD,
INDIRA NAGAR, CHENNAI-20.
MOBILE NO: 088412 49815.
E-MAIL:kannanks2007@gmail.com


FILE NAME : D/VINAYAGAM/KCEE-21 RAMACHANDRA IYER STREET

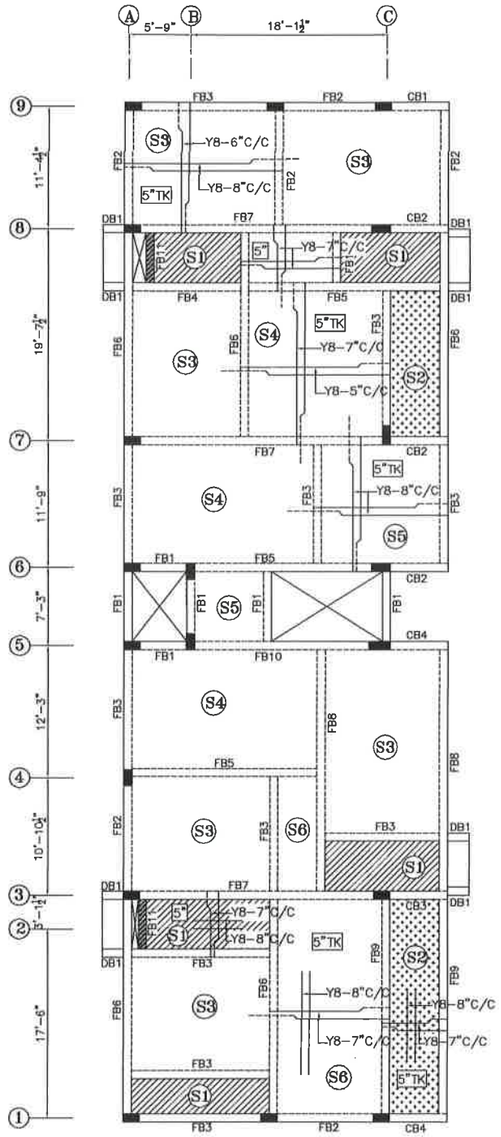


C.S OF FB1




C.S OF FB2




L.S OF FB3

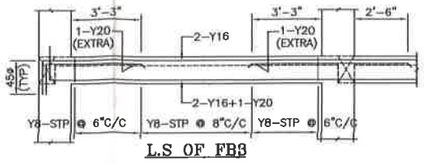

C.S OF FB3




L.S OF FB4

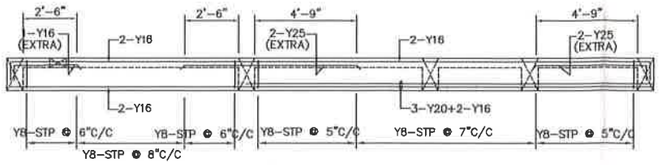


L.S OF FB5


C.S OF FB4




C.S OF FB5




L.S OF FB6

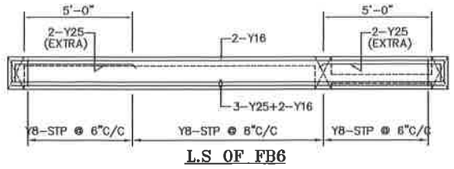


C.S OF FB6




L.S OF DB1



C.S OF DB1




L.S OF FB7

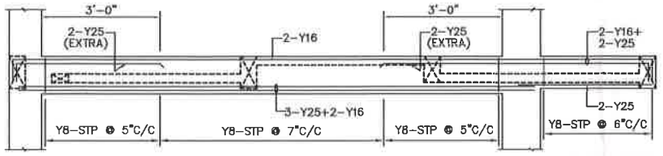


L.S OF CB2


C.S OF FB7




C.S OF CB2




L.S OF FB8

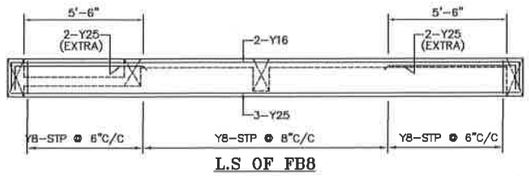


C.S OF FB8




L.S OF CB1




C.S OF CB1




C.S OF FB11




L.S OF FB9

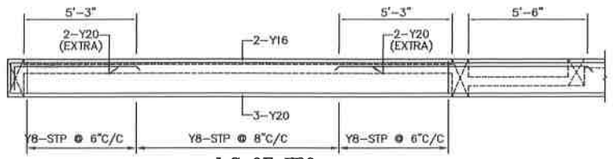


C.S OF FB9




L.S OF CB3




C.S OF CB3




TYP. SEC. FOR STP. DETAILS




L.S OF FB10

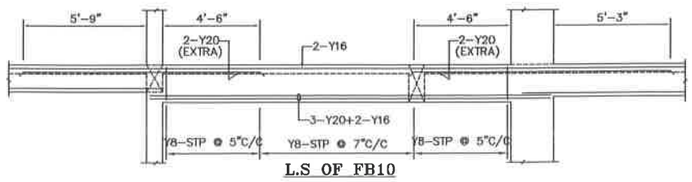


C.S OF FB10



L.S OF CB4



C.S OF CB4



Notes:-

1. This drawing should be read along with architectural drawings.
2. Grade of R.C.C. Items shall be M30 for column & M25 for all other R.C.C works
3. Y Denotes TOR40 Steel confirming to I.S. 1786 – 1985. Grade – Fe 500
4. *Clear cover to the main steel*
   - 50 for Footings , Raft Slabs & Raft Beams.
   - 40 for Columns.
   - 25 for Lintel & Beams.
   - 20 for Sunshade & Slab.
5. Lap length shall be 50 d (Max. dia) for all bars.
6. —— Bottom Reinforcement
7. ------ Top Reinforcement
8. Provide Continuous Chairs to keep the top Reinforcement in position
9. Provide Y 8 at 200 as Distribution steel for all top Reinforcement.
10. Spacer Bar to be Provided in Between Two Layers Of Reinforcement of Same Dia at Every 1000 C/ C.
11. Not more than 40% of Reinforcement shall be Lapped at any particular junction.
12. Cantilever props should not be released until the roof is concreted.
13. Foundation is designed for Stilt plus five upper floor only.
14. For Earthquake analysis Zone III is taken as per IS : 1893–2016 code.
15. Removal of formworks :
    - I) For Slabs :
      - a. Slabs spanning upto 4.5 m (15'–0") – 7 days
      - b. Slabs spanning over 4.5 m (15'–0") – 14 days
    - II) For Beams and Arches :
      - c. Beams and Arches spanning upto 6 m (20'–0") –14days
      - d. Beams and Arches spanning over 6 m (20'–0") –21days

= 10" SUNK

= 3" SUNK

R.NO	DATE	DESCRIPTION

PROJECT

PROPOSED RESIDENTIAL BUILDING AT NO:21, RAMACHANDRA IYER STREET, T.NAGAR, CHENNAI., FOR M/s. KCee PROPERTIES

TYPICAL FLOOR SLAB DETAIL

DESIGNED	KANNAN		SCALE	1 : 100
DRAWN	VINAYAGAM		DATE	18-10-2024

STRUCTURAL CONSULTANTS:

C.KANNAN, B.E.,M.E, (Structure)
Structural Engineer,
CMDA Reg. No: SE/I/2024/2/0047
Door No: 21, 4th Main Road,
Indira Nagar, Chennai-600 020.

C.KANNAN B.E., M.E(STRUCTURE)
DOOR NO:21, PLOT NO:257–W,
FLAT NO:2B, "UTOPIA APARTMENTS",
2nd FLOOR, 4th MAIN ROAD,
INDIRA NAGAR, CHENNAI–20.
MOBILE NO: 098412 49815.
E–MAIL:kannankds2007@gmail.com

FILE NAME : D/VINAYAGAM/KCEE–21 RAMACHANDRA IYER STREET



our services doesn't just end there

Buying & Selling Services

Property Buying Assistance, Property Selling Support, Market Price Analysis, Owner Outreach and Negotiation.

Legal & Documentation Services

Certified EC, Patta, legal opinions, property verification, due diligence, litigation solutions, and legal heir certificates.

Property Development & Approvals

Building plan approvals, construction, layout and sub-division approvals, zone conversion, and occupancy certification.

NRI & Investment Services

Escrow Services, Rentals, Litigation Solutions, Property Valuation and Property Management

Compliance & Special Services

Demolition, Vaasthu checks, regularization of unauthorized buildings, and office space solutions.



empowering your real estate decisions with smart tools

Property Valuation & Cost Estimation

Guideline Value, Apartment Composite Value, Stamp Duty & Registration Fees Calculator, Building Value Calculator, Capital Gains Calculator, Area Unit Converter, Length Unit Converter

Ownership, Compliance & Legal Verification

Encumbrance Certificate (EC) Search, Find Your SRO, Temple Property Check, WAQF Property Check, View Patta/Chitta, View FMB, Patta Analyzer, EC Analyzer

Zoning & Land Use Analysis

Land Use Zone Finder, CRZ Zone Check, Aquifer Zone Check, CBA Check, EWS Check, Road Width Check, Proposed Road Widening Check, FSI Calculator

Property Documentation & Workflow Tools

Forms & Templates, Document Generator, Document Translation, Dictionary

Vastu & Property Management Tools

Home Vastu Shastra, Plot Vastu Shastra, Property Management

Verified RealEstate™

We're honored to be part of your real estate journey

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996
www.verified.realestate