Verified RealEstate™

RE REGULATORY RECORD

RERA Document

The document as the regulator published it, reproduced in full behind this page.

Published for reference. The authority's own register is the operative record.

Verified RealEstate™
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India

hello@verified.realestate
+91 9996 12 9996
verified.realestate

DIGITALLY VERIFIED RECORD

FILE NO. LAYOUT-1/ 0174/2022

உள்ளாட்சி மன்றப் படி


SITE EXTENT (AS PER DOCUMENT)	:	7193 SQ.M
ROAD AREA	:	2249 SQ.M
PUBLIC PURPOSE PROVIDED (1%)	:	57 SQ.M
PP-1 HANDED OVER TO THE LOCAL BODY (0.5%) = 29.0 Sq.m		
PP-2 HANDED OVER TO THE TANGEDCO (0.5%) = 28.0 Sq.m		
NO. OF PLOTS	:	61 Nos

Planing Permit No. CMDA NO 15429/2018 b6 A3
APPROVED
Subject To The Conditions In This Office
LR. No.: 1654/25/A3
Dt. 28/01/26
N. Sankar 22.1.26.
Commissioner
Sholavaram Panchayat Union
This Planning Permission Issued As Per Delegation Of Powers Given By Member Secretary CMDA Chennai-600 008

28/1/26 22.01.26

NOTE:

1. SPLAY - 1.5M x 1.5M
2. MEASUREMENTS ARE INDICATED EXCLUDING SPLAY DIMENSIONS
3. ROAD AREA
   PUBLIC PURPOSE-1
   PUBLIC PURPOSE-2 (RESERVED FOR TANGEDCO)
   — WERE HANDED OVER TO THE LOCAL BODY VIDE GIFT DEED DOC.NO: 5665/2023, DATED: 18.04.2023 @ SRO, REDHILLS.

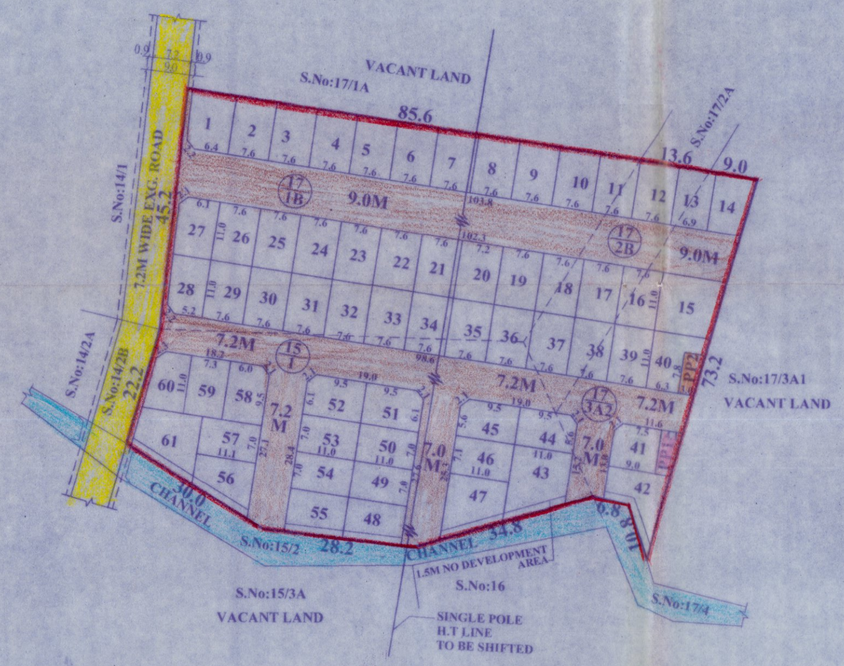

நகல் அனுப்பப்படுகிறது
(மற்றும்)
மாவட்ட வளர்ச்சி அலுவலர் (வ.நி.ப)
சோழவரம்
22/1/26

CONDITIONS:

(I)THE APPLICANT SHOULD FOLLOW THE CONDITIONS MENTIONED BY THE CE, PWD/WRD, CHENNAI REGION, CHEPAUK, CHENNAI-5 IN LETTER NO.DB/T5(3)/F- NOC 10935 ANGADU VILLAGE 01036 / 2022 / DATED 23.02.2023, WHICH ARE TO BE COMPLIED BY THE APPLICANT BEFORE ISSUING OF THE LAYOUT APPROVAL BY THE COMPETENT AUTHORITY (LOCAL BODY)

1. The applicant's land should be filled with earth filling with proper compaction to the minimum Level of (+)12.500m. [i.e. (+)0.450m above, the weir crest level of Boodur Tank is (+)12.050m] in order to protect the site from inundation during floods. The process of earth filling and compaction should be done in layers of not more than 0.30 metre depth to achieve required degree of compaction for the depth varying from 0.900m to 0.960m depending upon the existing field levels. Also, the applicants should provide emergency pumping operation for the seepage water, if it is proposed to have basement floor and as well as dewatering arrangements during flood periods.

2 The all round pavement level within the site should not be less than (+)12.500m. The applicant should prepare the layout proposal by considering the suitable internal storm water drainage network drains within the site ie, micro drains of suitable size within the site as per prevailing site conditions. The same should be connected to the local drain/channel, rainwater harvesting, roads with road side drains and sewerage treatment and its disposal and garbages/debris and other solid waste management as per norms in existence within the applicant's land according to existing rules in force and should get proper approval from competent authority without fail.

The sewage or any unhygienic drainage (Treated or Untreated) should not be let into Eri / channel / course at any cost and the debris and other materials should not be dumped into the drain /surplus course obstructing free flow of water. The applicant should make drainage network, at their own cost and the same is to be connected to natural storm water drainage / Channel. There should not be any hindrance to the free flow of internal drain to downstream

3. The necessary setback distance especially on south should be provided within the site as per site condition as per the norms in existence and as per the rules in force of CMDA (as per the circular issued by the office of the Commissioner of Town & Country Planning Chennai - 2 vide Roc No 4367/2019-BA2 / 13.03.2019) during development and there should not be any construction activities in the setback areas in further also. The CMDA should issue completion certificate only after obtaining compliance certificate NOC from WRD.

4. The applicant should clearly demarcate the boundary of his land before commencement of any developmental activities in the presence of Revenue and WRD authorities. The applicant should also maintain the measurement of the Channel earmarked in the Revenue records and should never be altered and must be maintained at all time without any encroachments and should be maintained as per Revenue records (FMB). If any damages occurred to the Channel, the same should be restored to its original condition at their own cost.

5. The permission granted to the applicant, should not be altered/modified/ changed to any others. Based on the records submitted by the applicant, the permission is granted. If any documents seem to be fake/manipulated/fabricated, in future the above permission will be cancelled without any correspondence. Hence, the applicants are solely responsible of genuinety of the documents submitted.

6. The WRD officers should be allowed to inspect the site at any time, during execution and thereafter, if necessary. Advance intimation should be given to the WRD officers concerned before commencement of work

7. The applicant should abide by the rules and regulation of the WRD from time to time. The applicant should also abide court of law of both State & Central Government from time to time.

8. The applicant should get clearance certificate for his site from the Revenue department to make sure that the site is not an encroached property from the water body as well as confirming this proposed site boundaries.

9. The Government Channel in SF Nos.15/2, 17/4 and 16/1 on Southern side and S.F. Nos 270/1, 271/1 on Western side of the applicant land should be completely desilted and resectioned by constructing retaining wall on either side of the channel with concrete bed as per the FMB upto their stretch at the applicant's own cost The bed level of the above channel should be ascertained and restored before commencing the development actions in the presence of the concerned WRD Executive Engineer, Maintenance Assistant Engineer, Junior Engineer (Maintenance) & within the stretch of applicant's land should be maintained properly without any change and without encroachments.

10. The Government channel in S.F.No. 15/2, 17/4, 16/1 on Southern side and S.F.Nos 270/1, 271/1 on Western side stretch abutting the applicant boundary should be marked as per FMB and monitored and maintained by the applicant at his own cost. The width of the channel should be maintained without encroachments as per Revenue records and the hydraulic parameters of the field channel should be maintained. The applicant should make necessary periodical arrangements for free flow of water through the existing channel to the downside area within the proposed layout site. Also, the applicant should de-silt the channel periodically, and remove the obstruction then and there without any hindrance for free flow of water at his own cost within the proposed land, after the completion of project also.

11. The applicant should not carry out any other cross masonry structures across the channels without prior permission from WRD

12. The sewage water from the applicants' land should not let into the drain and for the disposal of the sewage water, suitable arrangements should be made for the same by the applicant, and as well as the construction materials/debris/garbages should not be dumped into the Channel at any cost

At any cost, sewage / sullage should not be let into river, and the garbages debris and construction materials should not be dumped into the Channel restricting the free flow of water.

13. The application should not object at any time for the measurement work / improvement work of the channel which is proposed to be carried out by WRD. The applicant should give an undertaking in writing to the effect that the above proposal will not obstruct in case any maintenance / improvement / development Works as per Revenue records (FMB), which are proposed to be carried out by WRD in future periodically.

14. WRD is giving opinion only in connection with the inundation aspect and does not deliver any rights to the applicant to encroach the WRD / Government Lands / river. The NOC for his site from the WRD is purely issued on the basis of inundation point of view.

The owner of the document received from the applicant in respect to the ownership is purely of applicant's responsibility and it is only for reference purpose to this department. The legal validity of this document should be verified by the Development / Revenue authorities. The specific remarks on inundation are purely issued on technical grounds in respect to the physical location of land

Failing to comply with any of the above conditions, WRD reserves rights to withdraw the Technical opinion on inundation point of view to the above proposed site and in event, the applicant shall not be eligible for any compensation whatsoever and as well as legal entity.

(II) TNCDBR-2019 RULE NO. 47 (8) & AMENDMENTS APPROVED IN G.O.Ms.No.16, MAWS (MA1) DEPARTMENT DATED 31.1.2020 AND PUBLISHED IN TNGG ISSUE No.41 DATED 31.01.2020.

ONE PERCENT OF LAYOUT AREA EXCLUDING ROAD, ADDITIONALLY, SHALL BE RESERVED FOR "PUBLIC PURPOSE". WITHIN THE ABOVE CEILING 0.5% OF AREA SHALL BE TRANSFERRED TO THE LOCAL BODY AND 0.5% OF AREA SHALL BE TRANSFERRED TO THE TANGEDCO OR TO THE LOCAL BODY FREE OF COST THROUGH A REGISTERED GIFT DEED BEOFRE THE ACTUAL SANCTION OF THE LAYOUT.

(III) TNCDBR-2019, RULE NO. 47 (11)

THE COST OF LAYING IMPROVEMENTS TO THE SYSTEMS IN RESPECT OF ROAD, WATER SUPPLY, SEWERAGE, DRAINAGE OR ELECTRIC POWER SUPPLY THAT MAY BE REQUIRED AS ASSESSED BY THE CONCERNED AUTHORITY, NAMELY, THE LOCAL BODY AND TAMIL NADU ELECTRICITY BOARD, SHALL BE BORNE BY THE APPLICANT.

(IV) LOCAL BODY SHOULD ENSURE COMPLIANCE OF ALL THE CONDITIONS STIPULATED BY PWD IN THEIR LETTER NO.DB/T5(3)/F- NOC 10935 ANGADU VILLAGE 01036 / 2022 / DATED 23.02.2023, AND SHALL OBTAIN A LETTER FROM PWD CONFIRMING THE COMPLIANCE OF THE CONDITIONS BEFORE THE SANCTION AND RELEASE OF THE LAYOUT.

(V) THE APPLICANT IS RESPONSIBLE FOR THE SHAPE,SIZE & DIMENSIONS OF THE SITE UNDER REFERENCE.

⊛ NECESSARY SPACE FOR BUILDING LINE TO BE LEFT AS PER THE RULE IN FORCE WHILE TAKING UP DEVELOPMENT

LEGEND:

- SITE BOUNDARY
- ROADS GIFTED TO LOCAL BODY
- EXISTING ROAD
- PUBLIC PURPOSE -1 GIFTED TO LOCAL BODY
- PUBLIC PURPOSE -2 GIFTED TO TANGEDCO
- CHANNEL

This Planning Permission Issued under New Rule TNCDBR, 2019 is subject to final outcome of the W.P.(MD) No.8948 of 2019 and WMP (MD) Nos. 6912 & 6913 of 2019.

OWNER SINGNATURE

I. ARIVAZHAKAN RAJ, D.C.E.,
Registered Engineer Grade-III
Registration No. RE/GR-III/19/04/107
Chennai Metropolitan Development Authority
Off: SAI GREEN ASSOCIATES
239/3, Rohini Flats, J.N. Road,
Anna Nagar (W) Extn., Chennai-600 101.
Ph: 044-48606014, Mobile: 7299989915

LICENSED SURVEYOR

CONDITIONS :
THE LAYOUT APPROVED IS VALID SUBJECT TO OBTAINING SANCTION FROM THE LOCAL BODY CONCERNED

Planning Permit No. 15429 Dated: 24/4/23
P.P.D / L.O No: 115/2023
APPROVED
VIDE LETTER No.: Layout-I/0174/2022
DATED : 20/09/2022
For Member Secretary
Chennai Metropolitan Development Authority
Chennai-600 008.

SHOLAVARAM PANCHAYAT UNION

LAYOUT OF HOUSE SITES IN S.Nos.15/1, 17/1B, 2B AND 17/3A2 OF ANGADU VILLAGE.

SCALE : 1:800 (ALL MEASUREMENTS ARE IN METRE.)

THE LANDLENS SUITE

Eight ways to know a piece of land before you pay for it.

This report covers one part of the picture. These cover the rest, drawn from the same government records, for any property in Tamil Nadu.

LandLens One
Ask anything about a property and get an answer grounded in live government records, with the sources shown.
/landlens/one

Verify My Land
Every record check run on one property and returned as a single report.
/landlens/verify-my-land

Legal Opinion
An advocate's written opinion on the title, built on the records we pull for it.
/landlens

One Map
Every layer on one map: the parcel, its boundary, zoning, water bodies and what sits around it.
/landlens/one/map

PriceMap
What land actually changed hands for around this plot, taken from the registered deeds.
/landlens/pricemap

Build Scope
What you are allowed to build here: floor space, height, coverage and setbacks.
/landlens/build-scope

Property Tracker
Watch a property and hear about it when something new is registered against it.
/landlens/property-tracker

Deal Room
Run the transaction in one place: documents, stamping, signatures and the parties.
/landlens/deal-room

FREE TOOLS · NO ACCOUNT NEEDED

Twenty-four checks you can run yourself, at no cost.

Records and verification

The registers themselves, read for you.

- Encumbrance Certificate
- Patta and Chitta
- Field Measurement Sketch
- EC Analyzer
- Bank charge check
- Court case search
- Seller background check
- Approval check by survey

Value and duty

What it is worth and what it costs to register.

- Guideline value by street
- Guideline value by survey
- Stamp duty and registration fees
- Capital gains
- Floor space index
- Area unit converter

Zoning and land use

What the plan says can happen on this land.

- Land use zone finder
- CMDA land use check
- Coastal regulation zone
- Master plan check
- Water bodies finder
- Airport height clearance

Registers and directories

Who holds it, and which office keeps the record.

- Find your registering office
- Temple property check
- Waqf property check
- RERA register

Every free tool
/tools

Services we run for you
/services

The LandLens suite
/landlens/one

Verified RealEstate™

Every claim in this document traces back to a government record.

- Legal opinions, due diligence and title verification
- Building plan, layout and sub-division approvals
- Completion and occupancy certificates, regularisation
- Escrow, negotiation and NRI property management
- Land survey, soil testing, architecture and construction

Verified RealEstate
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India
hello@verified.realestate
+91 9996 12 9996

Prepared from the registers named on the page each finding sits on. Where a register could not be read, this document says so in its place rather than leaving the gap to be read as a clean result.