Verified RealEstate™

RE REGULATORY RECORD

RERA Document


The document as the regulator published it, reproduced in full behind this page.

Published for reference. The authority's own register is the operative record.

Verified RealEstate™
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India

hello@verified.realestate
+91 9996 12 9996
verified.realestate

FILE NO.L1-0207-2025

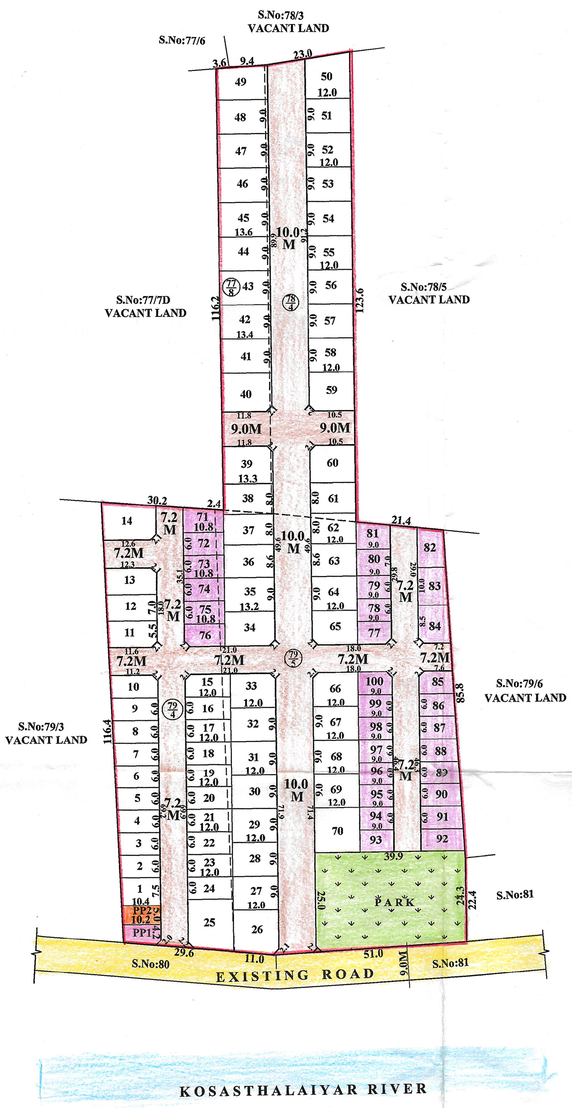

TOTAL EXTENT (AS PER DOCUMENT)	:	**14690 SQ.M**
ROAD AREA (32%)	:	**4647 SQ.M**
PLOTTABLE AREA (68%)	:	**10043 SQ.M**
10% OSR REQUIRED	:	**1004 SQ.M**
OSR PROVIDED	:	**1015 SQ.M**
1%PUBLIC PURPOSE REQUIRED	:	**100 SQ.M**
PUBLIC PURPOSE PROVIDED (PUBLIC PURPOSE AREA-1 : 52.0 SQ.M) (PUBLIC PURPOSE AREA-2 : 52.0 SQ.M)	:	**104 SQ.M**
10% E.W.S. REQUIRED	:	**1004 SQ.M**
E.W.S. PROVIDED	:	**1836 SQ.M**
REGULAR PLOTS (1 TO 70)	:	**70 Nos.**
E.W.S.PLOTS (71 TO 100)	:	**30 Nos.**
TOTAL No.OF.PLOTS	:	**100 Nos.**

NOTE :

1. SPLAY - 1.5M X 1.5M
2. MEASUREMENTS ARE INDICATED EXCLUDING SPLAY DIMENSIONS
3. ROAD AREA, PARK AREA, PUBLIC PURPOSE AREA - 1, PUBLIC PURPOSE AREA - 2 — TO REFER FINAL LETTER

மிஞ்சூர் சிறப்புநிலை பேரூராட்சி
நிருவாகவசதிற்காக மாவட்டம்
ந.க.எண்.457/2025/அ2 நாள் : 4/9/2026
திருவள்ளூர் மாவட்டம் மிஞ்சூர் சிறப்புநிலை பேரூராட்சிக்குட்பட்ட மீஞ்சூர் வருவாய் கிராமம் சர்வே எண்..... 77/8, 78/4, 79/4, 79/5 இல்
விண்ணப்பித்த மனை மீது மனுதாரர் (Regular) குடியிருப்பு மனைகள்..... EWS மனைகள் மற்றும்..... வணிக உபயோக மனைகளாக உட்பிரிவு செய்து பொதுப் சாலைகளுக்காக .....சதுர மீ. இடமும், பூங்கா பராமரிப்பிற்காக.....சதுர மீ. இடமும் பொது பயன்பாட்டிற்காக சதுர மீ.....இடமும் பேரூராட்சிக்கு தானமாக அளித்ததின் பேரில் சென்னை பெருநகர வளர்ச்சி குழும உறுப்பினர் செயலர் அவர்களின் கடித எண்..... மனைப்பிரிவு அனுமதி அளிக்கப்பட்டுள்ளதைத் தொடர்ந்து சென்னை பெருநகர வளர்ச்சி குழுமம் மற்றும் பேரூராட்சி நிர்வாகத்தினரால் மனைப்பிரிவு ஒப்புதல் வழங்கப்படுகிறது.

செயல் அலுவலர்
மிஞ்சூர் சிறப்புநிலை பேரூராட்சி
திருவள்ளூர் மாவட்டம்

CONDITIONS:

(I)THE FOLLOWING CONDITIONS OF PWD VIDE CE, WRD, CHENNAI REGION, CHEPAUK, CHENNAI-5, LETTERNO.DB/T5(3)/F-NOC.10746 MINJUR VILLAGE 5788 / 2025 / DATED:31.07.2025, ARE TO BE COMPLIED BY THE APPLICANT BEFORE SANCTION OF THE LAYOUT.

1. The applicants' land should be filled with earth filling with proper compaction to minimum level of (+)10.010m (i e)5.270m is above the Full Tank Level (FTL) of Vallur Anicut (+)4.740m to protect the site from inundation during floods. The process of earth filling and compaction should be done in layers of not more than 0.30 achieve required degree of compaction for the depth varies from 1.960m to 2.300m depending upon the existing field levels. Also, the applicants should pro pumping operation for the seepage water, if it is proposed to have base as well as de watering arrangements during flood periods. The all round within the site should not be less than (+)10.010m and the regular habitation should not be below MFL.
2. The applicants should clearly demarcate boundary of their commencement of any developmental activities in the presence of R body and WRD authorities concerned without fail and should not Government land and the same should be maintained as it is in the Revenue records.
3. The permission granted to the applicants, should not be altered / modified/changed to any others. Based on the records submitted by the applicants, the granted. If any documents seem to be fake / manipulated / fabricated, above permission will be cancelled without any correspondence. Hence, t are solely responsible of genuinety of the documents submitted.
4. The WRD officers should be allowed to inspect the site at any time, during execution and thereafter, if necessary. Advance intimation should be given to the concerned before commencement of work.
5. The applicants should abide by the rules and regulation of the WRD time. The applicants should also abide court of law of both State & Central from time to time.
6. WRD is giving opinion only in connection with the inundation aspect ar deliver any rights to the applicants to encroach the WRD / Government La The NOC for this site from the WRD is purely issued on the basis of inundation point of view.
7. The applicants should not object at any time for the maintanance works/improvement works of the Channel which is proposed to be carried out by applicant should give an undertaking in writing to the effect that the above pre not obstruct in case any maintenance/improvement/development works Revenue records [FMB], which are proposed to be carried out by WRD periodically.

TECHNICAL SUGGESTION

(a). The applicants should prepare the layout proposal by considering the Micro drain of suitable size within the site as per prevailing site conditions. The same should be connected to the local drain/channel rainwater harvesting reads with road side drain and sewerage treatment and as disposal and gartrages/debris and other solid waste management as per norms in existence within the applicants land according to existing rules in force and should get proper approval from competent authority without fail

The sewage or any unhygienic drainage (Treated or Untreated) should not be let into drain/channel/course at any cost and the debris and other materials should not be dumped into the drain/surplus course obstructing free flow of water. The applicants should make drainage network, at their own cost and the same is to be connected to natural storm water drainage/channel. There should not be any hindrance to the tree flow of internal drain to downstream

(b) The applicant should provide necessary setback distance within the site as per site condition as per the norms in existence and as per the rules in force of CMDA (as per the circular issued by the office of the Commissioner of Town & Country Planning, Chennai-2 vide Roc. No 4387/2019/BA2/Dated 13.03.2019) during development and there should not be any construction activities in the setback areas in future also The CMDA should issue completion certificate only after obtaining completion certificate NOC from WRD.

(c). The applicants should get clearance certificate for this site from the Revenue department to make sure that the site is not an encroached property from the water body as well as confirming this proposed site boundaries.

(d) The sewage water from the applicants' land should not let into the drain and for the disposal of the sewage water, suitable arrangements should be made for the same by the applicants, and as well as the construction materials/debris/garbage's should not be dumped into the River/Eri/Channel/Pond at any cost.

At any cost, sewage/sullage should not be let into River/Eri/Channel/Pond, and the garbage's/debris and construction materials should not be dumped into the River/Eri/Channel/Pond restricting the free flow of water.

The owner of the document received from the applicants in respect to the ownership is purely of applicants' responsibility and it is only for reference purpose to this department The legal validity of this document should be verified by the Development/ Revenue authorities. The specific remarks on inundation are purely issued on technical grounds in respect to the physical location of land.

Failing to comply with any of the above conditions. WRD reserves rights to withdraw the Technical opinion on inundation point of view to the above proposed site and in event, the applicants shall not be eligible for any compensation whatsoever and as well as legal entity.

(II) TNCDBR-2019 RULE NO: 47 (8) IN G.O.(Ms) No.18, MAWS DEPARTMENT DATED 04.02.2019 & AMENDMENTS APPROVED IN G.O.Ms.No.16, MAWS (MAI) DEPARTMENT DATED 31.01.2020 AND PUBLISHED IN TNGG ISSUE No.41.DATED 31.01.2020

ONE PERCENT OF LAYOUT AREA EXCLUDING ROAD, ADDITIONALLY, SHALL BE RESERVED FOR "PUBLIC PURPOSE". WITHIN THE ABOVE CEILING 0.5% OF AREA SHALL BE TRANSFERRED TO THE LOCAL BODY AND 0.5% OF AREA SHALL BE TRANSFERRED TO THE TANGEDCO OR TO THE LOCAL BODY FREE OF COST THROUGH A REGISTERED GIFT DEED BEFORE THE ACTUAL SANCTION OF THE LAYOUT

(III)TNCDBR-2019, RULE NO : 47 (9) IN G.O(Ms) No.18,MAWS DEPARTMENT DATED:04.02.2019 & AMENDMENTS APPROVED IN G.O.Ms.No.16,MAWS (MA1 DEPARTMENT DATED 31.1.2020 AND PUBLISHED IN TNGG ISSUE No.41 DATED:31.01.2020.

THE OWNER OR DEVELOPER OR PROMOTER SHALL SELL THE EWS PLOTS ONLY FOR EWS PURPOSE. AMALGAMATION SHALL BE PERMISSIBLE IN THOSE CASES OF ECONOMICALLY WEAKER SECTION PLOTS, AFTER A PERIOD OF THREE YEARS. IN SUCH CASES OF AMALGAMATION, THE PLANNING PARAMETERS FOR ECONOMICALLY WEAKER SECTION AREAS SHALL NOT APPLY.

(IV) TNCDBR-2019, RULE NO: 47 (11)

THE COST OF LAYING IMPROVEMENTS TO THE SYSTEMS IN RESPECT OF ROAD, WATER SUPPLY, SEWERAGE, DRAINAGE OR ELECTRIC POWER SUPPLY THAT MAY BE REQUIRED AS ASSESSED BY THE CONCERNED AUTHORITY, NAMELY, THE LOCAL BODY AND TAMIL NADU ELECTRICITY BOARD, SHALL BE BORNE BY THE APPLICANT.

(V) LOCAL BODY SHOULD ENSURE COMPLIANCE OF ALL THE CONDITIONS STIPULATED BY PWD IN THEIR LETTER NO. DB/T5(3)/F.NOC.10746 MINJUR VILLAGE 5788/2025 /DATED:31.07.2025, AND SHALL OBTAIN A LETTER FROM PWD CONFIRMING THE COMPLIANCE OF THE CONDITIONS BEFORE THE SANCTION AND RELEASE OF THE LAYOUT.

(VI) THE APPLICANT IS RESPONSIBLE FOR THE SHAPE,SIZE & DIMENSIONS OF THE SITE UNDER REFERENCE.

◎ NECESSARY SPACE FOR BUILDING LINE TO BE LEFT AS PER THE RULE IN FORCE WHILE TAKING UP DEVELOPMENT IN EVERY PLOT.

LEGEND:
SITE BOUNDARY
PROPOSED ROAD
EXISTING ROAD
PARK
PUBLIC PURPOSE -1
PUBLIC PURPOSE - 2
EWS
RIVER

APPROVAL CONDITION
THE LAYOUT/SUB-DIVISION APPROVAL IS VALID SUBJECT TO OBTAINING SANCTION FROM THE LOCAL BODY CONCERNED

MINJUR TOWN PANCHAYAT

LAYOUT OF HOUSE SITES IN S.Nos: 77/8, 78/4, 79/4 & 79/5 OF MINJUR VILLAGE

SCALE : 1:800 (ALL MEASUREMENTS ARE IN METRE.)

SCALE 1:800

CHENNAI METROPOLITAN DEVELOPMENT AUTHORITY

SUBJECT TO THE CONDITIONS MENTIONED IN THIS OFFICE

Signature valid
Approved by
Name & Designation : S. Balamurugan
Authority Name : Chennai Metropolitan Development Authority
Office Name : CHENNAI METROPOLITAN DEVELOPMENT AUTHORITY
Approval Date : 31/07/2025 10:43:57 PM
Remarks : (No Data)

For (Deputy Planner / Chief Planner / Member-Secretary)
Layout Division.

QR CODE

This Planning Permission issued under New Rule TNCDBR, 2019 is subject to final outcome of the W.P. (MD) No.8048 of 2019 and WMP (MD) Nos. 6912 & 6913 of 2019.

Signature valid
Digitally Signed by:-
Registered Engineer Grade II: SRI VIKRAM
Sign Date: 09/08/2025 10:24:32 AM

Applicants (Owner / Developer / Power of Attorney)

ISO_A1_(841.00_x_594.00_MM)

This is a system generated drawing as per the soft copy submitted by the Architect/ License Engineer

THE LANDLENS SUITE

Eight ways to know a piece of land before you pay for it.

This report covers one part of the picture. These cover the rest, drawn from the same government records, for any property in Tamil Nadu.

LandLens One
Ask anything about a property and get an answer grounded in live government records, with the sources shown.
/landlens/one

Verify My Land
Every record check run on one property and returned as a single report.
/landlens/verify-my-land

Legal Opinion
An advocate's written opinion on the title, built on the records we pull for it.
/landlens

One Map
Every layer on one map: the parcel, its boundary, zoning, water bodies and what sits around it.
/landlens/one/map

PriceMap
What land actually changed hands for around this plot, taken from the registered deeds.
/landlens/pricemap

Build Scope
What you are allowed to build here: floor space, height, coverage and setbacks.
/landlens/build-scope

Property Tracker
Watch a property and hear about it when something new is registered against it.
/landlens/property-tracker

Deal Room
Run the transaction in one place: documents, stamping, signatures and the parties.
/landlens/deal-room

FREE TOOLS · NO ACCOUNT NEEDED

Twenty-four checks you can run yourself, at no cost.

Records and verification

The registers themselves, read for you.

- Encumbrance Certificate
- Patta and Chitta
- Field Measurement Sketch
- EC Analyzer
- Bank charge check
- Court case search
- Seller background check
- Approval check by survey

Value and duty

What it is worth and what it costs to register.

- Guideline value by street
- Guideline value by survey
- Stamp duty and registration fees
- Capital gains
- Floor space index
- Area unit converter

Zoning and land use

What the plan says can happen on this land.

- Land use zone finder
- CMDA land use check
- Coastal regulation zone
- Master plan check
- Water bodies finder
- Airport height clearance

Registers and directories

Who holds it, and which office keeps the record.

- Find your registering office
- Temple property check
- Waqf property check
- RERA register

Every free tool
/tools

Services we run for you
/services

The LandLens suite
/landlens/one

Verified RealEstate™

Every claim in this document traces back to a government record.

- Legal opinions, due diligence and title verification
- Building plan, layout and sub-division approvals
- Completion and occupancy certificates, regularisation
- Escrow, negotiation and NRI property management
- Land survey, soil testing, architecture and construction

Verified RealEstate
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India
hello@verified.realestate
+91 9996 12 9996

Prepared from the registers named on the page each finding sits on. Where a register could not be read, this document says so in its place rather than leaving the gap to be read as a clean result.