Verified RealEstate™

Your trusted partner for buying, selling, and managing property, ensuring hassle-free service with 100% transparency.


3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India


hello@verified.realestate
+91 9996 12 9996


Official Property Record


Digitally Verified Record - Powered by Verified RealEstate™




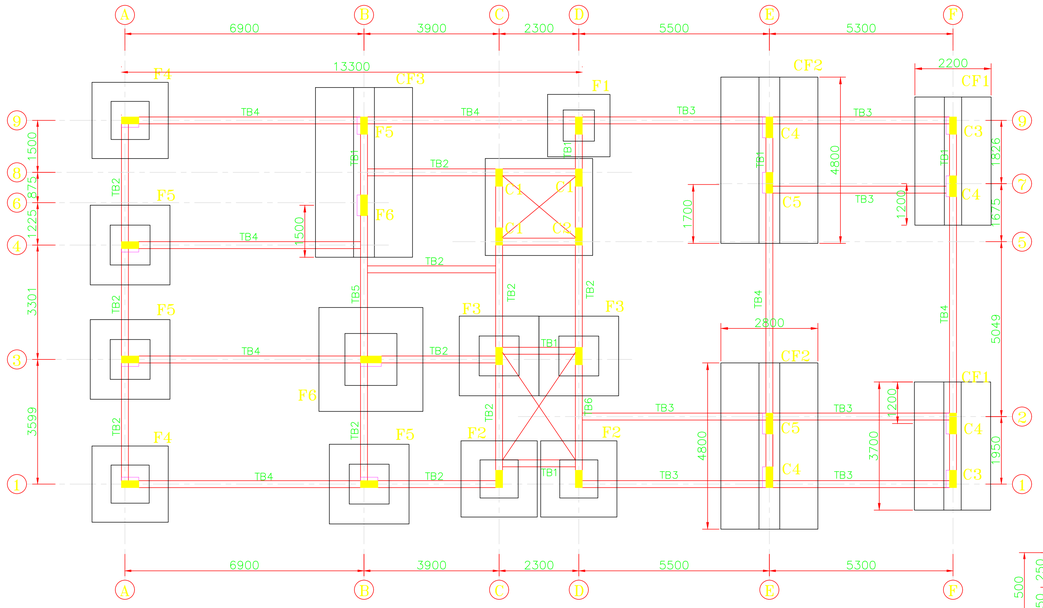


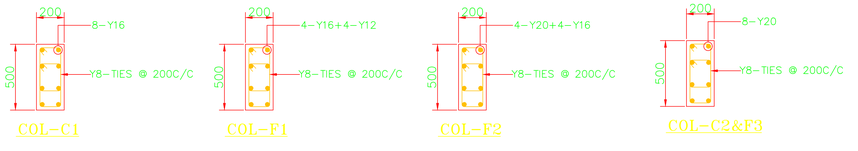


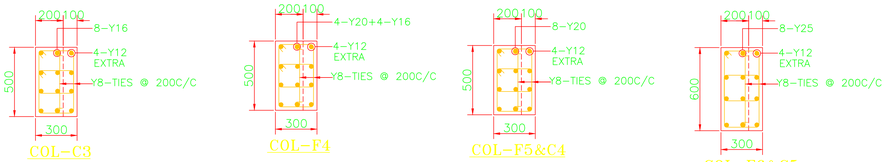


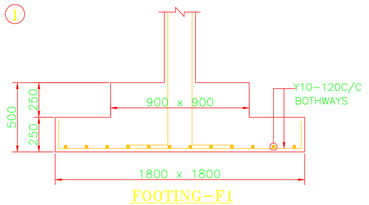


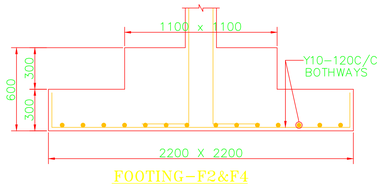


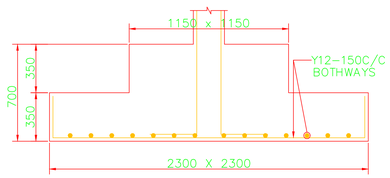


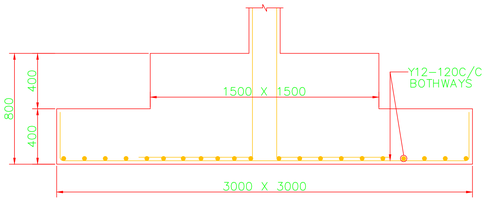








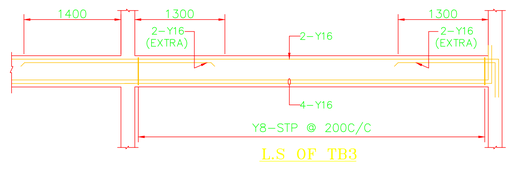





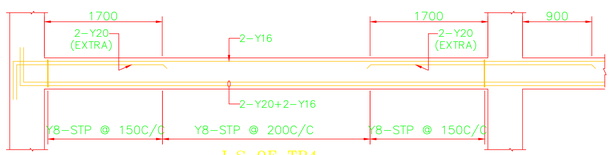





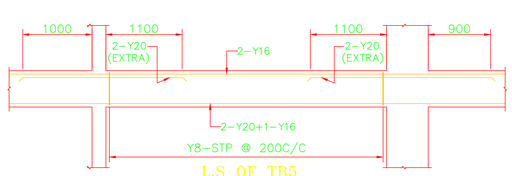








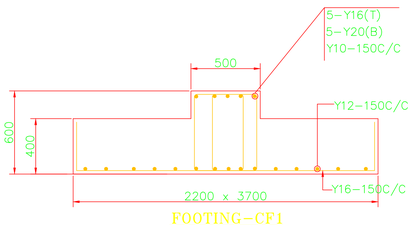


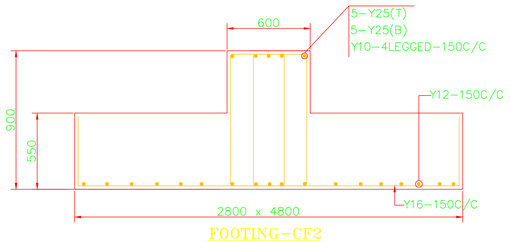

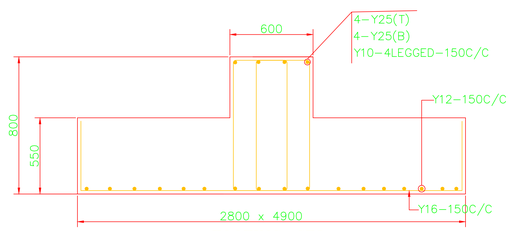

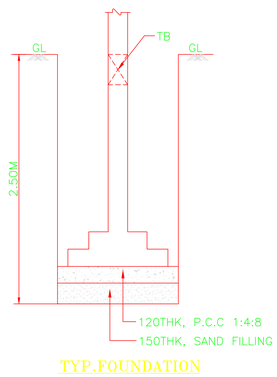

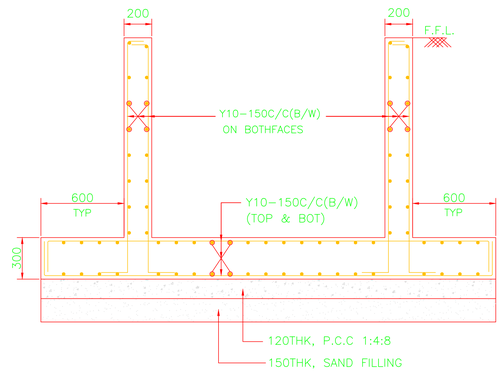

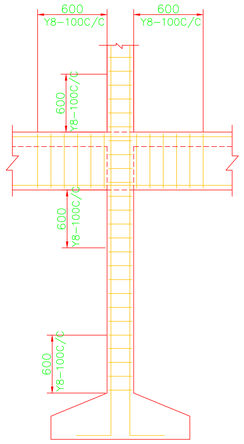

Notes:–

1. This drawing should be read along with architectural drawings.
2. Grade of R.C.C. items shall be M30 for column & M25 for all other R.C.C works
3. Y Denotes TOR50 Steel confirming to I.S. 1786 – 2008. Grade – Fe 500
4. Clear cover to the main steel
   - 50 for Footings , Raft Slabs & Raft Beams.
   - 40 for Columns.
   - 25 for Lintel & Beams.
   - 20 for Sunshade & Slab.
5. Lap length shall be 50 d (Max. dia) for all bars.
6. ——— Bottom Reinforcement
7. - - - - Top Reinforcement
8. Provide Continuous Chairs to keep the top Reinforcement in position
9. Provide Y 8 at 200 as Distribution steel for all top Reinforcement.
10. Spacer Bar to be Provided in Between Two Layers Of Reinforcement of Same Dia at Every 1000 C/ C.
11. Not more than 40% of Reinforcement shall be Lapped at any particular junction.
12. Cantilever props should not be released until the roof is concreted.
13. Foundation is designed for Stilt plus five upper floor only.
14. For Earthquake analysis Zone III is taken as per IS : 1893–2016 code.
15. Removal of formworks :
    - i) For Slabs :
    - a. Slabs spanning upto 4.5 m (15'–0") – 7 days
    - b. Slabs spanning over 4.5 m (15'–0") – 14 days
    - ii) For Beams and Arches :
    - c. Beams and Arches spanning upto 6 m (20'–0") –14days
    - d. Beams and Arches spanning over 6 m (20'–0") –21days

R.NO	DATE	DESCRIPTION

PROJECT

PROPOSED RESIDENTIAL BUILDING AT ANNA NAGAR, MADURAI.


FOUNDATION DETAIL


DESIGNED	KANNAN		SCALE	1 : 100
DRAWN	SWATHI		DATE	06–03–2024

STRUCTURAL CONSULTANTS:


C.KANNAN B.E., M.E(STRUCTURE)
DOOR NO:21, PLOT NO:257–W,
FLAT NO:2B, "UTOPIA APARTMENTS",
2nd FLOOR, 4th MAIN ROAD,
INDIRA NAGAR, CHENNAI–20.
MOBILE NO: 098412 49815.
E–MAIL:kannankds2007@gmail.com

FILE NAME : D/SWATHI/JAN/ANNA NAGAR–MADURAI

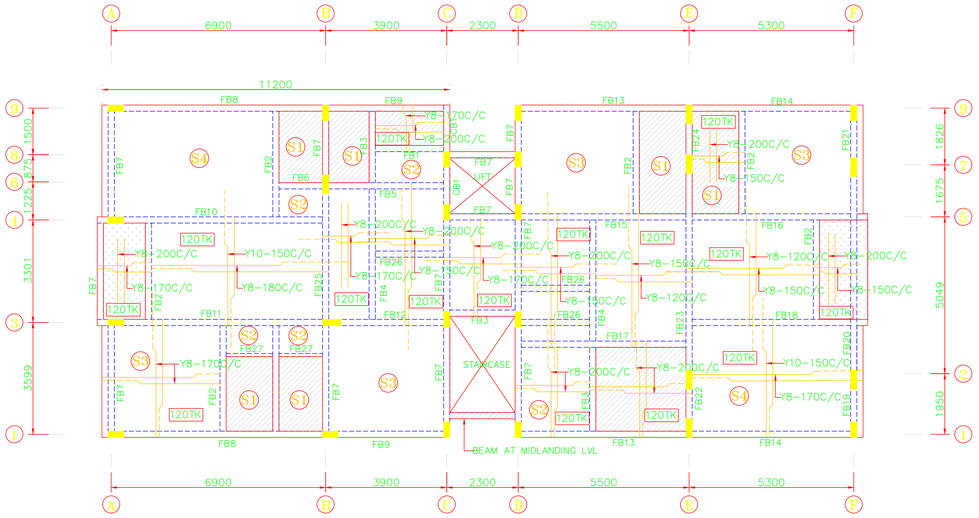





C.S OF FB1




C.S OF FB2




C.S OF FB3



L.S OF FB4




C.S OF FB4




L.S OF FB6


L.S OF FB5




C.S OF FB6




C.S OF FB5



C.S OF FB26




C.S OF FB7




L.S OF FB8


L.S OF FB9




C.S OF FB8




C.S OF FB9




L.S OF FB10



C.S OF FB10




C.S OF FB27




L.S OF FB11


L.S OF FB12



C.S OF FB11




C.S OF FB12

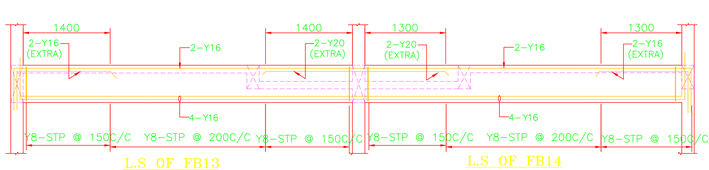


L.S OF FB13


L.S OF FB14



C.S OF FB13




C.S OF FB14




L.S OF CB1

L.S OF CB1




C.S OF CB1

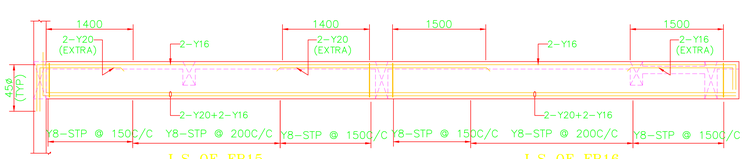


L.S OF FB15


L.S OF FB16




C.S OF FB15




C.S OF FB16

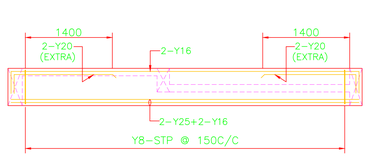


L.S OF FB17




C.S OF FB17



L.S OF FB18




C.S OF FB18

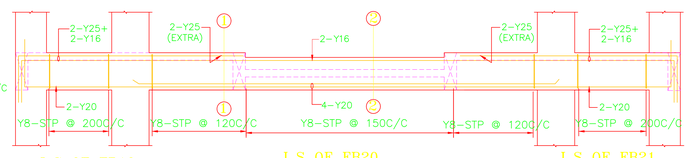


L.S OF FB19

L.S OF FB20


L.S OF FB21




C.S OF FB19




C.S OF FB20
(SECTION 1 1)



C.S OF FB20
(SECTION 2 2)




C.S OF FB21

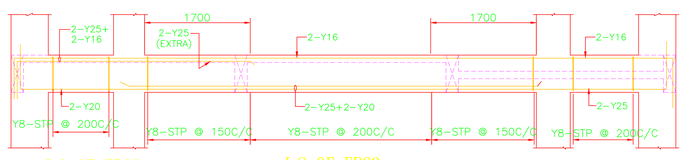


L.S OF FB22

L.S OF FB23

L.S OF FB24



C.S OF FB22



C.S OF FB23

C.S OF FB24

L.S OF FB25

C.S OF FB25

Notes:-

1. This drawing should be read along with architectural drawings.
2. Grade of R.C.C. items shall be M30 for column & M25 for all other R.C.C works
3. Y Denotes TOR50 Steel confirming to I.S. 1786 – 2008. Grade – Fe 500
4. Clear cover to the main steel
   50 for Footings , Raft Slabs & Raft Beams.
   40 for Columns.
   25 for Lintel & Beams.
   20 for Sunshade & Slab.
5. Lap length shall be 50 d (Max. dia) for all bars.
6. ——— Bottom Reinforcement
7. - - - - Top Reinforcement
8. Provide Continuous Chairs to keep the top Reinforcement in position
9. Provide Y 8 at 200 as Distribution steel for all top Reinforcement.
10. Spacer Bar to be Provided in Between Two Layers Of Reinforcement of Same Dia at Every 1000 C/ C.
11. Not more than 40% of Reinforcement shall be Lapped at any particular junction.
12. Cantilever props should not be released until the roof is concreted.
13. Foundation is designed for Stilt plus five upper floor only.
14. For Earthquake analysis Zone III is taken as per IS : 1893-2016 code.
15. Removal of formworks :
    i) For Slabs :
    a. Slabs spanning upto 4.5 m (15'-0") – 7 days
    b. Slabs spanning over 4.5 m (15'-0") – 14 days
    ii) For Beams and Arches :
    c. Beams and Arches spanning upto 6 m (20'-0") -14days
    d. Beams and Arches spanning over 6 m (20'-0") -21days

TYP. SEC. FOR STP. DETAILS

R.NO	DATE	DESCRIPTION

PROJECT

PROPOSED RESIDENTIAL BUILDING AT ANNA NAGAR, MADURAI.


STILT FLOOR ROOF DETAIL


DESIGNED	KANNAN		SCALE	1 : 100
DRAWN	MAHALINGAM		DATE	06-03-2024

STRUCTURAL CONSULTANTS:


C.KANNAN B.E., M.E(STRUCTURE)
DOOR NO:21, PLOT NO:257-W,
FLAT NO:2B, "UTOPIA APARTMENTS",
2nd FLOOR, 4th MAIN ROAD,
INDIRA NAGAR, CHENNAI-20.
MOBILE NO: 098412 49815.
E-MAIL:kannankds2007@gmail.com

FILE NAME : D/MAHALINGAM/2024/JAN/ANNANAGAR-MADURAI

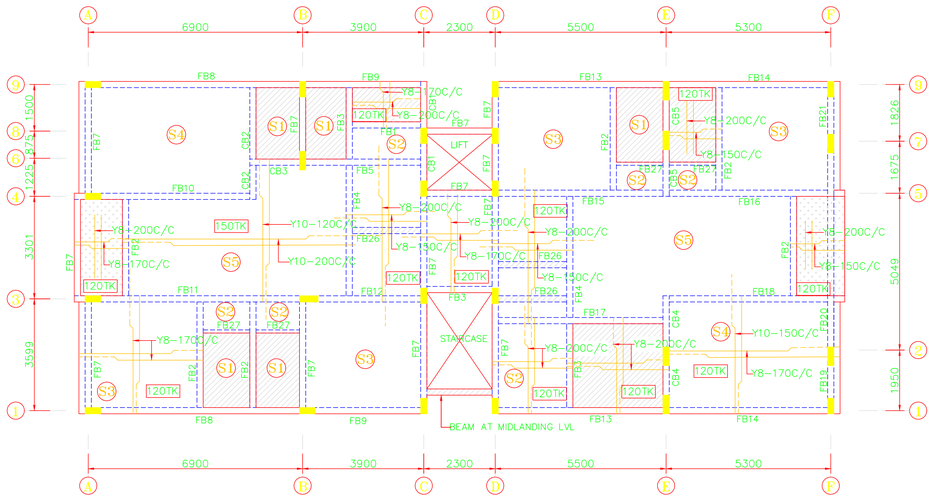





C.S OF FB1




C.S OF FB2




C.S OF FB3




L.S OF FB4




C.S OF FB4




L.S OF CB3 L.S OF FB5




C.S OF CB3




C.S OF FB5




C.S OF FB7




L.S OF FB8 L.S OF FB9




C.S OF FB8




C.S OF FB9

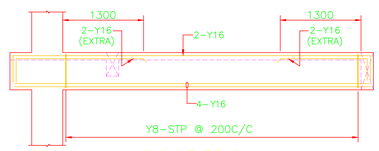


L.S OF FB10



C.S OF FB10




L.S OF CB4 L.S OF CB4




C.S OF CB4


L.S OF FB11 L.S OF FB12




C.S OF FB11




C.S OF FB12

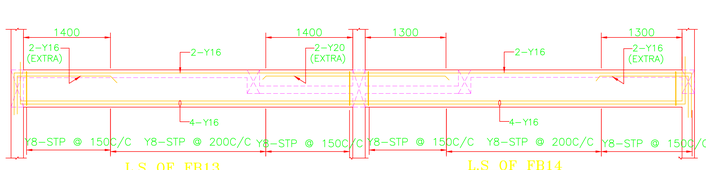


L.S OF FB13 L.S OF FB14




C.S OF FB13




C.S OF FB14

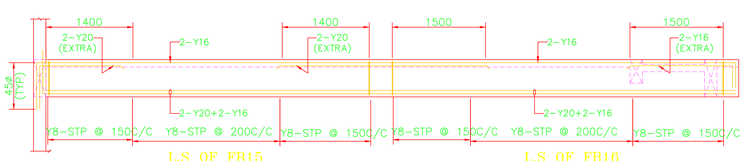


L.S OF FB15 L.S OF FB16




C.S OF FB15




C.S OF FB16




L.S OF FB17




C.S OF FB17

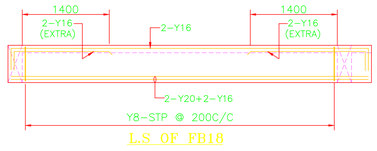


L.S OF FB18




C.S OF FB18

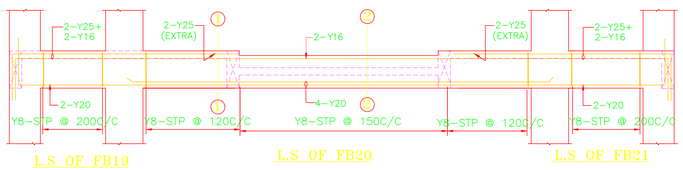


L.S OF FB19 L.S OF FB20 L.S OF FB21




C.S OF FB19




C.S OF FB20
(SECTION 1 1)




C.S OF FB20
(SECTION 2 2)




C.S OF FB21




C.S OF FB26




C.S OF FB27




L.S OF CB1 L.S OF CB1



C.S OF CB1



L.S OF CB2 L.S OF CB2



C.S OF CB2

L.S OF CB5 L.S OF CB5

C.S OF CB5

TYP. SEC. FOR
STP. DETAILS

= 260 SUNKEN

= 75 SUNKEN

Notes: -

1. This drawing should be read along with architectural drawings.
2. Grade of R.C.C. items shall be M30 for column & M25 for all other R.C.C works
3. Y Denotes TOR50 Steel confirming to I.S. 1786 – 2008. Grade – Fe 500
4. Clear cover to the main steel
   50 for Footings , Raft Slabs & Raft Beams.
   40 for Columns.
   25 for Lintel & Beams.
   20 for Sunshade & Slab.
5. Lap length shall be 50 d (Max. dia) for all bars.
6. ——— Bottom Reinforcement
7. - - - - Top Reinforcement
8. Provide Continuous Chairs to keep the top Reinforcement in position
9. Provide Y 8 at 200 as Distribution steel for all top Reinforcement.
10. Spacer Bar to be Provided in Between Two Layers Of Reinforcement of Same Dia at Every 1000 C/ C.
11. Not more than 40% of Reinforcement shall be Lapped at any particular junction.
12. Cantilever props should not be released until the roof is concreted.
13. Foundation is designed for Stilt plus five upper floor only.
14. For Earthquake analysis Zone III is taken as per IS : 1893-2016 code.
15. Removal of formworks :
    i) For Slabs :
    a. Slabs spanning upto 4.5 m (15'-0") – 7 days
    b. Slabs spanning over 4.5 m (15'-0") – 14 days
    ii) For Beams and Arches :
    c. Beams and Arches spanning upto 6 m (20'-0") -14days
    d. Beams and Arches spanning over 6 m (20'-0") -21days

R.NO	DATE	DESCRIPTION

PROJECT

PROPOSED RESIDENTIAL BUILDING AT ANNA NAGAR, MADURAI.


TYPICAL FLOOR ROOF DETAIL


DESIGNED	KANNAN		SCALE	1 : 100
DRAWN	MAHALINGAM		DATE	06-03-2024

STRUCTURAL CONSULTANTS:


C.KANNAN B.E., M.E(STRUCTURE)
DOOR NO:21, PLOT NO:257-W,
FLAT NO:2B, "UTOPIA APARTMENTS",
2nd FLOOR, 4th MAIN ROAD,
INDIRA NAGAR, CHENNAI-20.
MOBILE NO: 098412 49815.
E-MAIL:kannankds2007@gmail.com

FILE NAME : D/MAHALINGAM/2024/JAN/ANNANAGAR-MADURAI

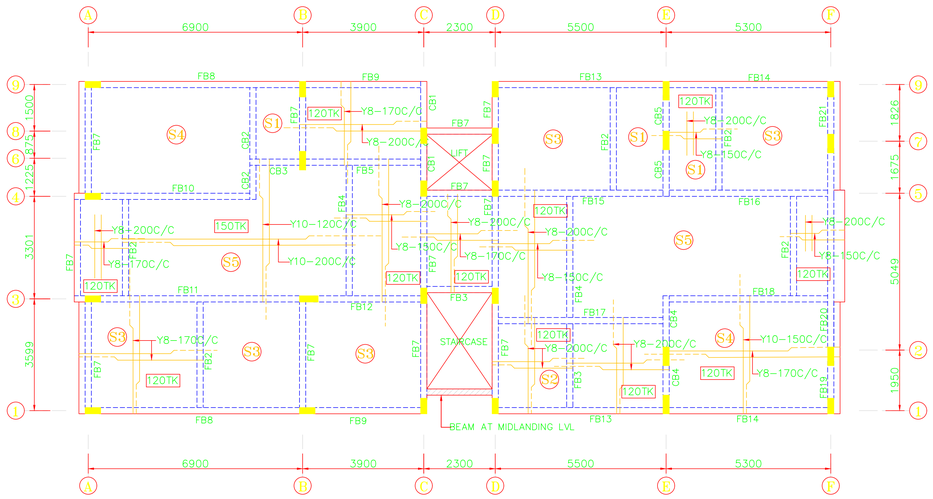





C.S OF FB2




C.S OF FB3



L.S OF FB4




C.S OF FB4




L.S OF CB3


L.S OF FB5




C.S OF CB3



C.S OF FB5




C.S OF FB7

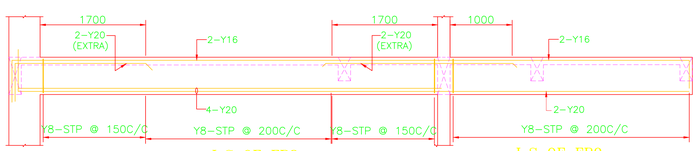


L.S OF FB8


L.S OF FB9




C.S OF FB8




C.S OF FB9

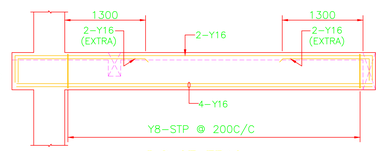

L.S OF FB10




C.S OF FB10




L.S OF CB4


L.S OF CB4



C.S OF CB4




TYP. SEC. FOR
STP. DETAILS




L.S OF FB11


L.S OF FB12



C.S OF FB11




C.S OF FB12




L.S OF FB13


L.S OF FB14



C.S OF FB13




C.S OF FB14

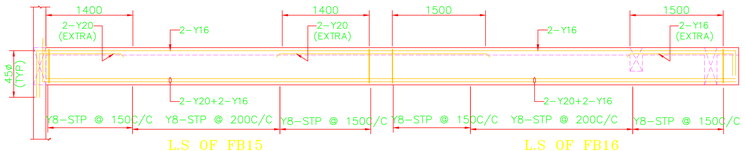


L.S OF FB15


L.S OF FB16




C.S OF FB15




C.S OF FB16

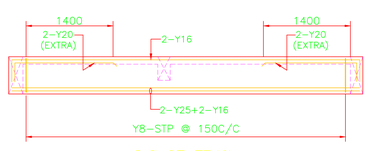


L.S OF FB17




C.S OF FB17

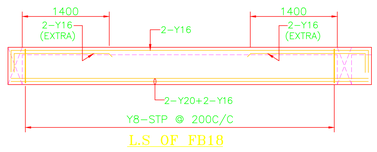

L.S OF FB18




C.S OF FB18

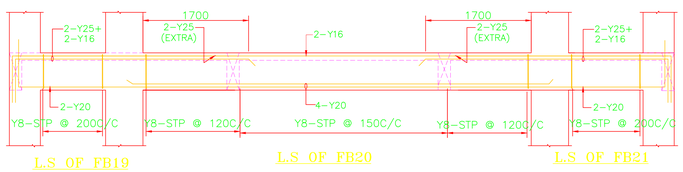


L.S OF FB19

L.S OF FB20


L.S OF FB21




C.S OF FB19



C.S OF FB20




C.S OF FB21




L.S OF CB1

L.S OF CB1




C.S OF CB1




L.S OF CB2

L.S OF CB2




C.S OF CB2



L.S OF CB5

L.S OF CB5



C.S OF CB5

Notes: –

1. This drawing should be read along with architectural drawings.
2. Grade of R.C.C. items shall be M30 for column & M25 for all other R.C.C works
3. Y Denotes TOR50 Steel confirming to I.S. 1786 – 2008. Grade – Fe 500
4. Clear cover to the main steel
   50 for Footings , Raft Slabs & Raft Beams.
   40 for Columns.
   25 for Lintel & Beams.
   20 for Sunshade & Slab.
5. Lap length shall be 50 d (Max. dia) for all bars.
6. ——— Bottom Reinforcement
7. – – – – Top Reinforcement
8. Provide Continuous Chairs to keep the top Reinforcement in position
9. Provide Y 8 at 200 as Distribution steel for all top Reinforcement.
10. Spacer Bar to be Provided in Between Two Layers Of Reinforcement of Same Dia at Every 1000 C/ C.
11. Not more than 40% of Reinforcement shall be Lapped at any particular junction.
12. Cantilever props should not be released until the roof is concreted.
13. Foundation is designed for Stilt plus five upper floor only.
14. For Earthquake analysis Zone III is taken as per IS : 1893-2016 code.
15. Removal of formworks :
    i) For Slabs :
    a. Slabs spanning upto 4.5 m (15'-0") – 7 days
    b. Slabs spanning over 4.5 m (15'-0") – 14 days
    ii) For Beams and Arches :
    c. Beams and Arches spanning upto 6 m (20'-0") –14days
    d. Beams and Arches spanning over 6 m (20'-0") –21days

R.NO	DATE	DESCRIPTION

PROJECT

PROPOSED RESIDENTIAL BUILDING AT ANNA NAGAR, MADURAI.

TERRACE FLOOR ROOF DETAIL

DESIGNED	KANNAN		SCALE	1 : 100
DRAWN	MAHALINGAM		DATE	06-03-2024

STRUCTURAL CONSULTANTS:

C.KANNAN B.E., M.E(STRUCTURE)
DOOR NO:21, PLOT NO:257-W,
FLAT NO:2B, "UTOPIA APARTMENTS",
2nd FLOOR, 4th MAIN ROAD,
INDIRA NAGAR, CHENNAI-20.
MOBILE NO: 098412 49815.
E-MAIL:kannankds2007@gmail.com

FILE NAME : D/MAHALINGAM/2024/JAN/ANNANAGAR-MADURAI



our services doesn't just end there

Buying & Selling Services

Property Buying Assistance, Property Selling Support, Market Price Analysis, Owner Outreach and Negotiation.

Legal & Documentation Services

Certified EC, Patta, legal opinions, property verification, due diligence, litigation solutions, and legal heir certificates.

Property Development & Approvals

Building plan approvals, construction, layout and sub-division approvals, zone conversion, and occupancy certification.

NRI & Investment Services

Escrow Services, Rentals, Litigation Solutions, Property Valuation and Property Management

Compliance & Special Services

Demolition, Vaasthu checks, regularization of unauthorized buildings, and office space solutions.



empowering your real estate decisions with smart tools

Property Valuation & Cost Estimation

Guideline Value, Apartment Composite Value, Stamp Duty & Registration Fees Calculator, Building Value Calculator, Capital Gains Calculator, Area Unit Converter, Length Unit Converter

Ownership, Compliance & Legal Verification

Encumbrance Certificate (EC) Search, Find Your SRO, Temple Property Check, WAQF Property Check, View Patta/Chitta, View FMB, Patta Analyzer, EC Analyzer

Zoning & Land Use Analysis

Land Use Zone Finder, CRZ Zone Check, Aquifer Zone Check, CBA Check, EWS Check, Road Width Check, Proposed Road Widening Check, FSI Calculator

Property Documentation & Workflow Tools

Forms & Templates, Document Generator, Document Translation, Dictionary

Vastu & Property Management Tools

Home Vastu Shastra, Plot Vastu Shastra, Property Management

Verified RealEstate™

We're honored to be part of your real estate journey

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996
www.verified.realestate