PP APPROVAL RECORD

Planning Permission

Coimbatore district, Tamil Nadu

APPROVAL TYPE
Layout Approval

ISSUING AUTHORITY
DTCP

The approval as the planning authority issued it, reproduced in full behind this page.

An approval speaks to what was sanctioned, not to what was built. Completion is a separate record.

Verified RealEstate™
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India

hello@verified.realestate
+91 9996 12 9996
verified.realestate


மாவட்ட நகர் ஊரமைப்பு அலுவலகம் கோயம்புத்தூர் மாவட்டம்

காரேகவுண்டன்பாளையம் ஊராட்சி

கோயம்புத்தூர் மாவட்டம், அன்னூர் வட்டம், அன்னூர் ஊராட்சி ஒன்றியம்,
காரேகவுண்டன்பாளையம் ஊராட்சி மற்றும் கிராமம் க.ச.எண்: 514 / 1B2 - ல்
அமையும் உத்தேச குடியிருப்பு மனைப்பிரிவுக்கான தொழில்நுட்ப ஒப்புதல் வரைபடம்.

அளவு : 1" = 33'0" (1:400)

Online application number : FX9R507I

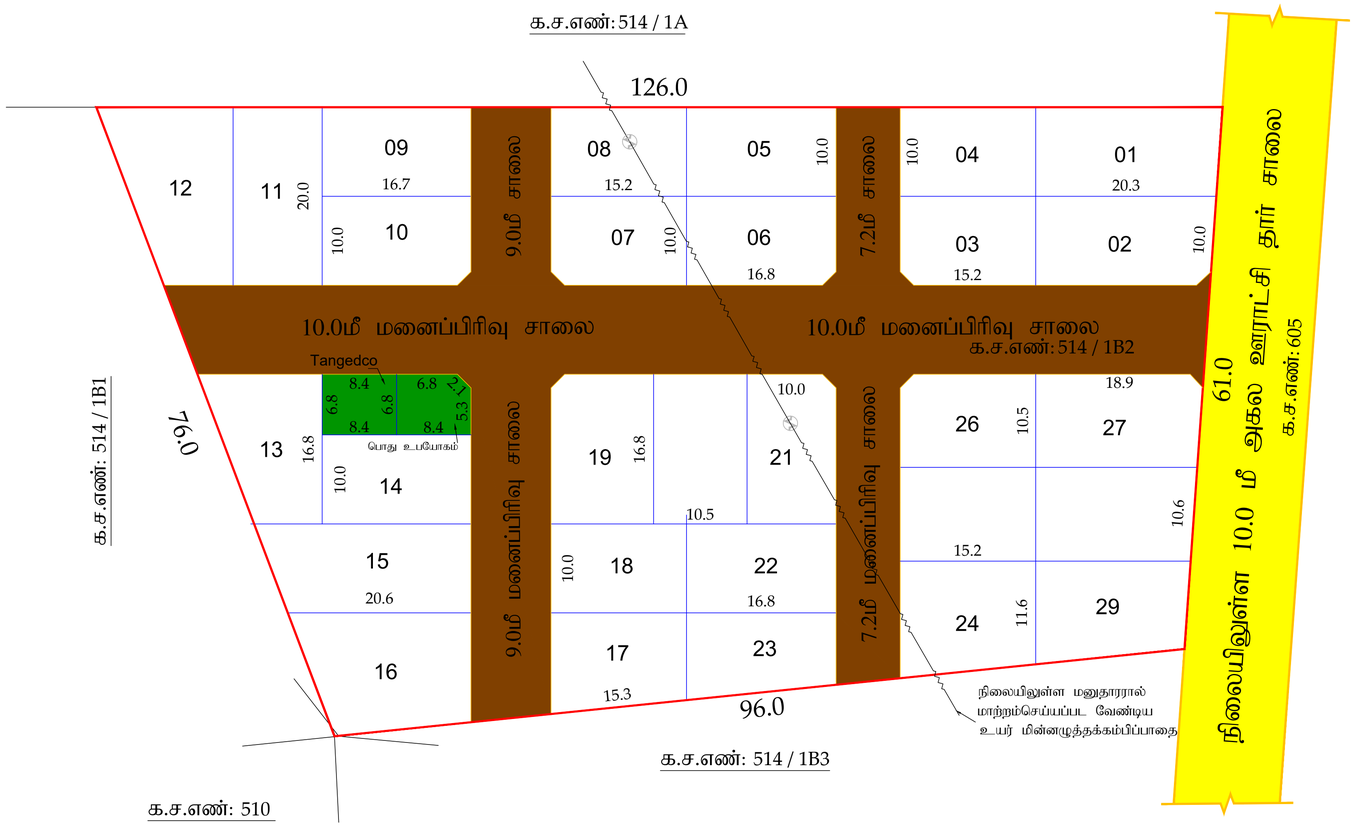

குறிப்பு

மனைப்பிரிவின் மொத்தப்பரப்பு : 1.87 ஏக்கர் (7572.00 ச.மீ)

கோரிய மனைகள் : 32

ஒதுக்கிய மனைகள் : 29

மனைப்பிரிவின் எல்லை

நிலையிலுள்ள சாலை

பொது ஒதுக்கீடு

உள்ளாட்சிக்கு தானமாக ஒப்படைக்கபட்டவை :

மனைப்பிரிவு சாலை = 2084.86 ச.மீ

பூங்காவிற்கு தேவையான பரப்பு = (மனைப்பிரிவு பரப்பு - மனைப்பிரிவு சாலையின் பரப்பு x 10 %
= (7572.00 - 2084.86) x 10 % = 548.71 ச.மீ

பூங்கா ஒதுக்கீடு பரப்பு = 548.71 ச.மீ க்கு அரசு வழிகாட்டு மதிப்பு தொகை மனுதாரரால் செலுத்தப்பட்டுள்ளது.

பொது ஒதுக்கீடு:

உள்ளாட்சிக்கு தானமாக ஒப்படைக்கபட்ட பொது ஒதுக்கீடு பரப்பு
(மனைப்பிரிவின் மொத்தப்பரப்பு - உத்தேச சாலை x 0.5%)
(7572.00 - 2084.86) x 0.5 = 27.43 ச.மீ
ஒப்படைக்கப்பட்ட பரப்பு - 56.0 ச.மீ - 2.04 %

TANGEDCO - க்கு (அ) உள்ளாட்சிக்கு தானமாக ஒப்படைக்கபட்ட பொது ஒதுக்கீடு பரப்பு
(மனைப்பிரிவின் மொத்தப்பரப்பு - உத்தேச சாலை x 0.5%)
(7572.00 - 2084.86) x 0.5 = 27.43 ச.மீ
ஒப்படைக்கப்பட்ட பரப்பு - 57.12 ச.மீ - 2.08 %

கட்டிட வரம்பு :

9.0 மீ வரை அகலம் உள்ள சாலைகளுக்கு 1.50மீ விடப்படல் வேண்டும்.
9.0 மீ முதல் 18.0மீ வரை அகலம் உள்ள சாலைகளுக்கு 3.0மீ விடப்படல் வேண்டும்.
மூலை முடக்கு :
12.0மீ வரை உள்ள சாலைகளுக்கு 1.50மீ x 1.50மீ விடப்படல் வேண்டும்.
12.0மீ முதல் 30.5மீ வரை உள்ள சாலைகளுக்கு 4.50மீ x 4.50மீ விடப்படல் வேண்டும்.

நிபந்தனைகள்

1. அரசாணை எண் . 18 ந.நி (ம) கு.வ.துறை நாள்: 04.02.2019 ன் படி சாலைகள் மற்றும் பொது உபயோகம் உள்ளாட்சிக்கு தானமாகவும், அரசாணை எண். 16 ந.நி (ம) கு.வ.துறை நாள்: 31.01.2020 ன் படி TANGEDCO -க்கான பரப்பு TANGEDCO - க்கு (அ) உள்ளாட்சிக்கு தானமாகவும் ஒப்படைக்கப்பட்டுள்ளது.
2. இம்மனைப்பிரிவிற்கு ஊராட்சி இறுதி ஒப்புதல் அளிக்கும் முன் இடத்தில் எந்த துறையாலும் நில ஆர்ஜித நடவடிக்கை எடுக்கப்படவில்லை என்றும் எந்த துரைக்காகவும் நில ஆர்ஜிதப் பட்டியல் மாவட்ட வருவாய் அலுவலருக்கு அனுப்பப்படவில்லை என்றும் தலைவர் உறுதி செய்து கொள்ள வேண்டும்.
3. நில உரிமை குறித்து வழங்கப்பட்ட சான்றுகள் மற்றும் பரிசீலனைக்கு சமர்ப்பிக்கப்பட்ட ஆவணங்கள் சரியானவை அல்ல எனஅறியப்பட்டால் அல்லது மனைப்பிரிவுக்கு தொழில்நுட்ப ஒப்புதல் வழங்கியதால் பாதிப்பு ஏற்படக்கூடிய சூழ்நிலை ஏற்படின் மனைப்பிரிவுக்கு வழங்கப்பட்ட தொழில்நுட்ப ஒப்புதல் எவ்வித முன்னறிவிப்புமின்றி நகர் ஊரமைப்பு இயக்குநர்சென்னை அவர்களால் ரத்து செய்யப்படும்.
4. விற்பனைக்குண்டான மனைகளை விற்பனை செய்யும் போது இவ்வாணையின் நகலோடு நகர் ஊரமைப்புத்துறையில் ஒப்புதல் அளிக்கப்பட்ட வரைபட நகல் மனை வாங்குபவர்களுக்கு கட்டாயம் வழங்கப்பட வேண்டும்.
5. ஒப்புதல் அளிக்கப்பட்ட மனைப்பிரிவு வரைபடத்தை எந்த வித மாற்றம் விடுதலின்றி மனைப்பிரிவு நுழைவாயிலில் 6' x 4' அளவிலான நிரந்தர தகவல் பலகை மூலம் பொதுமக்கள் பார்வைக்கு நிரந்தரமாக பிரசுரிக்கப்பட வேண்டும்.
6. உத்தேச மனைப்பிரிவில் தார் சாலை, மழைநீர் வடிகால் வசதி, மேல்நிலைநீர் தேக்க தொட்டியுடன் கூடிய குடிநீர் வசதிகள் (ம) தெருவிளக்குகள் ஆகியவை உள்ளாட்சியின் தகுதிகேற்ப அமைக்கப்பட்ட பின்னர் இறுதி ஒப்புதல் வழங்கப்பட வேண்டும்.

ம.வ. / (கோ.மா) எண் : 353 / 2023

சு. பாபு
வரைவாளர் நிலை - III

பொ. வசந்தி
கட்டிடகலை / திட்ட உதவியாளர்

உதவி இயக்குநர் / இணை இயக்குநர் (பொ)
மாவட்ட நகர் ஊரமைப்பு அலுவலகம்
கோயம்புத்தூர்

THE LANDLENS SUITE

Eight ways to know a piece of land before you pay for it.

This report covers one part of the picture. These cover the rest, drawn from the same government records, for any property in Tamil Nadu.

LandLens One
Ask anything about a property and get an answer grounded in live government records, with the sources shown.
/landlens/one

Verify My Land
Every record check run on one property and returned as a single report.
/landlens/verify-my-land

Legal Opinion
An advocate's written opinion on the title, built on the records we pull for it.
/landlens

One Map
Every layer on one map: the parcel, its boundary, zoning, water bodies and what sits around it.
/landlens/one/map

PriceMap
What land actually changed hands for around this plot, taken from the registered deeds.
/landlens/pricemap

Build Scope
What you are allowed to build here: floor space, height, coverage and setbacks.
/landlens/build-scope

Property Tracker
Watch a property and hear about it when something new is registered against it.
/landlens/property-tracker

Deal Room
Run the transaction in one place: documents, stamping, signatures and the parties.
/landlens/deal-room

FREE TOOLS · NO ACCOUNT NEEDED

Twenty-four checks you can run yourself, at no cost.

Records and verification

The registers themselves, read for you.

- Encumbrance Certificate
- Patta and Chitta
- Field Measurement Sketch
- EC Analyzer
- Bank charge check
- Court case search
- Seller background check
- Approval check by survey

Value and duty

What it is worth and what it costs to register.

- Guideline value by street
- Guideline value by survey
- Stamp duty and registration fees
- Capital gains
- Floor space index
- Area unit converter

Zoning and land use

What the plan says can happen on this land.

- Land use zone finder
- CMDA land use check
- Coastal regulation zone
- Master plan check
- Water bodies finder
- Airport height clearance

Registers and directories

Who holds it, and which office keeps the record.

- Find your registering office
- Temple property check
- Waqf property check
- RERA register

Every free tool
/tools

Services we run for you
/services

The LandLens suite
/landlens/one

Verified RealEstate™

Every claim in this document traces back to a government record.

- Legal opinions, due diligence and title verification
- Building plan, layout and sub-division approvals
- Completion and occupancy certificates, regularisation
- Escrow, negotiation and NRI property management
- Land survey, soil testing, architecture and construction

Verified RealEstate
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India
hello@verified.realestate
+91 9996 12 9996

Prepared from the registers named on the page each finding sits on. Where a register could not be read, this document says so in its place rather than leaving the gap to be read as a clean result.