PLAN SHOWING THE PROPOSED CONSTRUCTON OF RCC ROOF GROUND FLOOR COMMERCIAL (SHOP) BUILDING (AFTER DISMANTLING THE EXISTING BUILDING) IN, DOOR NO: 279, (EXT TAX NO:73), NEW NATHAM SURVEY NO: 74/3M, SATHY TO K.N PALAYAM ROAD, PERIYAKODIVERI VILLAGE & TOWN PANCHAYAT, GOBICHETTIPALAYAM TALUK , ERODE DISTRICT.

APPLICANT : Mr.M.BHOOVENDRAN, S/O,MARAPPAGOUNDER.


AREA DETAILS :	SQ.FT.	SQ.MT.
Area As Per Document	4305.60	400.00
Area Of Ext Building To Be Dismantled	1237.86	115.00
Plinth Area Of Ground Floor Building	1948.92	181.06
Floor Area Of Ground Floor Building	1364.25	126.74
Area Of Open Space	3067.74	285.00


JOINERY DETAILS	FEET	METER
MD - Door	3'3" x 7'0"	0.99 x 2.10
O - Open	5'0" x 7'0"	1.52 x 2.10
D - Door	3'3" x 7'0"	0.99 x 2.10
D1 - Door	2'6" x 7'0"	0.75 x 2.10
W1 - Window	3'0" x 4'6"	0.91 x 1.40
V - Ventilator	3'0" x 1'6"	0.91 x 1.40
V1 - Ventilator	2'0" x 2'0"	0.61 x 0.61


Pro. SEPTIC TANK - 1No
Pro. RAIN WATER TANK - 1No


NOTES:
ALL DIMENSIONS ARE IN METER.
PLAN, SECTION & ELEVATION SCALE - 1:100,
SITE PLAN SCALE - 1:100


- APPLICANT BOUNDARY
- PROPOSED BUILDING
- EXISTING ROAD

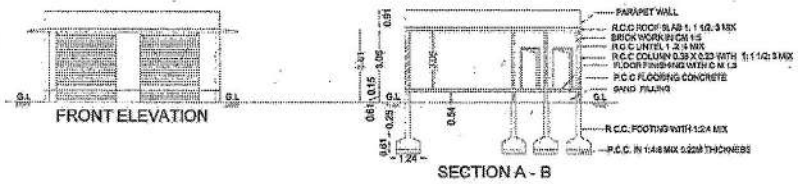

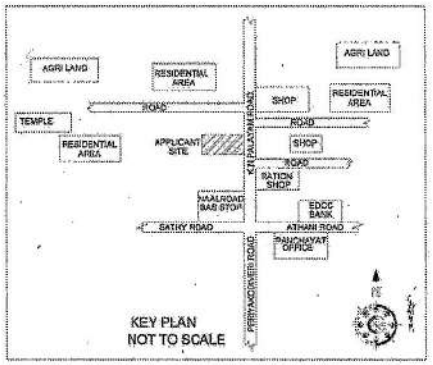

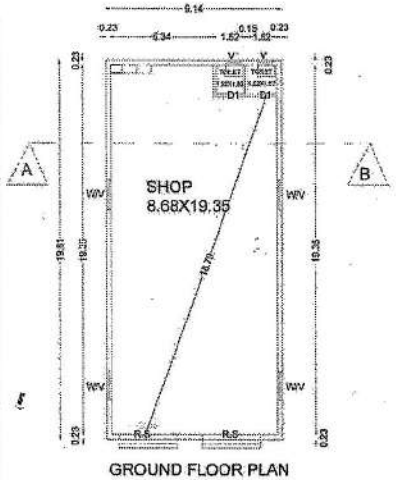

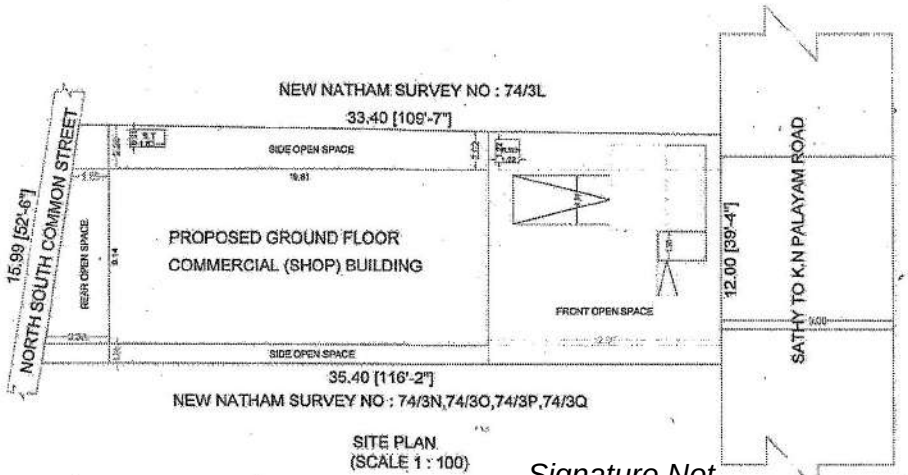



APPLICANT

Er.S.Tinesh Kumar,
B.E.,P.G.D(OSEV),C.Eng.,A.M.I.E.,M.I.S.T.E.,
Registered Civil Engineer
(0614/S/2019/00002)
#71, Thangam Complex, Athani Main Road,
Sathyamangalam, Erode (Dt) ,638 401
ENGINEER & LBS

Signature Not Verified
Signed by: Executive Officer
Location:Erode
Date:2024.01.18 11:55:30

18/01/2024

EXECUTIVE OFFICER
Periyakodivery Town Panchayat.