Verified RealEstate™

RE REGULATORY RECORD

RERA Document

The document as the regulator published it, reproduced in full behind this page.

Published for reference. The authority's own register is the operative record.

Verified RealEstate™
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India

hello@verified.realestate
+91 9996 12 9996
verified.realestate

DIGITALLY VERIFIED RECORD

பெருநகர சென்னை மாநகராட்சி

Greater Chennai Corporation

நகரமைப்பு பிரிவு

Town Planning Section-Works

கட்டிட அனுமதி

Building Permission

(1919 ஆம்ஆண்டின் சென்னை மாநகராட்சி சட்டம் 238 வது பிரிவின் படி)

(1919 MCMC Act Section 238)

கட்டட அனுமதி எண்/ Building Plan No		திட்ட அனுமதி எண்/Plan Submission No	
CEBA/WDCN13/00457/2025		CMDA/PP/NHRB/S/0695/2025 - 15/10/2025	
மண்டலம் / Zone	வார்டு / Ward	அனுமதி நாள் / Approval Date	விண்ணப்பித்த நாள்/ Application Date
N13	N179	05/11/2025	16/10/2025
விண்ணப்பதாரரின் பெயர் மற்றும் குடியிருப்பு முகவரி / Applicant name & address		SANNAREDDY HOMES Rep by its Proprietor Nithish Sannareddy-GPA for I.P.Balasubrahmanian (GF 1E) and 15 Others, Door No.32/2, 1st Street, Kamdar Nagar, Nungambakkam, Chennai 600034.	
சேவைக்கான நோக்கம் / Service Type		Building Permit for CMDA Approved Plan	
மனை அமைவிடம் / Plot address		Door No:New No.45 & 47, Old No. 25 & 26,Block No:51,Plot No:10 & 11, Survey No:T.S.No.21, Rukumani Road,Kalachatra Colony(N179),Besant Nagar(N179),Thiruvanmiyur, Chennai, 600090	
Building License Fees			391000
Road cut charges - CMWSSB SEWERAGE			35200
Road cut charges - CMWSSB, WATER			26400
Road cut charges - TNEB			26400
Scrutiny Fees			2100
Workers Welfare Board			529600
மொத்தக் கட்டணம்/ Total (In Rs.)			1010700

Amount (in words): Rupees Ten Lakhs Ten Thousands Seven Hundred Only

Amount 1010700
(In Rs.):

பின் குறிப்பிட்ட நிபந்தனைகளுடன் அனுமதிக்கு ஒப்பமிக்கப்பட்ட வரைபட நகலின்படி அனுமதி

Sanctioned for Building Permit for CMDA Approved Plan Subject to Terms and Condition on Rear Side and as per Sanctioned plan copy.

null

அனுமதி கால முடிவு 04/11/2030
Permit Valid upto 04/11/2030

Digitally Signed by Rajendran R
Date: 05-Nov-2025 (11:03:14)

Executive Engineer (T.P.)

GREATER CHENNAI CORPORATION

CHENNAI - 600003.

GUIDELINES FOR CONSTRUCTION AND DEMOLITION WASTE MANAGEMENT

In exercise of the powers conferred under section 199 of TNULB ACT 2023 and the Construction & Demolition Waste Management rules, 2016 and in order to ensure effective Construction & Demolition Waste Management in the Corporation of Chennai, the council hereby makes the Construction and demolition waste management Guidelines 2025.

1) **Waste Generator:** is defined by the C&D Rules as any person or association of persons or instructs residential and commercial establishments including Indian railways, airport, port and harbour and defence establishments who undertakes construction or demolition of any civil structure which generate C&D Waste. For this purpose "waste generators" shall be divided into four types and the definition for different types of waste generators are follows.

   i. **Micro generators** The small generation who occasionally generate C&D Waste less than 1 MT from minor house repairs, broken ceramic sanitary ware like tiles, bathtubs, commodes, washbasins etc.

   ii. **Small Generators:** Those that generate C&D waste during building renovation, remodeling or repairor maintenance works etc. where the total amount of C&D Waste generated in the entire project is more than 1 MT and less than 20 MT per day.

   It is clarified that if the project generates (a) an aggregate of 300 MT of C&D Waste per month and/or (b) pertains to demolition work covering an area equal to or more than 600 square metres, and/or (c) construction or building repair work covering an area equal to or more than of 6000 square metres, the waste generator will not be considered as a "Small Generator" and will have to comply with the requirements of a "Bulk waste generator"

   iii. **Bulk waste generators:** Waste generators who generate (a) 20 MT or more in one day or 300 MT per project in a month as identified separately in the C&D Rules and/or (b) demolition work covering an area equal to or more than 600 square metres, and/or (C) construction or building repair work covering an area equal to or more than 6000 square metres. They shall dispose the C&D waste at the processing location.

iv. **Service Providers:** They are defined as authorities who provide services like water, sewerage, electricity, telephone, roads, drainage etc. who often generate C&D Waste during their activities, which include excavation, demolition and civil work. For Greater Chennai Corporation, the following and their subsidiary organisations shall be indicatively considered as "Service Providers".

- Public Works Department (PWD) and Central Public Works Department (CPWD)
- Chennai Metro Rail Corporation (CMRL)
- National Highways Authority of India (NHAI)
- Airport Authority of India, Chennai (AAI, Chennai)
- Indian Railways
- Chennai Metropolitan Water Supply and Sewerage Board (CMWSSB)
- Chennai Metropolitan Development Authority (CMDA)
- Tamil Nadu Generation and Distribution Corporation Limited (TANGEDCO)
- Tamil Nadu Road Development Corporation (TNRDC)
- Tamil Nadu Electricity Board (TNEB)
- Tamil Nadu Urban Habitat Development Board (TNUHDB)
- Tamil Nadu Water Supply and Drainage Board (TWADB)

It is highlighted that GCC can introduce additional categories of waste generators for better management of C&D Waste if they deem fit.

The respective occupiers/owners/developers of a construction project shall be solely responsible for removal/transport/disposal of their C and D waste.

The occupiers can contact GCC's website for hiring services of the Construction and Demolition waste transporters or empanelled vendors or the GCC authorized Concessionaires and to pay necessary collection and transportation charges to transporters and pay for processing fee.

All generators shall not mix such Construction and Demolition wastes, inerts and debris with any other category of waste like wet waste, recyclable waste or any other types of wastes such as MSW, Plastic, Packaging material, gypsum, etc.

All hazardous wastes (explosive and related products fuels and heating oil, chemical admixtures, transformers Tar and Tar products etc) shall not be mixed with

C and D waste but sent separately to TNPCB authorized recyclers or to hazardous waste disposal sites at their own cost and furnish proof of compliance whenever demanded.

Non compliance of getting Constructions and Demolition Waste Management plan and payment of user charges will attract the penalties.

It is Inevitable to penalize those who generate Construction and Demolition waste who do not comply with the one mentioned frame work.

LIST OF APPROVED CONSTRUCTION& DEMOLITIONWASTE MANAGEMENT SITES DESIGNATED BYGCCFOR PROCESSING

Zone	Division	Name of the Facility & Address	Zones covered
4	37	Construction and Demolition waste processing facility, Kodungaiyur Dumping Ground	Zones 1 to 8
14	184	Construction and Demolition waste processing facility, Perungudi Dumping Ground	Zones 9 to 15

ILLUSTRATIVE RATES FOR SERVICE CHARGES

Part I – Service Charges payable by Waste Generators except Bulk waste Generators

S.No	Type of Waste Generators (excluding bulk waste generators)	Service charges in INR
1.	For collection and Transportation of C&D waste	1. Upto 1000 kg – free of cost 2. Rs. 2500.00 per 1MT (above 1MT and less than 20 MT) if GCC service requires

* These rates are indicative and, in the event, the GCC wants to change the Service fee from the above-mentioned rates due to any reason, it should cover the following costs for the GCC and /or private service provider on an aggregate basis:

1. Loading of C&D waste (manpower and equipment such as JCB) and Transportation costs from waste generation point to C&D waste collection centres / waste processing facilities (i.e fuel, maintenance costs of the vehicles and manpower) @ Rs.2500/- per MT
2. Costs of processing C&D Waste at the processing facilities @ Rs.800/- per MT

GCC will prescribe separate service charges fees for different C&D Waste management activities whenever new technologies are implemented. All payment gates will be available in GCC website.

PART II - Bulk Waste Generators deliver their waste :

Bulk Waste Generators transport their Construction and Demolition waste on their own cost and delivered to processing centre.

1. Costs of processing C&D Waste at the processing facilities @Rs.800/MT

PENALTIES (see Solid Waste Management Bye-law 2019 5.1 & 8)

Sl.No	Sub Section / Details of Section Rules	Penalty Amount (Rs.)
1	Unauthorized dumping of Construction and Demolition waste in all public places	Rs.5000.00

ILLUSTRATIVE PENALTIES FOR NON-COMPLIANCE

Sl.No	Offence	Bulk Generator/Service provider/Transporter INR)	Small Waste Generator (in INR)	Collection & Transportation service provider (in INR)
1.	Dumping of Construction and demolition waste in storm water drains, open spaces and other non-designated areas	5000 per ton of C&D waste dumped	3000 per ton of C&D waste dumped	3000 per ton of C&D waste dumped. In addition, the GCC, through appropriate authorities, can impound the vehicle which will be released upon compounding of offences and payment of fines
2	Non-Compliance of the conditions of the waste management plan	i. 25,000 per day of default if (a) Construction or repair work is upto 6000 square metres and /or (b) demolition is upto 600 square metres	N.A	N.A

Detail Guidelines for Construction and Demolition Waste Management is available in GCC Website.

Link -
https://chennaicorporation.gov.in/gcc/CandD_Waste_Management/C&D%20Waste%20guidelines%20in%20english.pdf

அறிவிப்பு

1. 1919 வது சட்டத்திய சென்னை மாநகராட்சி சட்டம், பிரிவு 107 மற்றும் 243 ன் படி இக்கட்டிட அனுமதி பெரில் கட்டப்பட்டதோ அல்லது கட்டிடம் முடிவுற்றதோ, கட்டிட உரிமையாளர், கட்டிடம் முடிவுற்ற 15 நாட்களுக்குள் அல்லது குடியமர்ந்த நாள், இதில் எது முன்கூட்டி வருகிறதோ, அதற்கு முன் சென்னை மாநகராட்சி ஆணையாருக்கு தெரிவிக்கத் தவறினால் ரூ. 50 க்கு மிகாமல், அபராதம் விதிக்கப்படும் என அறிவிக்கப்படுகிறது.

2. இந்த சட்டம் தொடங்கிய நாளிலிருந்து சென்னை மாநகராட்சி ஆணையாளரிடமிருந்து சான்றிதழ் பெறாமல் உள்ள கட்டப்படும் கட்டிடங்களுக்கு ரூ.100 தகு மேற்பட்டு வரி மதிப்பீடு செய்த கட்டிடங்களுக்கும் மோதிய பாதுகாக்கப்பட்ட குடிநீரும், கழிவு நீர் வசதிகளும் செய்து தருவது சட்டத்திற்கு உட்பட்டது ஆகாது என அறிவிக்கப்படுகிறது.

3. தண்ணீரை பயன்படுத்தி தூய்மையாக்கும் கழிப்பிடங்களை அமைப்பது நகரத்தின் சுகாதார நலன் கருதி அடிப்படைத் தேவையானதும் மிக முக்கியமானதும் என ஆணையாளர் கருதுவதால் ஒவ்வொரு வீட்டிலும் அவை அமைக்கப்பட வேண்டுமென வற்புறுத்தப்படுகிறது. தண்ணீரைப் பயன்படுத்தி தூய்மையாக்கும் கழிப்பிடத்துடன் நச்சுத்தொட்டி மலக்குழி அமைத்த வரைபடம் ஒப்புதல் அளிக்கப்பட்டு விட்டதென கருதி, கழிப்பிடம் மலக்குழியுடன் மற்றும் நீர் குழாயுடன் இணைக்க பாதிவிட்டால், ஆணையாளர், சென்னை மாநகராட்சி சட்ட 1919 ன் பிரிவு 186 படி அவருக்கு கொடுக்கப்பட்ட அதிகாரங்கள் மற்றும் உரிமைகளின் அடிப்படையில் நடவடிக்கை எடுக்க தவறி இல்லை என அறிவிக்கப்படுகிறது.

4. அடித்தள மட்டம் கட்டிடத்தின் எல்லையை ஒட்டியுள்ள சாலை அல்லது தெருவின் மையப் பகுதியிலிருந்து 0.91 மீட்டர் உயர்த்தப்பட வேண்டும் சான்று அளிக்கப்பட்ட இடத்திற்கு அப்பால் மொத்த இடத்தில் ஆக்கிரமிப்பு ஏற்படாதவாறும் பக்கத்து வீட்டின் எல்லைக்கு அப்பாலும் ஏற்படாதவாறும் பார்த்துக் கொள்ள வேண்டும். வரத்துப்புறட்ட, ஈரம் ஊடுருவ முடியாத தரை அமைக்கப்பட வேண்டும் கதவு மற்றும் சன்னல்கள் மொத்த இடத்தின் எல்லையை கடந்து ஆக்கிரமிப்பு செய்ய ஏதுவாக வெளிப்பக்கம் திறக்குமாறு வைக்கக்கூடாது. புதுப்பிக்கட்டுகள் விண்ணப்பதாரரின் எல்லைக்குள் அமைய வேண்டும் கட்டிடம் பணிகள் நடக்கும் காலங்களில் மாநகராட்சி அலுவலர்களும் அதிகாரிகளும், பார்வையிட வாய்ப்பு உள்ளதால் மனையில் ஒப்புதல் பெற்ற வரைபடத்தின் நகலை எப்போதும் தயாராக வைத்திருக்க வேண்டும். உதவி செயற் பொறியாளர் மற்றும் சார்நிலை அலுவலர்கள் வரைபடம் கேட்கும்போது காண்பிக்கப்பட வேண்டும்.

5. 1.2 மீட்டர் நீளம் மற்றும் 0.60 மீட்டர் குறைந்தபட்ச அகலமுள்ள பலகையில் திட்ட அனுமதி எண், நாள் அனுமதிக்கப் பட்ட தளங்கள் ஆகியவற்றைக் குறிப்பிட்டு, நன்றாக தெரியும்படி மனையில் வைக்கப்பட வேண்டும்.

6. கட்டிட அனுமதி வழங்கப்பட்ட பிறகு கட்டப்படும் கட்டுமானங்கள், ஒப்புவிக்கப்பட்ட வரைபடங்களிலிருந்து மாறுபடுமானால் உங்களால் செலுத்தப்பட்ட பிணையவைப்புத்தொகை திருப்பத்தரப்பட மாட்டது.

7. கட்டப்படும் கட்டிடத்தின் தரம் IS 486 IS 875, IS 1893 ஆகிய இந்திகட்டிட தரக்கட்டுப்பாட்டு விதிகளின்படி அமைக்கப்பட வேண்டும் மற்றும் கட்டிட வரைபட அனுமதியின் போது கொடுக்கப்பட்ட டிசைன் வரைபடத்தில் காட்டியபடி கெகு கம்பிகள், காங்கிரீட் ஆகியவை கொண்டு கட்டிடம் கட்டப்பட வேண்டும்.

8. மழைநீர் சேமிப்பு அமைப்புகள் வரைபடத்தில் காட்டியபடி அமைக்கப்படாவிட்டால் கட்டிட வரைபடத்திலிருந்து மாறுபட்ட கட்டிடமாக கருதப்பட்டு விதிகளின்படி தக்க நடவடிக்கை எடுக்கப்படும்.

9. கட்டிட அனுமதி மனுதாரர் தனது மனுவில் கொடுத்த தகவல்கள் உண்மைக்கு புறம்பானது தவறுதலான வழக்கத்திற்கு மாறானது மற்றும் மோசடியான வழிமுறை ஆகியவற்றின் பேரில் அளிக்கப்பட்டதாக இருந்தால் கட்டிட அனுமதியை மாற்றவோ முழுமையாக திரும்பப் பெறவோ, சென்னை மாநகராட்சி முனிசிப் சட்டம் 1919 (CCMC Act 1919) பிரிவு 365(4)ன் படி நடவடிக்கை எடுப்பதற்கு ஆணையருக்கு முழு அதிகாரம் உண்டு.

10. பெருநகர சென்னை மாநகராட்சியால் சட்ட பூர்வமாக திட்ட அனுமதி கட்டிட அனுமதி அளிப்பதன் மூலம் விண்ணப்பதாரரின் பெயரில் நில உரிமையினை உறுதிப்படுத்தவில்லை. திட்ட அனுமதி அளிப்பதற்கு முன்பு, விண்ணப்பதாரரின் விண்ணப்பத்துடன் சமர்ப்பித்த ஆவணங்களில் (கிரயப்பத்திரம், குத்தகை பத்திரம், பட்டா தானப்பத்திரம் மொது அதிகாரப் பத்திரம் மேலும் பல) விண்ணப்பதாரர் வளர்ச்சி செய்ய உரிமையுள்ளதா என்று மட்டுமே சரிபார்க்கப்படுகிறது. அதன் மூலம் முதற்கட்டமாக விண்ணப்பதாரருக்கு வளர்ச்சி செய்ய உரிமை உள்ளதா என்று பார்க்கப்படுகிறது. சொத்தினை வாங்க விரும்பும் எந்த நபரும் விண்ணப்பதாரருக்கு சொத்தின் மீது உள்ள உரிமையை தனியாக உறுதிப்படுத்திக் கொள்ள வேண்டும். மேலும், அதன்மேல் வேறு யாரும் தனி நபர் உரிமை கோரினால் அவர்கள் அதனை பொருத்தமான தகுதியுள்ள நீதிமன்றத்தின் முன் தீர்த்துக் கொள்ளலாம். இதனை முடிவு செய்ய பெருநகர சென்னை மாநகராட்சி பொருத்தமான அமைப்பு அல்ல.

11. மனுதாரர் இந்த கட்டிட அனுமதியில் குறிப்பிட்டுள்ள இடத்தில் கட்டிடம் கட்டுவது தொடர்பான பதிவு சான்றிதழ் கட்டாயமாக இயக்குனர் தொழிற்சாலை பாதுகாப்பு மற்றும் சுகாதார் அவர்களிடம் இருந்து பெற வேண்டும். இச்சான்றிதழ் பிரிவு 7, கட்டிடம் மற்றும் கட்டுமான தொழிலாளர் (வேலை வாய்ப்புமுறைப்படுத்தல் மற்றும் சேவை கட்டுபாடு) சட்டம் 1996 ன் படி பெற வேண்டும்.

12. இந்திய அரசு அறிவிப்பு எண் N656, நாள் 24.11.1995 ன் படி இரண்டு அடுக்கு மற்றும் அதற்கு மேற்பட்ட அடுக்குமாடி குடியிருப்பின் தரை தளத்தில் தபால் பெட்டி (Letter Delivery Box) பொருத்தப்பட வேண்டும்.

NO-G ONE

SITE PLAN	SHEET NO. 1 / 2

SITE PLAN

PLAN SHOWING THE PROPOSED CONSTRUCTION OF STILT FLOOR + 4 FLOORS (16.0M HEIGHT) RESIDENTIAL BUILDING WITH 14 DWELLING UNITS AT PLOT NO. 10 & 11, NEW DOOR NO.45 & 47, OLD DOOR NO.25 & 26, RUKMANI ROAD, KALACHATRA COLONY, BESANT NAGAR, CHENNAI 600090 COMPRISED IN OLD S.NO. 161/2 & 161/3 (PART), AND T.S.NO.21, BLOCK NO.51 OF THIRUVANMIYUR VILLAGE WITHIN THE LIMIT OF GREATER CHENNAI CORPORATION.


A) AREA STATEMENT	SQ.M.
AREA AS PER PATTA	779.00
AREA AS PER DOCUMENT	771.46
AREA CONSIDERED FOR FSI	771.46
STREET ALIGNMENT/ ROAD WIDENING/LINK ROAD	0.00
OSR AREA	0.00
TOTAL FSI AREA	1572.28
FSI FACTOR	2.038
COVERAGE AREA (PERCENTAGE %)	NA

A) PARKING STATEMENT


VEHICLE	REQUIRED	PROVIDED
LORRY	-	0
CAR	17	17
TWO WHEELER	2	4
CYCLE	-	6





SOUTH SIDE ELEVATION

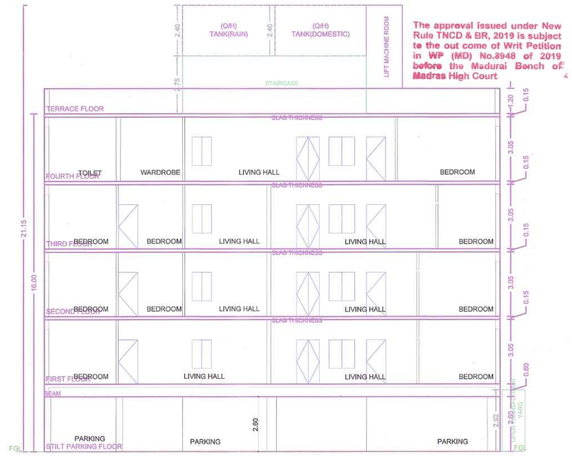


SECTION-AA







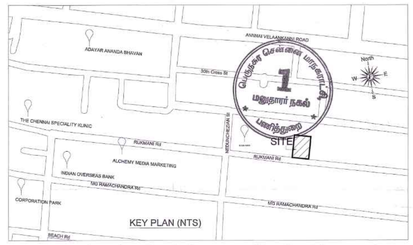


Location plan (Taken as per User Inputs)

AREA STATEMENT


AS PER DOCUMENT	: 771.46 SQM.,
AS PER PATTA	: 779.50 SQM.,
LEAST EXTENT	: 771.46 SQM.,
CRZ AFFECTED AREA	: 294.64 SQM., (AS PER CRZ REPORT)
NON-CRZ AREA	: 476.82 SQM., (AS PER CRZ REPORT)
PERMISSIBLE FSI FOR CRZ (1.50)	: 441.96 SQM.,
PERMISSIBLE FSI FOR NON-CRZ (2.60)	: 1239.73 SQM.,
TOTAL PERMISSIBLE FSI	: 1681.69 SQM.,





SITE PLAN

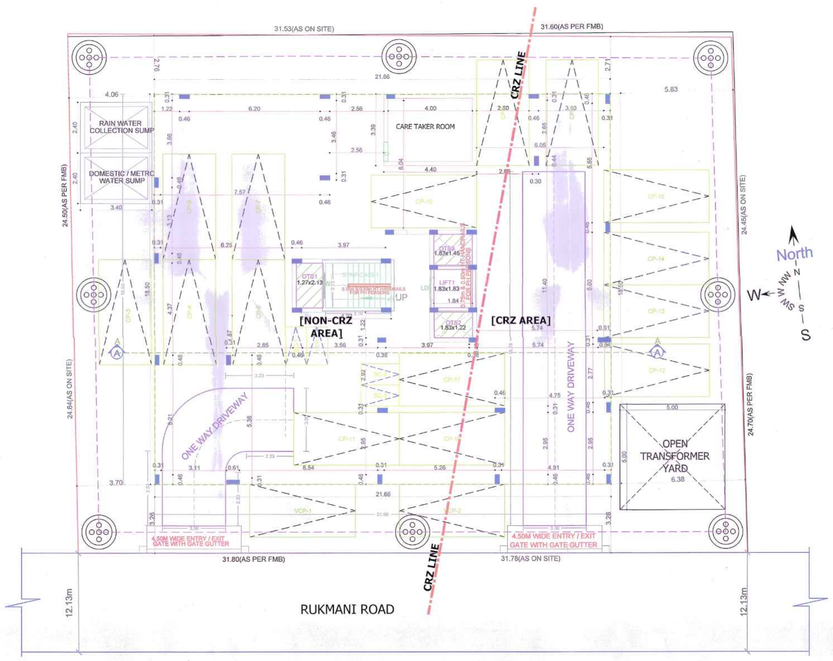

SITE CUM STILT FLOOR PLAN





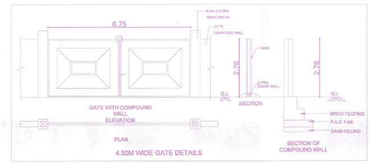

APPROVAL CONDITION

SCALE 1:100

CHENNAI METROPOLITAN DEVELOPMENT AUTHORITY

SUBJECT TO THE CONDITIONS MENTIONED IN THIS OFFICE

Signature valid

For (Deputy Planner / Chief Planner / Member-Secretary)
High Rise Building / Non High Rise Building
This Approval is valid only after building Permit is issued by the concerned Local Body.

QR CODE

Applicants (Owner / Developer / Power of Attorney)

This Planning Permission issued under: New Rule TNCDBR, 2019 is subject to final outcome of the TCP, (MD) No.8948 of 2019 and VAMP (MD) Nos. 6912 & 6913 of 2019.

Signature valid
Digitally Signed by
Architect Name
Sign Date: 08/25/2025 11:01:15 AM

BUILDING WISE FSI STATEMENT

BUILDING	NO OF SAME BUILDING	FSI AREA COMM.	FSI AREA RESI.	FSI AREA IND.	FSI AREA INST.	DU	TOTAL FSI AREA
A-1 (S+4_RE...)		0.00	1572.28	0.00	0.00	14	1572.28
Total		0.00	1572.28	0.00	0.00	14	1572.28

FLOOR WISE FSI STATEMENT: A (S+4_RESIDENTIAL)

FLOORS	FSI AREA COMM.	FSI AREA RESI.	FSI AREA IND.	FSI AREA INST.	DU	TOTAL FSI AREA
STILT PARKING FLOOR	0.00	0.00	0.00	0.00	0	0.00
FIRST FLOOR	0.00	393.07	0.00	0.00	4	393.07
SECOND FLOOR	0.00	393.07	0.00	0.00	4	393.07
THIRD FLOOR	0.00	393.07	0.00	0.00	4	393.07
FOURTH FLOOR	0.00	393.07	0.00	0.00	2	393.07
Terrace	0.00	0.00	0.00	0.00	0	0.00
Total	0.00	1572.28	0.00	0.00	14	1572.28

This is a system generated drawing as per the soft copy submitted by the Architect/ License Engineer


ARCH_E (36.00 x 48.00 Inches)

FLOOR NAME	SHEET NO. 2/2
FLOOR NAME	


PLAN SHOWING THE PROPOSED CONSTRUCTION OF STILT FLOOR + 4 FLOORS (16.0M HEIGHT) RESIDENTIAL BUILDING WITH 14 DWELLING UNITS AT PLOT NO. 10 & 11, NEW DOOR NO.45 & 47, OLD DOOR NO.25 & 26, RUKMANI ROAD, KALACHATRA COLONY, BESANT NAGAR, CHENNAI 600090 COMPRISED IN OLD S.NO. 161/2 & 161/3 (PART), AND T.S.NO.21, BLOCK NO.51 OF THIRUVANMIYUR VILLAGE WITHIN THE LIMIT OF GREATER CHENNAI CORPORATION.

P.P.A approved by
C.M.D.A vide
Lr.No. CMDA/PP/NHRB/3/0695/2025
Dated. 15/10/2025


The approval issued under New Rule TNCD & BR, 2019 is subject to the out come of Writ Petition in WP (MD) No.8948 of 2019 before the Madurai Bench of Madras High Court

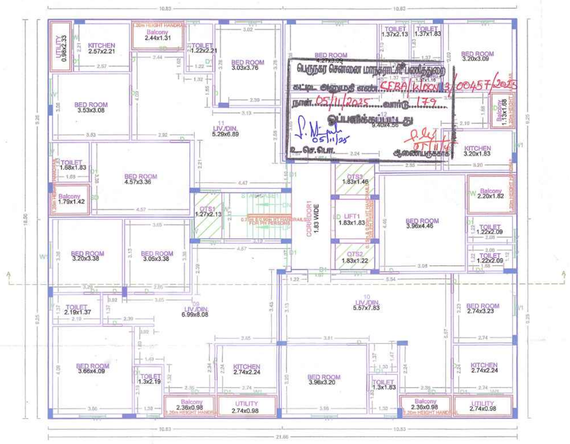


THIRD FLOOR PLAN

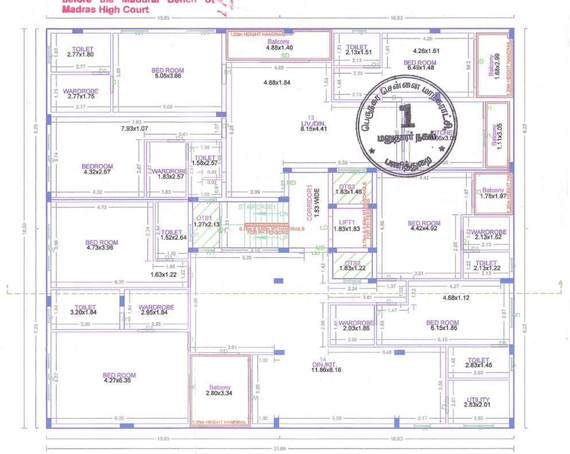


FOURTH FLOOR PLAN

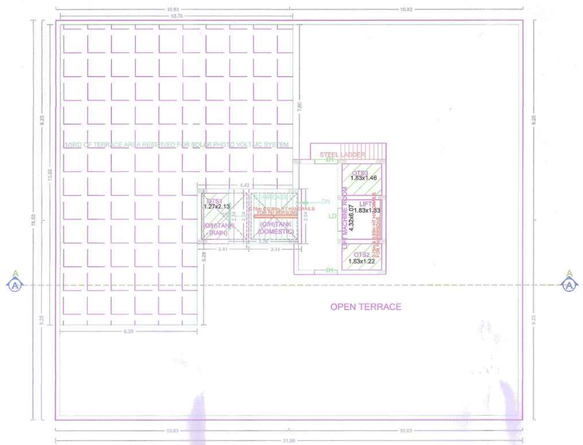

TERRACE FLOOR PLAN

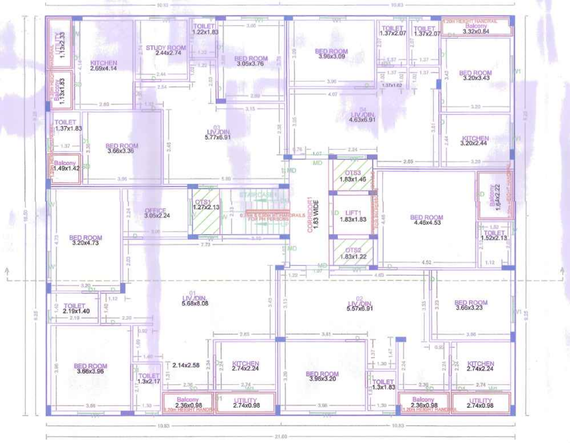

FIRST FLOOR PLAN

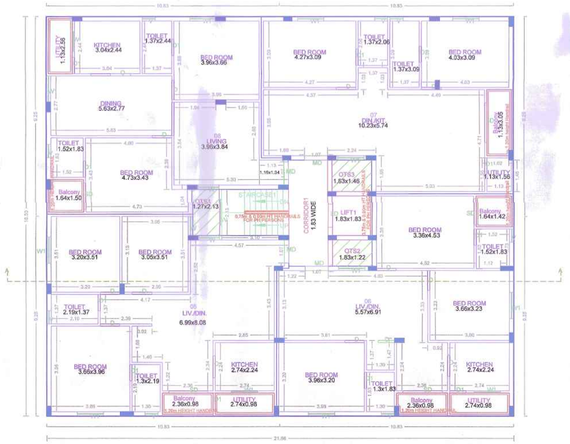

SECOND FLOOR PLAN

APPROVAL CONDITION
SCALE 1:100
CHENNAI METROPOLITAN DEVELOPMENT AUTHORITY
SUBJECT TO THE CONDITIONS MENTIONED IN THIS OFFICE
For (Deputy Planner / Chief Planner / Member-Secretary) High Rise Building / Non High Rise Building This Approval is valid only after building Permit is issued by the concerned Local Body. QR CODE

Owner-3	Owner-4	Owner-5	Owner-6	Owner-7	Owner-8	Owner-9	Owner-10	Owner-11	Owner-12	Owner-13

Applicants (Owner / Developer / Power of Attorney)

This Planning Permission issued under New Rule TNCDBR, 2019 is subject to final outcome of the W.P. (MD) No.8948 of 2019 and VMP (MD) Nos. 6912 & 6913 of 2019.

ISO_A0_(841.00_x_1189.00_MM)

This is a system generated drawing as per the soft copy submitted by the Architect/ License Engineer

RESPONSIBILITY OF THE BUILDER / PROMOTER

1. For High Rise Buildings Structural design has to be vetted by IIT / Anna University. For Non-High Rise Buildings design has to be vetted by Registered Structural Engineer.
2. It is the sole responsibility of the Builder / Promoters that the building is constructed as per the Structural Design vetted / approved by The IIT / Anna University / Registered Structural Engineer as the case may be.

No construction materials shall be placed in the Roads / footpath thereby obstructing the usage of It.

THE LANDLENS SUITE

Eight ways to know a piece of land before you pay for it.

This report covers one part of the picture. These cover the rest, drawn from the same government records, for any property in Tamil Nadu.

LandLens One
Ask anything about a property and get an answer grounded in live government records, with the sources shown.
/landlens/one

Verify My Land
Every record check run on one property and returned as a single report.
/landlens/verify-my-land

Legal Opinion
An advocate's written opinion on the title, built on the records we pull for it.
/landlens

One Map
Every layer on one map: the parcel, its boundary, zoning, water bodies and what sits around it.
/landlens/one/map

PriceMap
What land actually changed hands for around this plot, taken from the registered deeds.
/landlens/pricemap

Build Scope
What you are allowed to build here: floor space, height, coverage and setbacks.
/landlens/build-scope

Property Tracker
Watch a property and hear about it when something new is registered against it.
/landlens/property-tracker

Deal Room
Run the transaction in one place: documents, stamping, signatures and the parties.
/landlens/deal-room

FREE TOOLS · NO ACCOUNT NEEDED

Twenty-four checks you can run yourself, at no cost.

Records and verification

The registers themselves, read for you.

- Encumbrance Certificate
- Patta and Chitta
- Field Measurement Sketch
- EC Analyzer
- Bank charge check
- Court case search
- Seller background check
- Approval check by survey

Value and duty

What it is worth and what it costs to register.

- Guideline value by street
- Guideline value by survey
- Stamp duty and registration fees
- Capital gains
- Floor space index
- Area unit converter

Zoning and land use

What the plan says can happen on this land.

- Land use zone finder
- CMDA land use check
- Coastal regulation zone
- Master plan check
- Water bodies finder
- Airport height clearance

Registers and directories

Who holds it, and which office keeps the record.

- Find your registering office
- Temple property check
- Waqf property check
- RERA register

Every free tool
/tools

Services we run for you
/services

The LandLens suite
/landlens/one

Verified RealEstate™

Every claim in this document traces back to a government record.

- Legal opinions, due diligence and title verification
- Building plan, layout and sub-division approvals
- Completion and occupancy certificates, regularisation
- Escrow, negotiation and NRI property management
- Land survey, soil testing, architecture and construction

Verified RealEstate
3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai 600 097, India
hello@verified.realestate
+91 9996 12 9996

Prepared from the registers named on the page each finding sits on. Where a register could not be read, this document says so in its place rather than leaving the gap to be read as a clean result.